

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	$L \pm .03$ [0,8]	$W \pm .01$ [0,3]	$C \pm .02$ [0,5]	$M \pm .03$ [0,8]	$H \pm .01$ [0,3]
E18-6FB	#6	M3	.63 [16,00]	.30 [7,62]	.21 [5,33]	.49 [12,45]	.15 [3,81]
E18-8FB	#8	M4	.69 [17,53]	.32 [8,13]	.25 [6,35]	.53 [13,46]	.17 [4,32]
E18-10FB	#10	M5	.71 [18,03]	.35 [8,89]	.25 [6,35]	.55 [13,97]	.20 [5,08]

UL & CSA TOOLS


CT-100A
CT-200
CT-600-A (CT-570CH)
CT-1570
CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS

CT-160
CT-260

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - #22-18 AWG [0,5-1,0 mm²] SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX. OPERATING TEMPERATURE
 - 2000 VOLTS MAX
- MATERIAL:
 - STAMPING: .032" [0,8] THK COPPER, TIN PLATED
- WIRE STRIP LENGTH: 9/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

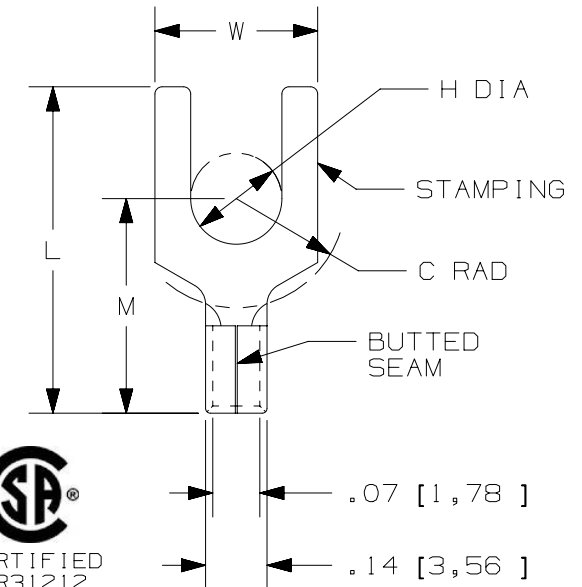

TITLE			
STRONGHOLD FORK TERMINAL NON-INSULATED, BUTTED SEAM #22-18 AWG			
CUSTOMER DRAWING			
ITEM REVISION NAME		00123SHM/00	
DATASET FILE NAME		00123SHM_DC/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XX ±		.XXX ± ANGLES ±	
THIRD ANGLE PROJECTION		SEE NOTES	
DRAWN BY JHNU		DATE 2/18	CHK TMR
SCALE N.T.S.		DRAWING NUMBER: SH41461	
SHEET 1 OF 1		SIZE A	

00	2/18	JHNU	TMR	RGB	RELEASED	00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[E18-10FB-L](#) [E18-6FB-L](#) [E18-8FB-L](#) [E18-6FB-Q](#) [E18-8FB-Q](#) [E18-10FB-Q](#)