




Connectors > PCB Connectors > PCB Headers & Receptacles

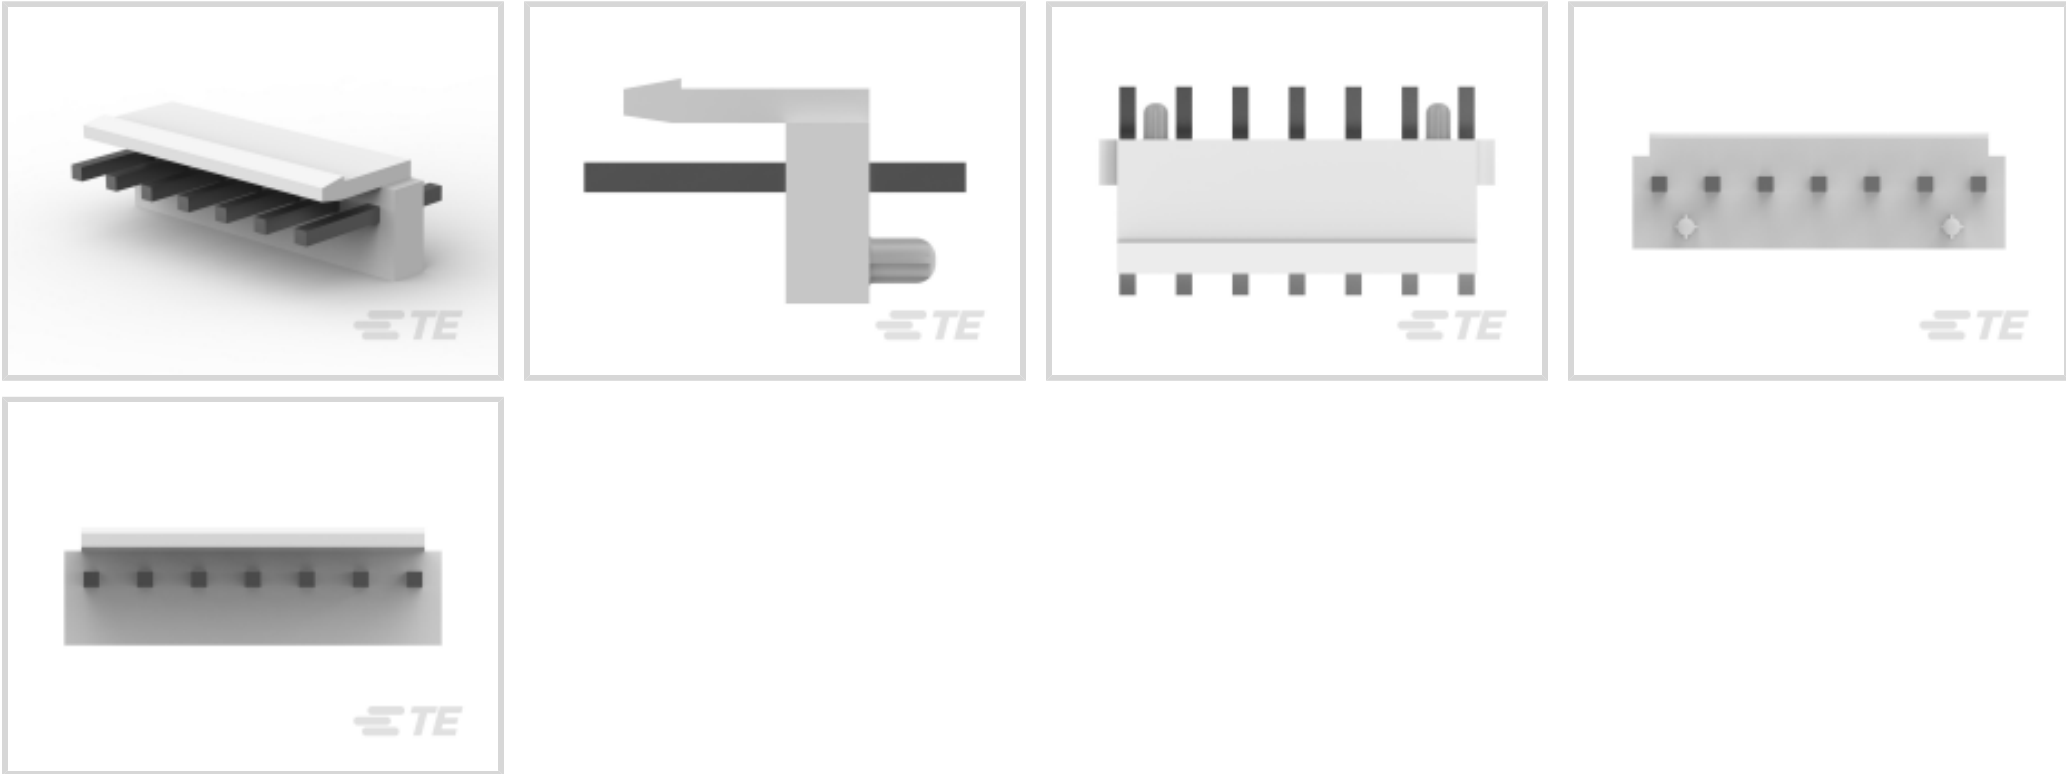

Connector System: **Wire-to-Board**

Number of Positions: **7**

Number of Rows: **1**

Centerline (Pitch): **3.96 mm [.156 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Power Positions	7
Number of Loaded Positions	7
Number of Positions	7
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Mating Area Length	7.7 mm[.303 in]
PCB Contact Termination Area Plating Material Thickness	3 µm[118.11 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	1 µm[39.37 µin]
Contact Mating Area Plating Material Thickness	3 µm[118.11 µin]
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Termination Features

Termination Post & Tail Length	3.69 mm[.145 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Pegs
Mating Retention	With
Panel Mount Feature	Without
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Housing Material	Nylon 66
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	27.72 mm[1.09 in]
Connector Height	9.4 mm[.37 in]



Connector Width	8.6 mm[.339 in]
-----------------	-----------------

PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
-----------------------------	----------------

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	500
--------------------	-----

Packaging Method	Package
------------------	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Wave solder capable to 265°C
---------------------------	------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1744416-7 7 POS EP II HSG, GLOW WIRE	TE Part # 2132781-7 07P EP-II HOUSING, NATURAL	TE Part # 2-1744057-7 3.96 EP HDR ASSY 7P W/PEGS, BLUE	TE Part # 1744544-7 EP II TPA 07P, BLACK

Also in the Series | Economy Power

Connector Contacts(15)	Connector Hardware(2)	Insertion & Extraction Tools(1)	PCB Headers & Receptacles(400)
Rectangular Connector Housings(1)	Rectangular Power Connectors(64)	Wire-to-Board Connector Assemblies & Housings(142)	

Customers Also Bought

TE Part #3-640441-5 05P MTA100 CONN ASSY WHT	TE Part #2132781-7 07P EP-II HOUSING, NATURAL	TE Part #1744144-1 EP-II CONTACT LANCELESS, 22-18	TE Part #1744489-7 3.96 EP HDR ASY 07P NO PEG, GW



TE Part #8-2176087-6
RP 1J 0.166W 536R 0.1% 25PPM 1K RL

TE Part #4-2176370-4
RQ 0603 1K21 0.1% 10PPM 5K RL

TE Part #6-2176370-9
RQ 0603 2K21 0.1% 10PPM 5K RL

TE Part #1-2176371-2
RQ 0603 6K04 0.1% 10PPM 5K RL

TE Part #1634202-6
PRGSB1-16F-BG000

TE Part #5-1437723-9
T2310-P24=PLASTIC PLUG,23-24P

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_1744057-7_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1744057-7_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1744057-7_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1773885-9 Economy Power Connectors

English

7-1773458-5_ECONOMY_POWER_QRG

English

Product Specifications

Application Specification

English

Agency Approvals

VDE Certificate

English

1744057-7

PCB Mount Header, Vertical, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power

