

AIMB-B2275

Embedded Mini-ITX Chassis with One Expansion Slot

NEW



Features

- Economical embedded chassis for Mini-ITX motherboard
- Front LED indicators for system fault detection
- One expansion slot (low profile)
- Reserved USB, COM, and WLAN antenna punchouts on front panel
- Two Shock Resistant 2.5" drive bays
- Two SKUs, to support both ATX power supply & AC-DC power adaptor



Specifications

Model Name		EPC-B2000				EPC-B2000			
Order Number		AIMB-B2275SG-15ZE				AIMB-B2275SG-00YE			
Drive Bay	Slim Optical Disk Drive and HDD	2.5" HDD*2 or 2.5" HDD*1 + slim ODD*1				2.5" HDD*2 or 2.5" HDD*1 + slim ODD*1			
Cooling	Fan	2 (7cm/39.45CFM each) / 1 CPU Cooler				1 (7cm/39.45CFM) / 1 CPU Cooler			
System Spec	CPU	i7-6700	i7-6700TE	i5-6500	i5-6500TE	i3-6100	i3-6100TE	Pentium G4400/4400TE	Pentium G3900/3900TE
	Core Number	4	4	4	4	2	2	2 / 2	2 / 2
	Max Speed	3.4GHz	2.4GHz	3.2GHz	2.3GHz	TBD	2.7GHz	3.3GHz / 2.9GHz	2.8GHz / 2.6GHz
	TDP	65W	35W	65W	35W	51W	35W	54W / 35W	51W / 35W
	Memory	Two 260-pin SO-DIMM up to 32GB DDR4 2133 MHz SDRAM							
Front IO	USB	4 (Optional)				4 (Optional)			
	Serial	4 (Optional)				4 (Optional)			
	WLAN Antenna	2 (Optional)				2 (Optional)			
	Miscellaneous	Power and HDD LED x1 , RST Button x1, Power Switch x1							
Rear IO	CRT	1				1			
	HDMI	1 (HDMI 2.0 or HDMI 1.2)				1 (HDMI 2.0 or HDMI 1.2)			
	Display Port 1.2	1				1			
	Ethernet	2				2			
	USB	4 (USB 2.0)				4 (USB 2.0)			
	Audio	3 (Mic in, Line out, Line in)				3 (Mic in, Line out, Line in)			
	Serial	1 (RS232, supports 5V/12V)				1 (RS232, supports 5V/12V)			
	Phoenix Connector	0				1			
	AC Power Input	1				0			
	Expansion slot	1 (low profile)				1 (low profile)			
Environment	Operating Temperature	0 ~ 40 °C (32 ~ 104 °F)				0 ~ 40 °C (32 ~ 104 °F)			
	Non-operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)				-20 ~ 60 °C (-4 ~ 140 °F)			
	Humidity	10 ~ 85% @ 40 °C, non-condensing				10 ~ 85% @ 40 °C, non-condensing			
	Vibration (5 ~ 500 Hz)	1 Grms (HDD*1+ODD*1); 0.5 Grms (HDD*2)				1 Grms (HDD*1+ODD*1); 0.5 Grms (HDD*2)			
	Shock	10G (with 11ms duration, half sine wave)				10G (with 11ms duration, half sine wave)			
	Certification	CE/FCC/CCC				CE/FCC/CCC			
Physical Characteristics	Dimensions (W x H x D)	250 x 98 x 255 mm (9.84" x 3.86" x 10.04")				250 x 98 x 255 mm (9.84" x 3.86" x 10.04")			
	Weight	3.8 kg				3.1 kg			

* Top drive bay supports max. 12.5mm height HDD or slim ODD; Bottom drive bay supports max. 9.5mm height HDD.

Front View



Internal View




Rear View



Dimensions

Unit: mm [inch]

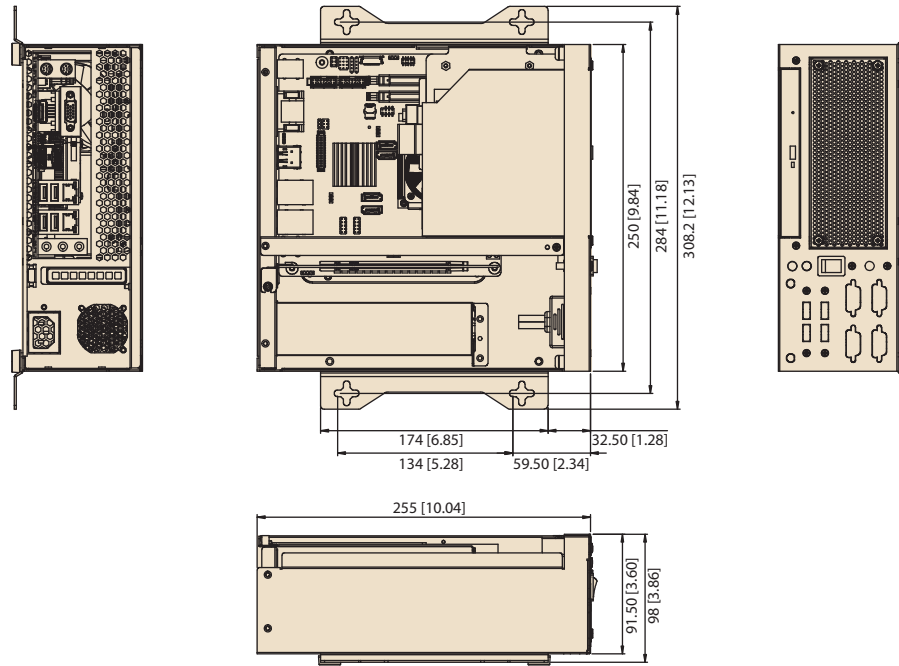

Ordering Information

Model Name	Part Number	Power Supply	Supported MB	Certification
EPC-B2000	AIMB-B2275SG-15ZE	ATX 150W	AIMB-275G2-00A1E	CE/FCC/CCC
	AIMB-B2275SG-00YE	Optional external AC-DC Adaptor 120W with Phoenix Connector	AIMB-275G2-00A1E	CE/FCC/CCC

Power Supply Options

Part Number	Watts	Input	Output	Safety
96PS-A150WFX-1	150 W	AC 100 ~ 240 V	+3.3 V @ 10 A, +5 A @ 13 A, +12 V @ 10 A, +5 vsb @ 2 A, -12 V @ 0.3 A	CE/FCC/CCC/UL/CB/TUV
96PSA-A120W12P4	120W	AC 100 ~ 240 V	12 V, 10A	CE/FCC/CCC/UL/CB/KC/PSE/GS/GOST R

Packing List

Part Number	Description	AIMB-B2000-15ZE	AIMB-B2000-00YE
		Quantity	
1700018910	SATA Cable	2	2
1700021185-01	SATA Power Cable (2 Ports)	1	0
1700023417-01	Fan cable 3p to 4p	2	1
1960057977N000	HDD Holder FOR AIMB-B2000	1	1
1990015239T000	Rubber Damper on HDD Holder	4	4
1990009411T000	Mylar 94X69 for HDD	2	2
1930004607	M3x4 Screws For HDD#1,#2	8	8
1930000002	M4x8 Screws For HDD Holder	4	4
1960014487T001	Wall Mount Bracket	2	2
1990012452S000	Rubber Foot	4	4
1930003238	M3x5 Screws For Rubber Foot/Wall Mount bracket	4	4
1935020330	M2x3 Screws For Slim ODD	4	4
1939000361	M3x6 Screws For Main Board	4	4
2066B20000	CD for AIMB-B2000 User Manual V1.00	1	1
2190000902	CARDBOARD-WARRANTY REV. A2	1	1

Optional Accessories

Part Number	Description
96SDVR-8X-ST-HL-B	Slim DVD-ROM
1700023474-01	2 port USB cable, F10p/2.0, lock 10-pin(right-up), 345 mm
1700018971	SATA HDD cable for AIMB-226/231/281/203/274
1700011772	SATA power cable for slim ODD for AIMB-274/273/272/270/203 with AIMB-B2000-15ZE
1700023646-01	SATA power cable for slim ODD for AIMB-231/230/225/224/223/215/214/213 with AIMB-B2000-00YE
1700023647-01	SATA power cable for slim ODD for AIMB-212 with AIMB-B2000-00YE
1700000596	Power cable 3-pin 183cm, China type
1702031801	Power cable 3-pin 183cm, UK type
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, Europe type