

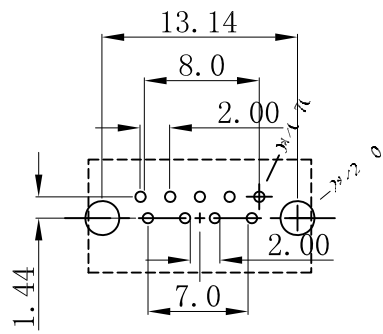
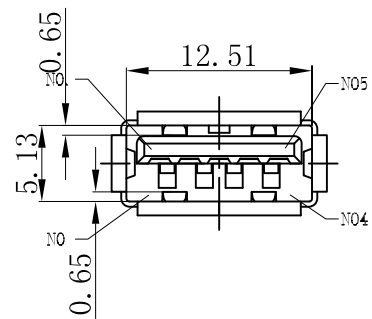
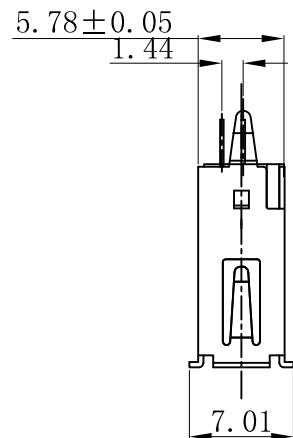
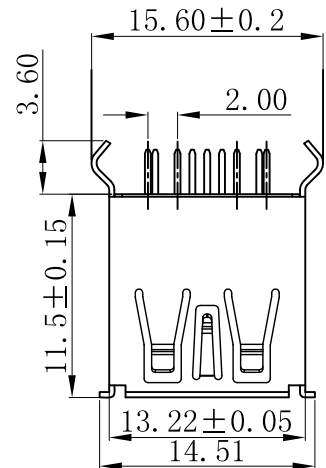


由Autodesk 教育版产品制作

由Autodesk 教育版产品制作



RECOMMENDED P.C.B. LAYOUT(±0.05)



- NOTES:
- 1.ELECTRONIC:  
CONTACT RESISTANCE: 30mohm MAX  
INSULATION RESISTANCE: 1000 Mohm MIN  
WITHSTAND VOLTAGE:AC 500V,1min.
  - 2.MECHANICAL:  
DURABILITY: 1500 CYCLE.
  - 3.ENVIRONMENT CHARACTERISTICS:  
OPERTING TEMPERATURE:-55? TO +105?
  - 4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

|     |           |     |               |                 |
|-----|-----------|-----|---------------|-----------------|
| 5   | SHELL     | 1   | COPPER ALLOY  | NI PLATED       |
| 4   | 5PIN      | 5   | COPPER ALLOY  | AU/TIN PLATED   |
| 3   | 4PIN      | 4   | COPPER ALLOY  | AU/TIN PLATED   |
| 2   | COVER     | 1   | THERMOPLASTIC | (UL 94V-0) BLUE |
| 1   | HOUSING   | 1   | THERMOPLASTIC | (UL 94V-0) BLUE |
| No. | PART NAME | QTY | MATERIAL      | REMARK          |

产品图  
PRODUCT CHART DWG

公差一览表  
TOLERANCE UNLESS OTHERMSE

|      |        |      |       |
|------|--------|------|-------|
| X.   | ±0.15  | X.   | ±5.°  |
| .X   | ±0.10  | .X   | ±2.°  |
| .XX  | ±0.01  | .XX  | ±1.°  |
| .XXX | ±0.002 | .XXX | ±0.5° |

深圳市精拓金电子有限公司

|             |          |               |     |                          |                                       |
|-------------|----------|---------------|-----|--------------------------|---------------------------------------|
| 单位<br>UNITS | MM       | 制图<br>DRAWING | 邱建辉 | 制图料号<br>PRODUCT PART NO. | 916-152A205EY10200                    |
| 比例<br>SCALE | 1:1      | 审核<br>CHKD    | 郭治富 | 产品名称<br>PRODUCT NAME     | USB AF 3.0/180度11.5弯脚有边<br>铜壳LCP蓝胶24H |
| 日期<br>DATE  | 20160728 | 核准<br>APPD    | 黄国荣 | 角法<br>VIEW               |                                       |
|             |          |               |     | 版本<br>VER                | AD                                    |

由Autodesk 教育版产品制作