
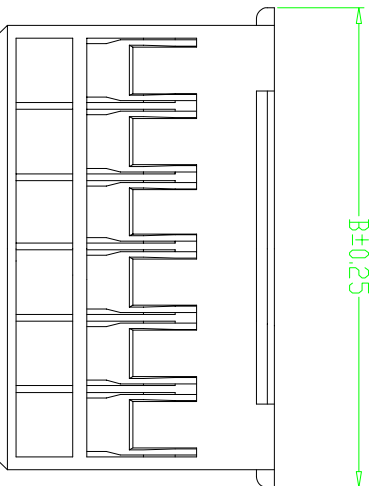



SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Housing:Nylon66, UL94V-0

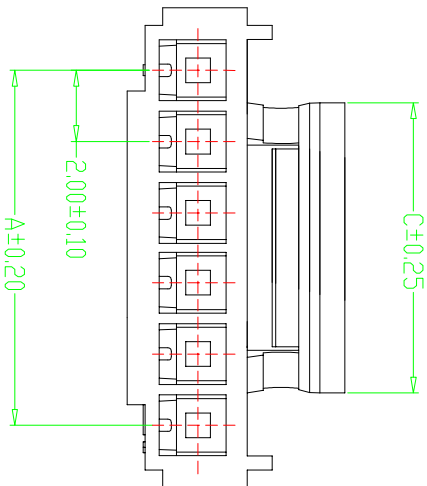


编 号	尺寸 (mm)		
	A	B	C
A2006-02Y	2.00	5.50	2.30
A2006-03Y	4.00	7.50	2.30
A2006-04Y	6.00	9.50	4.30
A2006-05Y	8.00	11.50	4.30
A2006-06Y	10.00	13.50	8.30
A2006-07Y	12.00	15.50	10.30
A2006-08Y	14.00	17.50	12.30
A2006-09Y	16.00	19.50	12.30
A2006-10Y	18.00	21.50	12.30
A2006-11Y	20.00	23.50	16.30
A2006-12Y	22.00	25.50	16.30
A2006-20Y	38.00	41.50	16.30

泰华电子有限公司

TaiHua Electronics Co., Ltd

单位	UNIT	mm	泰华电子有限公司 TaiHua Electronics Co., Ltd		
比例	SCALE				
核准:		版本: A0	产品名称	HV孔座	
APPROVED BY		页次: I/1	产品料号	TH-A2006-NY	
审核:		日期:	客户料号		
CHECKED BY		制图: 封文辉	客户料号		
.xxx±0.005, xxx ±		DRAWN BY	2022.9.5		



x. ±0.5

. x ±0.30

. xx ±0.20

. xxx ±0.005, xxx ±