


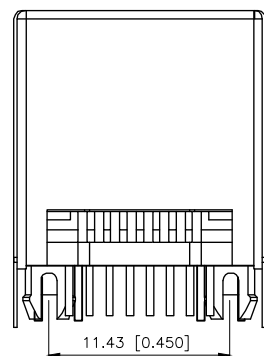
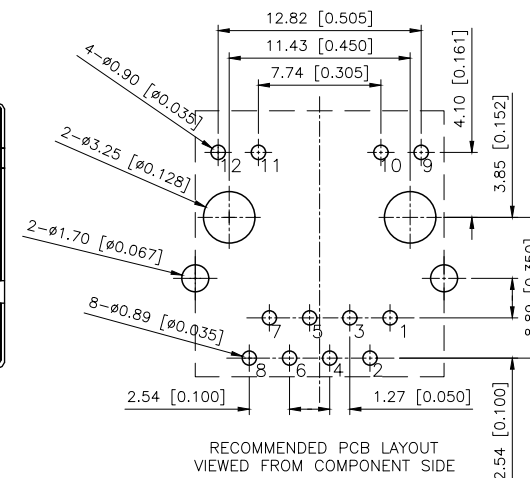

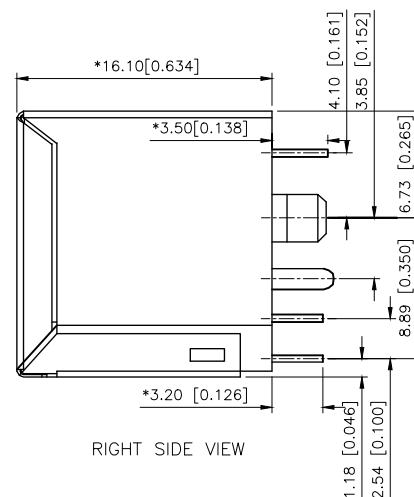
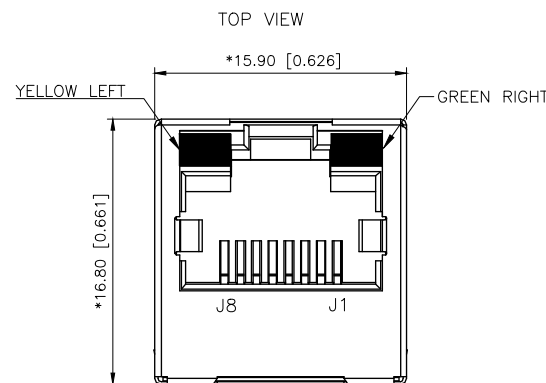


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.04.24	阿树

MATERIAL 材料:	A0
HOUSING 外壳: PA46,UL94V-0,BLACK.	A1
TERMINAL 端子: PHOSPHOR BRONZE T=0.46MM,GOLD PLATING	
SHIELD 保护物: C2680,T=0.20MM,20U" MIN NICKEL PLATING ON ALL AREA	
MECHANICAL 机械:	
DURABILITY 耐用性: 750 CYCLES MIN,12.5MM/MINUTE.	
INSERTION FORCE 插入力:2.2KG.F MAX	
RETENTION STRENGTH 保持力:7.7KG.F BETWEEN JACK AND PLUG.	
OPERATING TEMPERATURE 工作温度: -40°C~+85°C.	
STORAGE TEMPERATURE 储存温度: -40°C~+85°C.	
ALL CRITICAL DIMENSIONS WITH "★"	
ELECTRICAL 电气:	
VOLTAGE 电压: 125 VOLTS AC.	
CURRENT RATING 电流额定值: 1.5AMP.	
DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN	
INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.INITIAL	
AFTER 500V DC FOR 1 MINUTE.	
CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX.	
INITIAL 50 MILLIOHMS MAX. AFTER	
DURABILITY TEST.	



X05ADAC1A3DYX027

— 1: Au = 1 U"
3: Au = 3 U"
4: Au = 6 U"
5: Au = 15 U"
6: Au = 30 U"
7: Au = 50 U"

LED Specification

Standard LED Color	LED Wavelength	Forward (A)	Forward (V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: RJ JACK
CHECKED		UNIT: mm/in	PART NO.: X05ADAC1A3DYX027
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1