
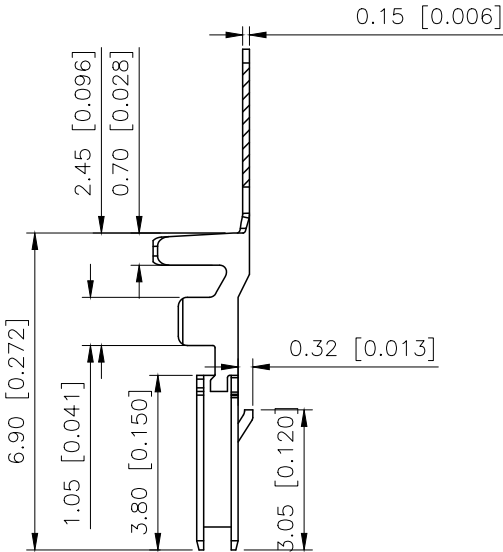


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.06	阿树

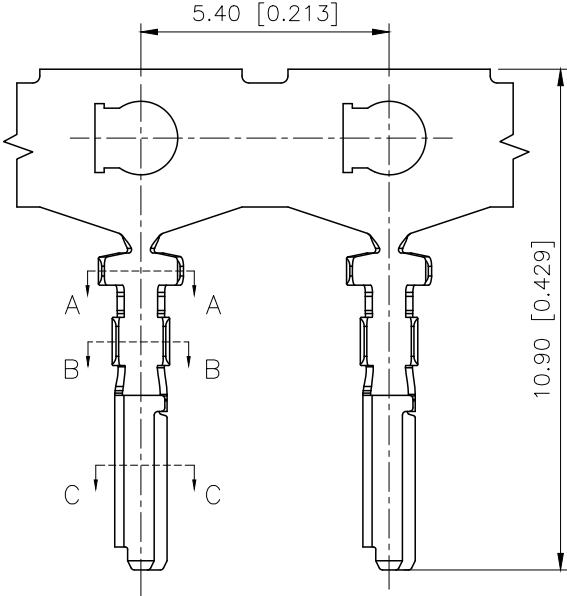


- SPECIFICATIONS
- Voltage rating:350V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ


PART NO.:

X1515 T-P SN
① ② ③ ④


- ①Series No
②Category:T-terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating




SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



SECTION:C-C
SCALE:1:1

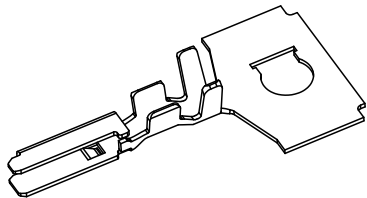

X1515T-PSN	Phosphor Bronze	AWG#24-28	1.28mm(Max)	Stamping Before Plating :30u" Ni;70u" Sn	X1515H
PARY NO	Matrial	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
1.50mm Crimp Style Connectors
PART NO.:
X1515T-PSN
DWG NO.: