




AMP Mini CT

TE Internal #: 1-353908-3
Housing, Receptacle, Wire-to-Board / Wire-to-Panel / Wire-to-Wire,
13 Position, 1.5 mm [.059 in] Centerline, Crimp, 1 Row, White, AMP
Mini CT

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >
Mini Common Termination (CT) Housings

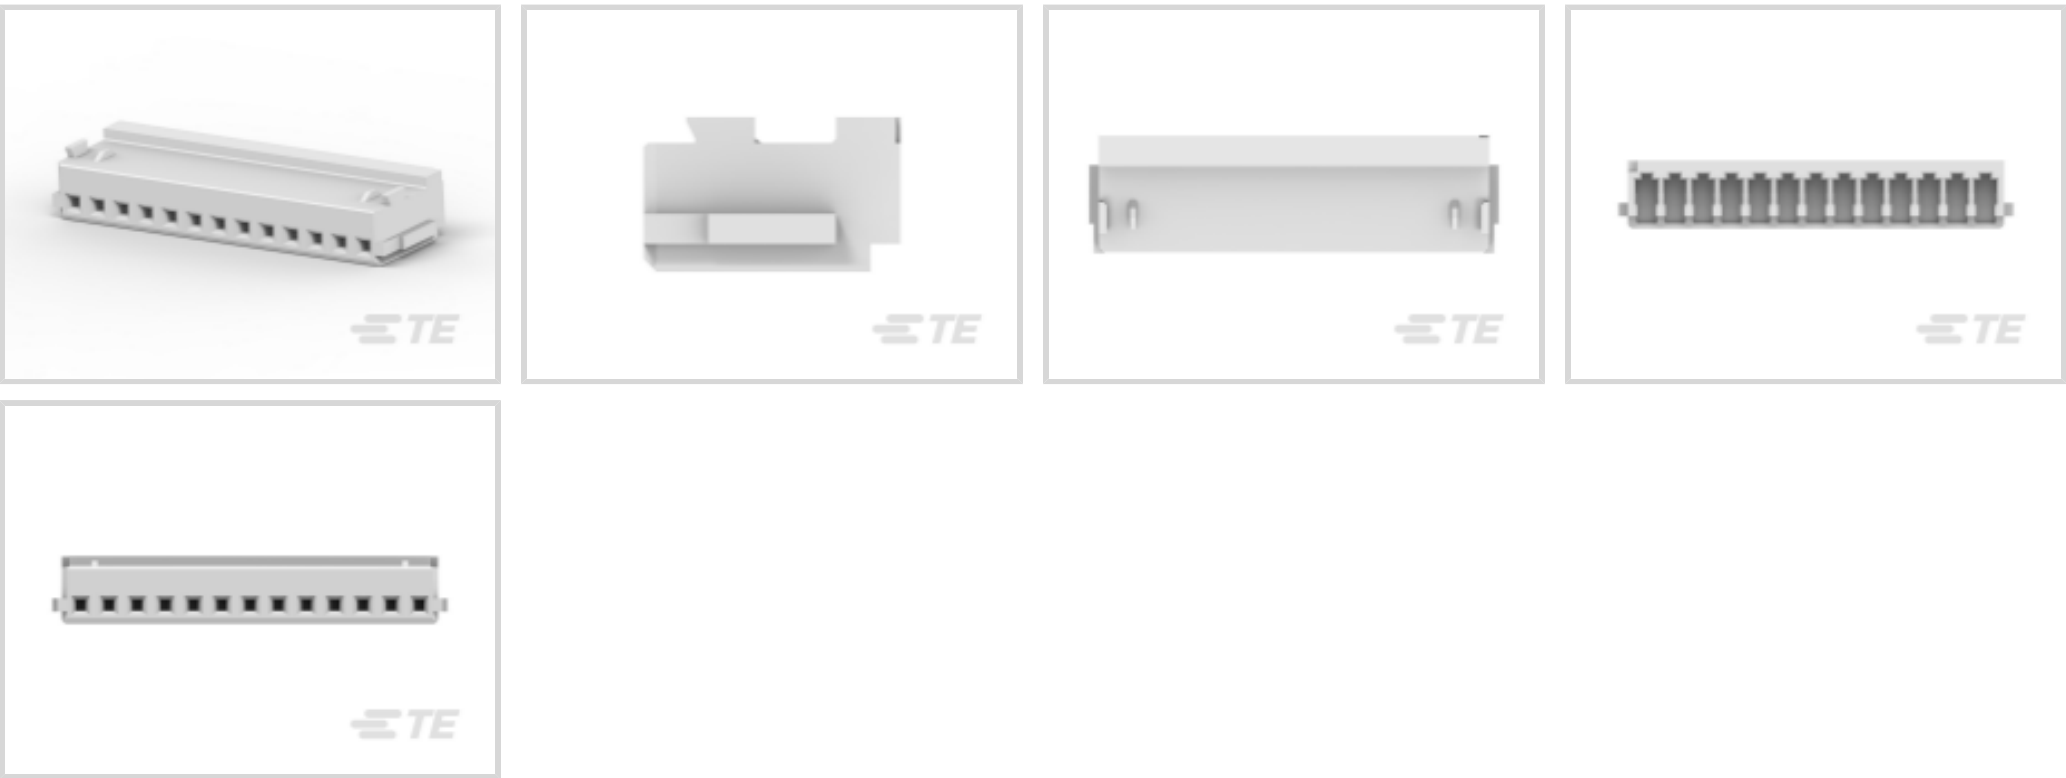

Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Board, Wire-to-Panel, Wire-to-Wire**
Number of Positions: **13**
Centerline (Pitch): **1.5 mm [.059 in]**

[All Mini Common Termination \(CT\) Housings \(38\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	13
Number of Rows	1

Electrical Characteristics

Insulation Resistance	500 MΩ
Operating Voltage	50 VAC



Body Features

Primary Product Color	White
-----------------------	-------

Contact Features

Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Detent
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon 66
Centerline (Pitch)	1.5 mm[.059 in]

Dimensions

Connector Length	21 mm[.827 in]
Connector Height	6 mm[.236 in]
Connector Width	3.6 mm[.141 in]
Compatible Insulation Diameter Range	.85 – 1.05 mm[.033 – .041 in]
Wire Size	.05 – .22 mm²

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	1000
--------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-292206-3
MINI CT SGL DIP H 13P NAT



TE Part # CAT-AM7053-C7671
Mini Common Termination Contacts






TE Part # 1-292215-3
MINI CT SGL RELAY 13P NAT





TE Part # 1-292230-3
1.5 MINI CT SGL V SMT W/BOSS 1

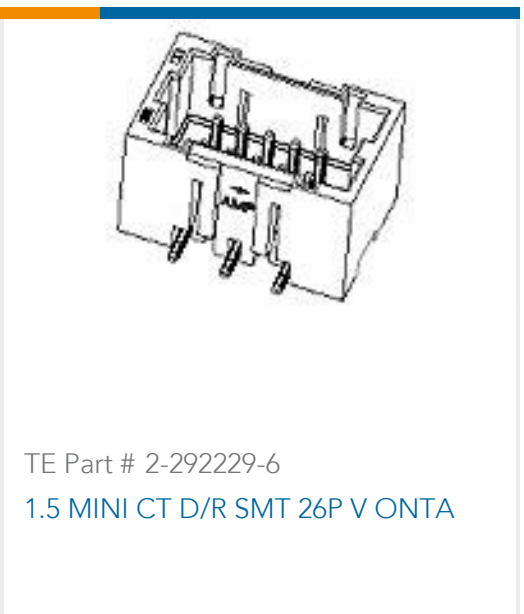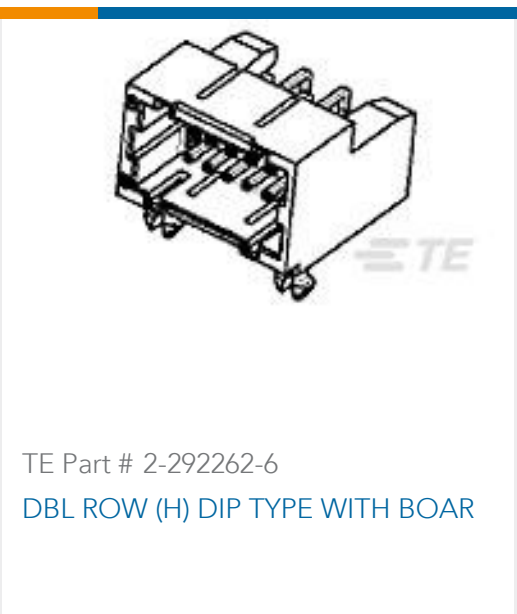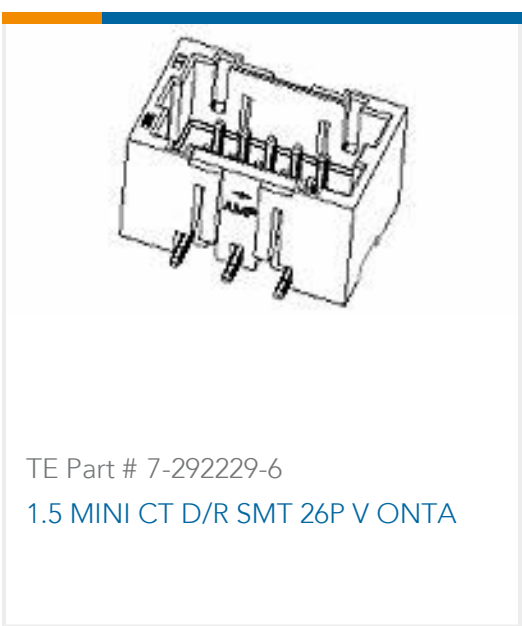

 TE Part # 1-292207-3 MINI CT SGL DIP V 13P NAT	 TE Part # 2-353294-6 AMP MINI D/R HDR HSG 26P NATU	 TE Part # 3-292207-3 MINI CT SGL DIP V 13P BLACK	 TE Part # 2-292216-6 MINI CT D/R RELAY 26P V NAT
 TE Part # 2-292208-6 MINI CT D/R DIP 26P V NAT	 TE Part # 1-292228-3 1.5 MINI CT SGL H SMT W/O BOSS	 TE Part # 1-292227-3 1.5 MINI CT SGL H SMT W BOSS 1	 TE Part # 1-292231-3 1.5 MINI CT SGL V SMT W/O BOSS
 TE Part # 1-292232-3 1.5 MINI CT SGL V SMT W/BOS,PO	 TE Part # 1-292272-3 S/R POST HDR ASSY V DIP AU-PL. 13P GRAY	 TE Part # 2-292229-6 1.5 MINI CT D/R SMT 26P V ONTA	 TE Part # 2-292262-6 DBL ROW (H) DIP TYPE WITH BOAR
 TE Part # 7-292229-6 1.5 MINI CT D/R SMT 26P V ONTA	 TE Part # 7-292208-6 MINI CT D/R DIP 26P V BLUE		

Also in the Series | AMP Mini CT

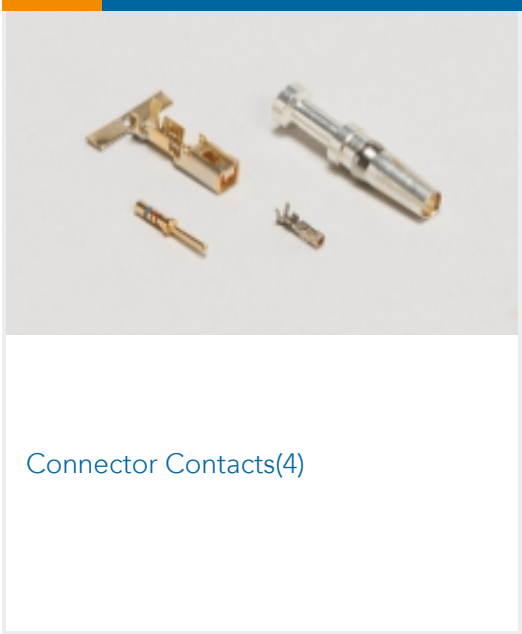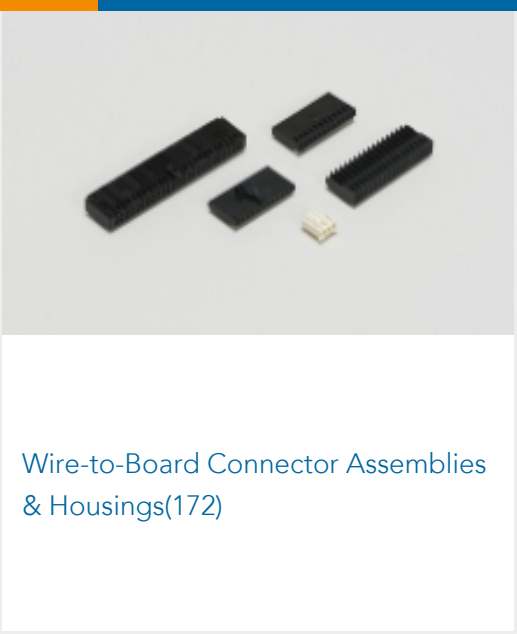 Connector Contacts(4)	 Connector Hardware(10)	 PCB Headers & Receptacles(332)	 Wire-to-Board Connector Assemblies & Housings(172)
--	--	---	---

Customers Also Bought



TE Part #1-353908-0
Mini Common Termination (CT)
Housings

TE Part #640452-5
05P MTA100 HDR ASSY SQ STR

TE Part #1-292230-0
1.5 MINI CT SGL V SMT W/BOSS 1

TE Part #292207-5
MINI CT SGL DIP V 5P NAT

TE Part #6-2271128-2
M12, FEMALE, A CODE, R/A, 12P,
PG9 (AU)

TE Part #1-1625890-2
2W SM M/OX 5% 150R

Documents

Product Drawings

CT REC HSG 13P CRIMP TYPE WHIT

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-353908-3_P.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-353908-3_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-353908-3_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet for Mini CT DC Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

English



1.5mm Pitch Mini CT DC Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector SF Type

Japanese

Instruction Sheet (non U.S.)

Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector Slim Type

Japanese

Instruction Sheet (non U.S.)

Japanese