

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/27/06	

APPROVED: _____

DATE: _____ TITLE: _____

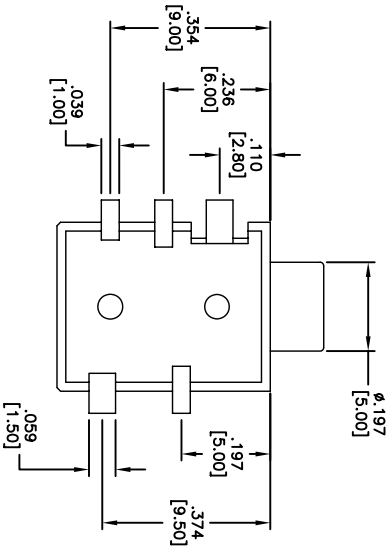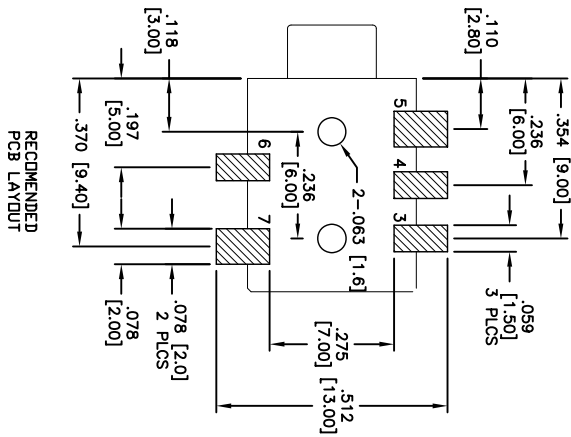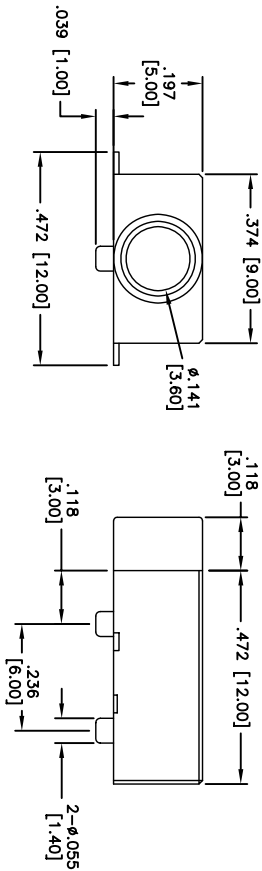

SCHEMATIC

ASJ-16-5	ASJ-16-4B	ASJ-16-3	ASJ-16-3A

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Nylon, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Tin over Copper underplate

Electrical:

Operating voltage: 12 VDC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260 for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

STEREO JACK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE				TITLE			
DRAWN	SS	2/27/06									
CHECKED											
APPROVED											
SIZE				PART NO.				REV.			
X				ASJ-16-XX				-			
REF:				SCALE: NTS				SHEET 1 OF 1			

A

B

C

D

6

5

4

3

2

1