



SPLICE


TE Internal #: 41975

Pigtail Splice / Thru Splice, 20 – 15 AWG Wire Size, .51 – 1.5 mm²

Wire Size, Serrated, 1000 – 3200 CMA Wire Size, Brass, 3 Serration, SPLICE, Splices

[View on TE.com >](#)

Terminals & Splices > Splices

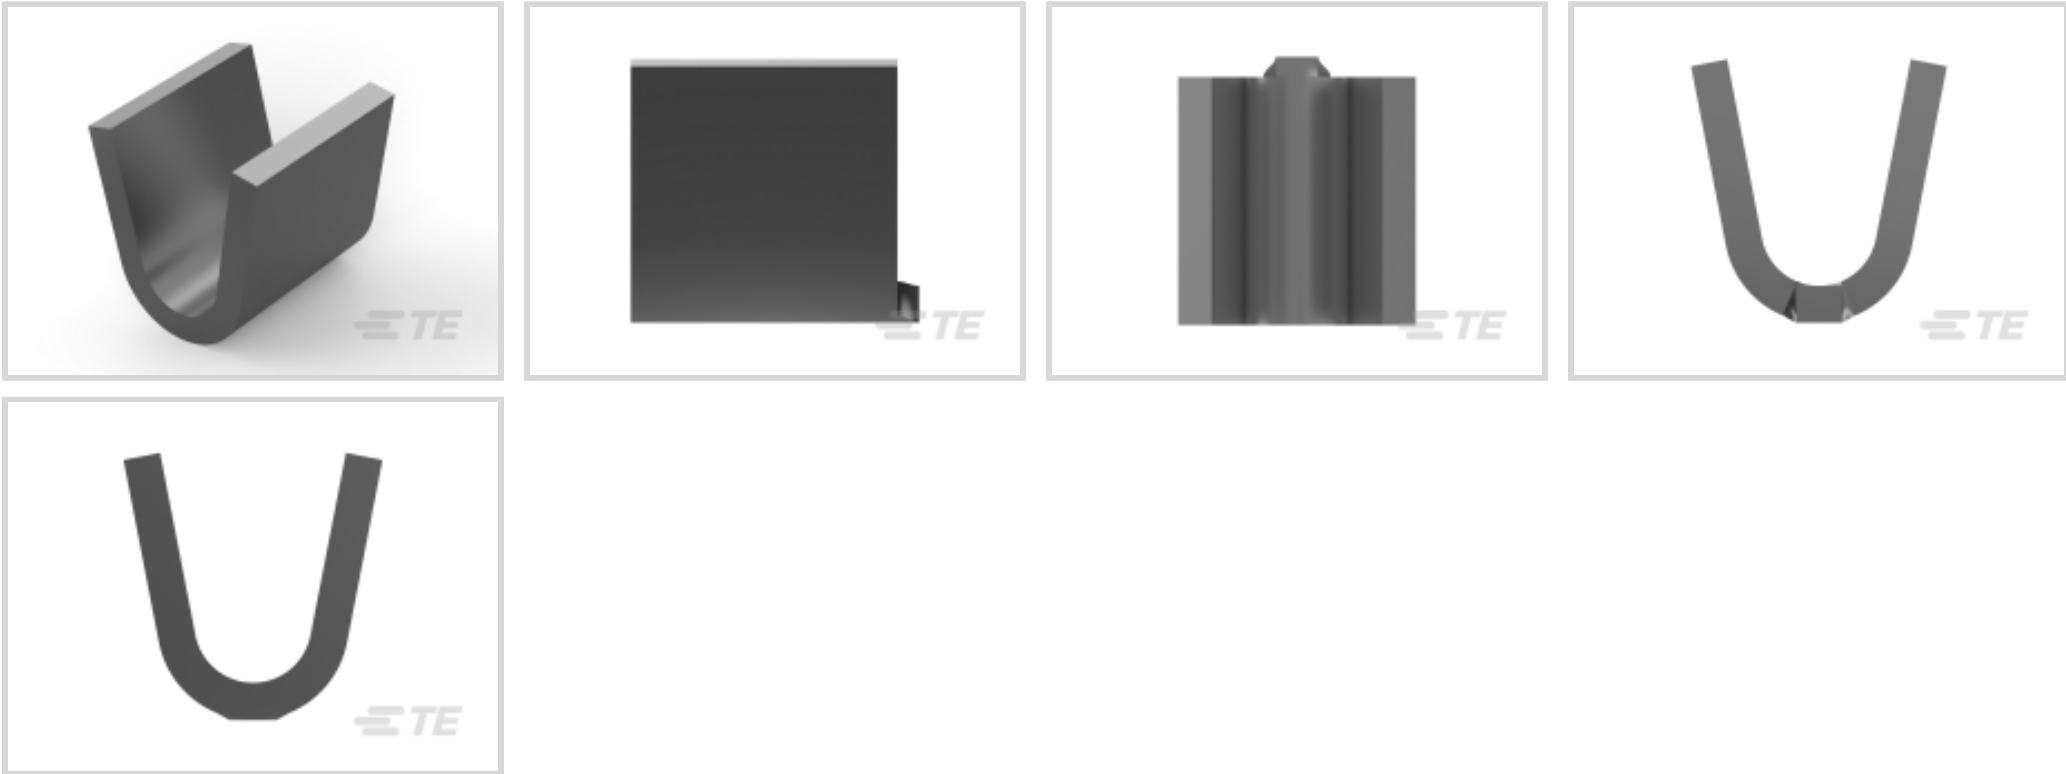

Splice Type: **Pigtail Splice, Thru Splice**

Wire Size: **.51 – 1.5 mm²**

Sealable: **No**

Splice Features: **Serrated**

Features

Product Type Features

Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Serrations	3
Compatible With Wire & Cable Type	Discrete Wire


Body Features

Product Weight	.131 g
Splice Features	Serrated

Contact Features

Contact Base Material	Brass
Barrel Type	Open

Mechanical Attachment



Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	1000 – 3200 CMA
Terminal Material Thickness	.51 mm[.02 in]
Product Length	3.81 mm[.15 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	25000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 60806-1
SPLICE IS 1600-4100 .0126 BR



TE Part # 62754-1
SPLICE 14000-30000 .030 BR

Also in the Series | SPLICE



Crimp Wire Pins, Tabs & Ferrules(1)




Splices(63)


Customers Also Bought



TE Part #DRC26-24SB
PLG, 24P, BLK, N, B




TE Part #40552
SPLICE 3300 TO 9000 CMA TPBR




TE Part #63564-1
SPLICE AMVAR 2000-5400 020BR




TE Part #61299-2
SPLICE 7000-12500 .032 TPBR

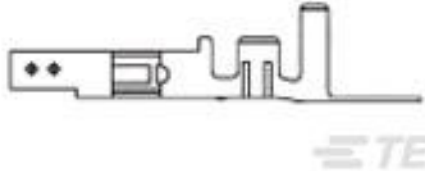

TE Part #1586315-1
VAL-U-LOK SKT BR SN 24-18 LP

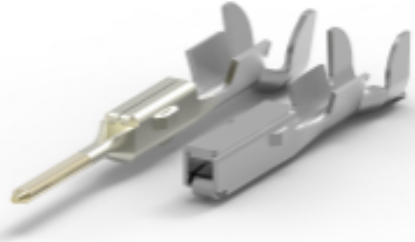

TE Part #2109006-1
MULTILOCK, RECEPTACLE AND TAB

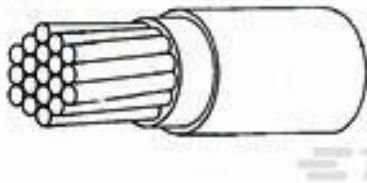

TE Part #282023-000
44A0111-20-3



TE Part #5-2098269-1
10P Plug Assembly (2x5), Gener

Documents

Product Drawings
SPLICE 1000-3200 CMA TPBR
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_41975_M_c-41975-m.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_41975_M_c-41975-m.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_41975_M_c-41975-m.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Application Specification
English

Agency Approvals
CSA Certificate
English