


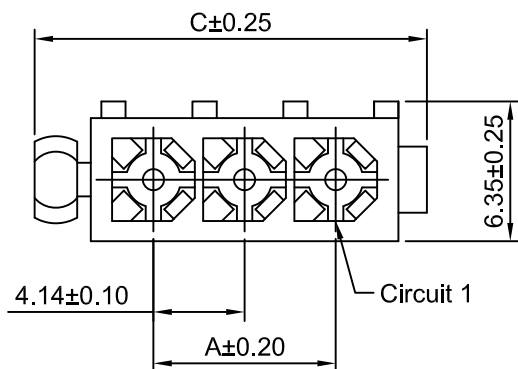


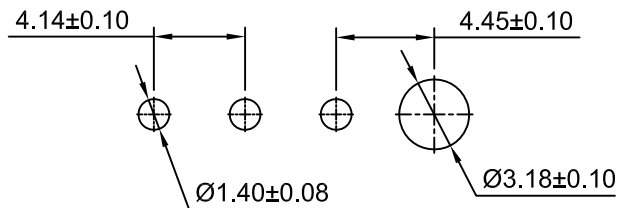


3P

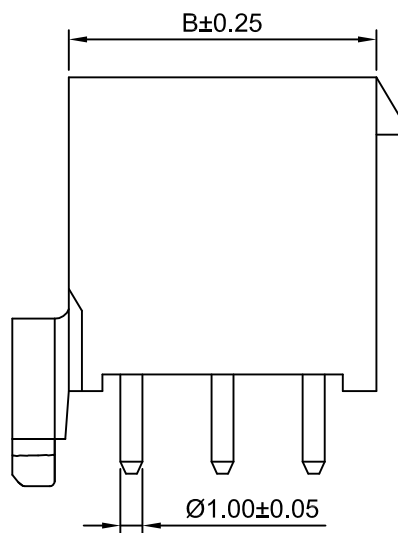

P.C.B LAYOUT



2P

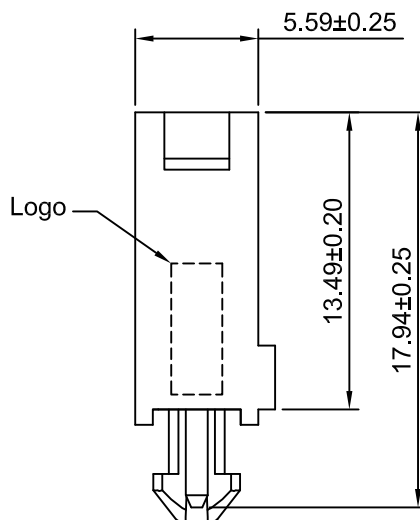

#### Ordering Information:

C4140WV-XP -  $\frac{**}{2}$  -  $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition  
Glow Wire Capable.

3.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel(1u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

#### SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |      |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|------|-------|----------|----------------|-------|-------|
|          | A              | B    | C     |          | A              | B     | C     |
| 2P       | 4.14           | 9.83 | 13.68 | 3P       | 8.28           | 13.97 | 17.82 |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit               | Scale              | Sheet      | TITLE                          |  |
|--------------------|--------------------|------------|--------------------------------|--|
| mm                 | 3:1                | 1 of 1     | 4.14mm PITCH<br>Vertical WAFER |  |
| DRAWN              | CHK'D              | APPR       |                                |  |
| Wenmin Luo         | Diankui Wan        | Jack Yin   | DRAWING NO.                    |  |
| General Tolerances |                    |            | C4140WV-XP                     |  |
| A1                 | CHANGE THE DRAWING | 2021.08.26 | REV                            |  |
| A0                 | NEW RELEASE        | 2015.04.13 |                                |  |
| REV                | DESCRIPTION        | DATE       | A1                             |  |