


Quartz Crystal


SMD-version

model	KX – 9AT
frequency	14,74560 MHz
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 30 ppm
temperature tolerance -40° ~ + 85°C	± 100 ppm
load capacitance C _L	16 pF
series resonance R1 max.	60 Ohm
aging (first year) max.	± 2 ppm
shunt capacitance C _O max.	5,0 pF
drive level in mW max.	0,05
AECQ 200	yes
internal blank fixation:	3 point
contents of reel	1000 pcs.
part no.	12.89191


Dimensions (mm):

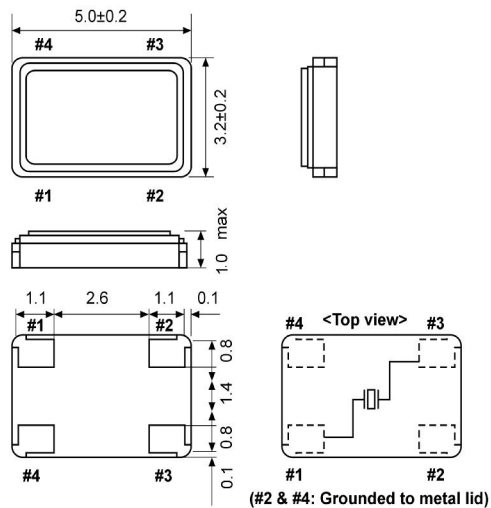

Suggested soldering pad:



Reflow soldering condition:

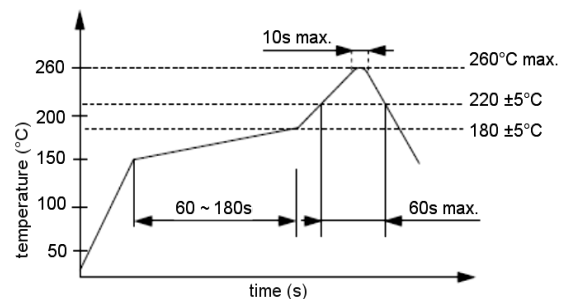

Tape specification:

