

1520955

https://www.phoenixcontact.com/us/products/1520955

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector housing, Crimp contacts

Commercial data

Item number	1520955
Packing unit	50 pc
•	<u> </u>
Minimum order quantity	50 pc
Sales key	BF72
Product key	BF2IEA
GTIN	4063151984281
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	8.7 g
Country of origin	MX



https://www.phoenixcontact.com/us/products/1520955



Technical data

Notes

General	AT04-6P-BLK
General	Use with Size 16 pin contacts
Trade restriction	

Product properties

Product type	Contact insert
Series	AT04
Contact numbering	1 - 6
Shielded	no
Data management status	

00

Electrical properties

Article revision

Specific dielectric strength	1500 V AC (Less than 2 mA current leakage)
Insulation resistance	1000 MΩ (at 25 °C)

Connection data

Connection method	Crimp contacts
-------------------	----------------

Dimensions

Dimensional drawing	21.1
Width	21.1 mm
Height	24.3 mm
Length	46.2 mm

Material specifications

Seal material Profile gasket	Silicon
Seal material Cable seal	Silicon
Housing material	PA-GF

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100



1520955

https://www.phoenixcontact.com/us/products/1520955

Characteristics

Specific dielectric strength 1500 V AC (Less than 2 mA current leakage)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP68 (in mated condition)
	IP69K (in mated condition)
Ambient temperature (operation)	-55 °C 125 °C




https://www.phoenixcontact.com/us/products/1520955



Drawings


Schematic diagram

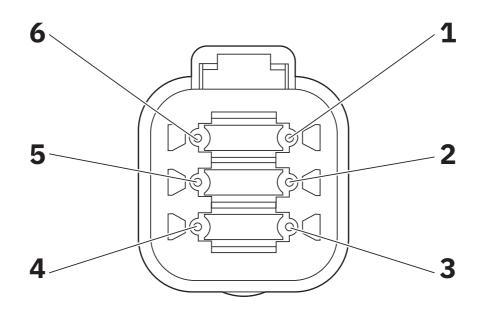

AT04-6P pin assignment

Dimensional drawing





AT04-6P top view and side view



1520955

https://www.phoenixcontact.com/us/products/1520955

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116



1520955

https://www.phoenixcontact.com/us/products/1520955

Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1520955

https://www.phoenixcontact.com/us/products/1520955

Accessories

CC-AT60-S16-R14-NI - Crimp contact

1519754

https://www.phoenixcontact.com/us/products/1519754



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: nickel-plated, connection cross section: $2.5 \text{ mm}^2 \dots 2.5 \text{ mm}^2$, AWG 14 ... 14

CC-AT60-S16-R16/20-AU - Crimp contact

1519755

https://www.phoenixcontact.com/us/products/1519755



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: $0.5~\text{mm}^2$... $1.5~\text{mm}^2$, AWG 20 ... 16



1520955

https://www.phoenixcontact.com/us/products/1520955

CC-AT60-S16-R16/20-NI - Crimp contact

1519756

https://www.phoenixcontact.com/us/products/1519756



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: nickel-plated, connection cross section: $0.5 \text{ mm}^2 \dots 1.5 \text{ mm}^2$, AWG 20 ... 16

IV-AW6P - Terminal position assurance

1521031

https://www.phoenixcontact.com/us/products/1521031

Terminal position assurance, number of positions: 6, material: PA-GF





1520955

https://www.phoenixcontact.com/us/products/1520955

IV-SP16 - Filler plug

1521037

https://www.phoenixcontact.com/us/products/1521037



Filler plug

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com