

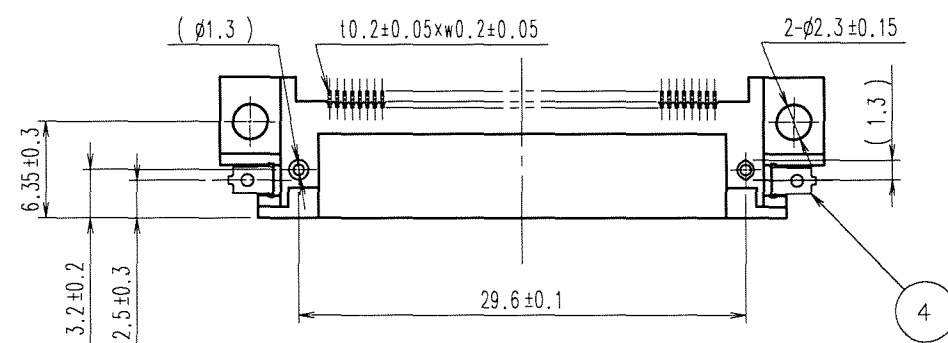
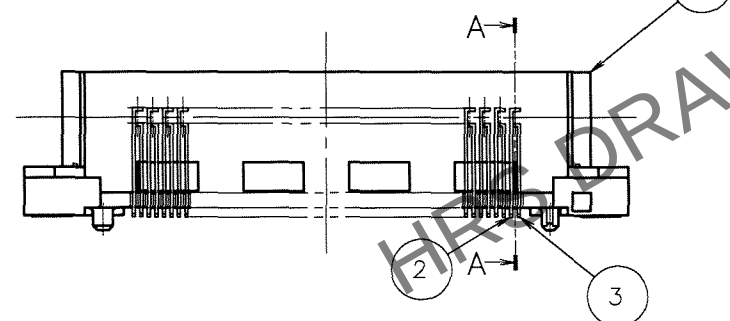
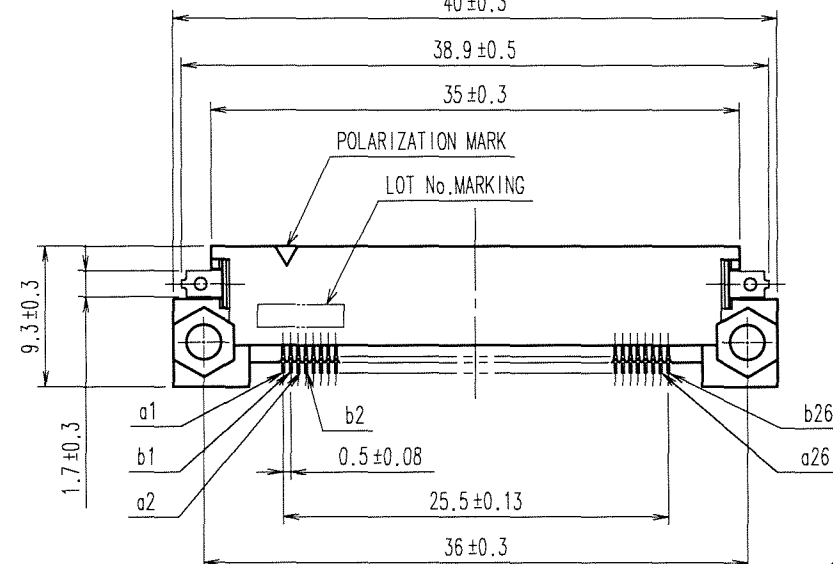
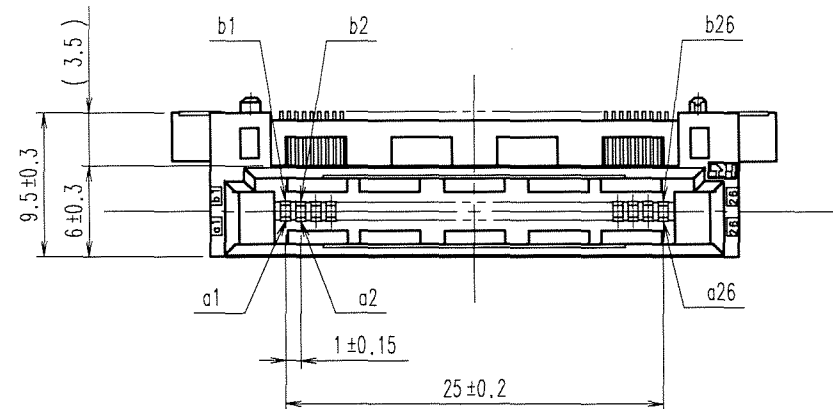
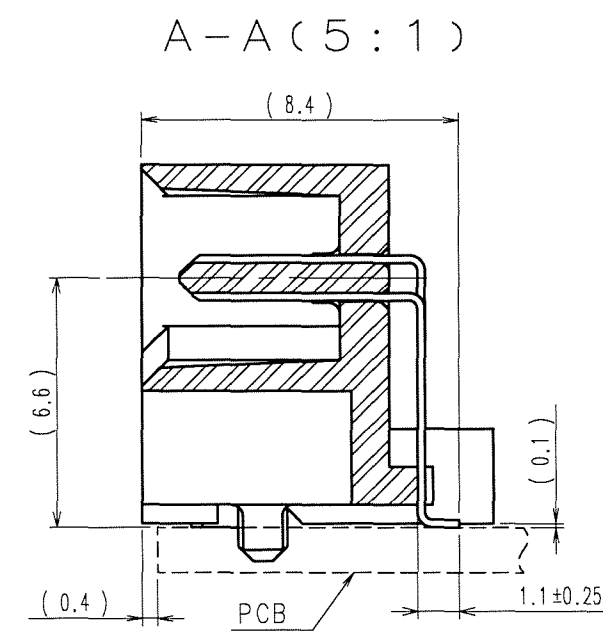



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

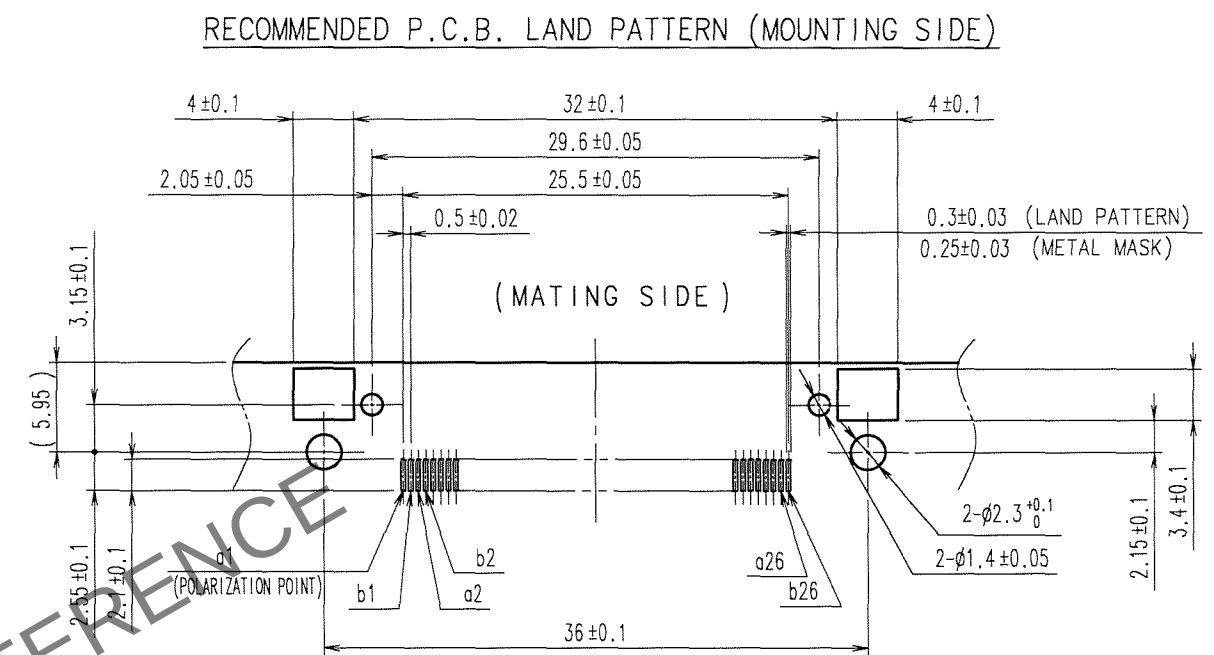

NOTE 1 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS TO BE 0.1 MAX.
2 NOTE THAT THE REFERENCE TIGHTENING TORQUE IS 0.15 N · m.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

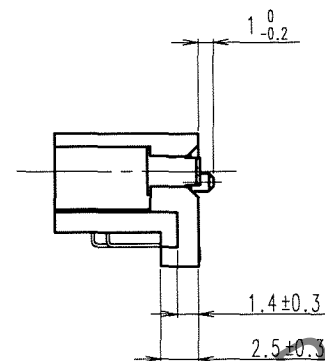

4	BRASS	TIN-PLATING	2, 3	BRASS	CONTACT AREA : GOLD 0.1μm min.								
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA : TIN-PLATING 1μm min.								
					UNDER PLATING : NICKEL 1μm min.								
NO.		MATERIAL		FINISH, REMARKS									
CODE NO. (OLD)		CL		DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
				K.DOI '06.09.30		K. Doi '06.09.30		K. Ogawa '06.10.04		H. Okawa '06.10.04			
		DRAWING NO.				PART NO.							
SCALE		EDC3-151389-21				FX5-52P-SH3(71)							
2 : 1		 HIROSE ELECTRIC CO., LTD.				CODE NO.						1/1	
UNITS						CL575-0046-5-71							
mm													