




RFID read/write head HF

DTRHF IBRWIDUS03

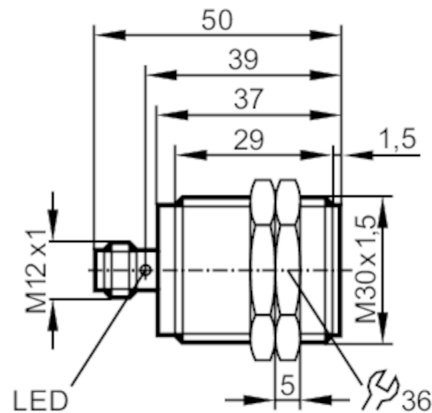

Application

Application	detection of objects on transport equipment
Radio approval for	USA; Canada; EU/RED; Australia; Japan; China; Taiwan; India; Singapore; Ukraine; South Korea
Note on radio approval	The list of countries applying the European Radio Equipment Directive 2014/53/EU (RED) can be found under “Downloads”.

Electrical data

Operating voltage	[V]	19.2...28.8 DC; (supply only via the DTE10x evaluation unit (to EN 60950-1))
Current consumption	[mA]	< 50
Protection class		III
Operating frequency	[MHz]	13,56
RFID standard		ISO 15693

Detection zone

Distance write/read head front [mm]	100		
Distance write/read head side [mm]	50		
Distance to the ID tag [mm]	referred to 30 mm coin tag; I-CODE SLI	:	≤ 30

Interfaces

Communication interface	DATA / DTE10x
-------------------------	---------------

Operating conditions

Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...80
Protection		IP 67; IP 69K

Tests / approvals

Shock resistance	EN 60068-2-27	50 g 11 ms / 40 g (6 ms, continuous)
Vibration resistance	EN 60068-2-6	20 g 10...2000 Hz

Mechanical data

Weight	[g]	187.5
--------	-----	-------

ANT430



RFID read/write head HF

DTRHF IBRWIDUS03

Housing	cylindrical
Mounting	flush mountable
Dimensions [mm]	M30 x 1.5 / L = 50
Thread designation	M30 x 1.5
Materials	housing: stainless steel; Protective cover: PPS

Displays / operating elements

Display	operation	1 x LED, green
	tag communication	1 x LED, yellow

Accessories


Items supplied	nut 2 x M30 x 1,5
----------------	-------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A



Connection

