



RoHS

MAPX



MODIFICATION

DRW

DATE

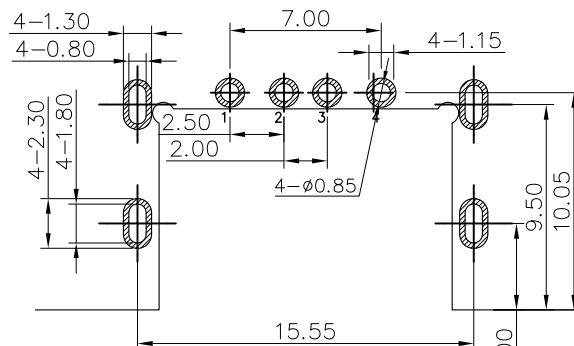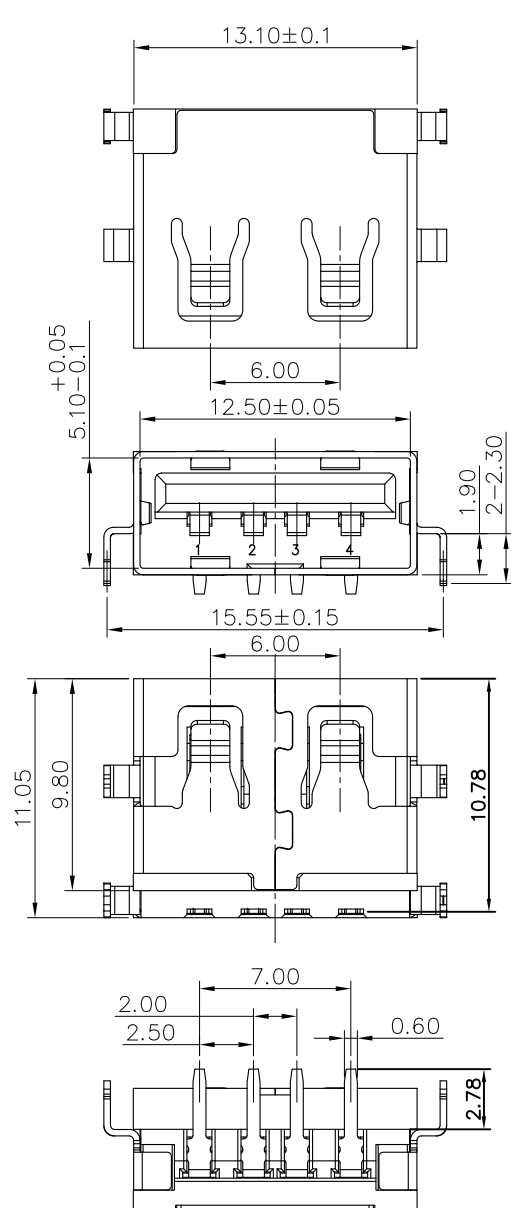

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)

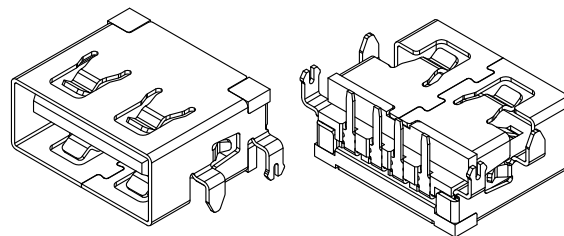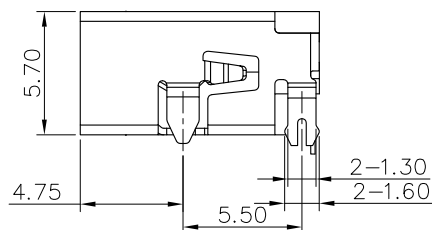

NOTES:

1. MATERIAL

CONTACTS: COPPER ALLOY (T=0.20mm)

SHELL: SPCC OR COPPER (T=0.30mm)

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.

2. ELECTRICAL PERFORMANCE,

CONTACT RESISTANCE: $30m\Omega$ MAX

CONTACT CURRENT RATING: 1.5 AMPERES

DIELECTRIC WITHSTAND VOLTAGE, 500V R.M.S

INSULATION RESISTANCE: $100M\Omega$ MIN

OPERATING TEMPERATURE: $-40^{\circ}C \sim +85^{\circ}C$.

3. MECHANICAL PERFORMANCE,

INSERTION FORCE: 3.5kgf Max

REMOVAL FORCE: 1.02kgf Min

DURABILITY: 5000 CYCLES.

4. PLATING SPECIFICATION:

CONTACTS: GOLD PLATED ON CONTACT AREA, Sn ON SOLDER AREA,
NICKEL UNDERPLATED.

SHELL: 80μ MIN BRIGHT NICKEL PLATING OVER ALL,
NICKEL MUST BE SOLDABILITY.

HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0 .

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.25	X.	$\pm 5^{\circ}$
.X	± 0.20	.X	$\pm 2^{\circ}$
.XX	± 0.15	.XX	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位	MM	制图	尹先华	制图料号	905-761A2022D10201
比例	1:1	审核	郭治富	产品名称	AF90度11.0沉板1.9四脚插板无边铁壳LCP黑色
日期	2021-04-12	核准	黄国荣	角法	版本
DATE		APPD		VIEW	VER



版本

A0

RoHS

MAPX


MODIFICATION

DRW

DATE


一.
將成品依同一方向放入真空盤內,如圖所示.

At same direction, put product onto the tray. Direction refers to below drawing.

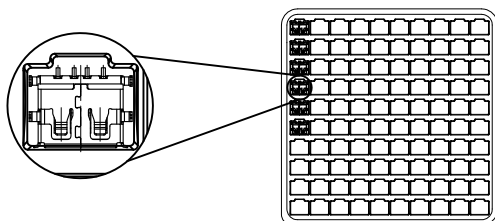

VIEW-1

- 二.
- 1) 一只紙箱可放置之包裝盤(包括上蓋)見下表.
1) trays per carton, please see next table.
 - 2) 最上面一個真空盤作為上蓋,故不放置成品.貼上標籤.
2) Put cover on the top tray to protect product. Sticking Show.
 - 3) 每1個紙箱用的包裝數量詳見下表。
3) The Q'ty of products per carton please see next tabel.

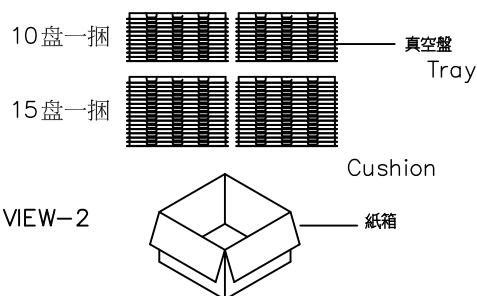

VIEW-2

- 4) 將裝滿成品的真空盤用 PE帶捆緊後放在塑膠袋內,裝完後再封箱。
- 4) Bind the trays with PE tape and then, put them into the poly bag. Seal the carton with tape.

三.

- 1) 將標籤貼於紙箱側麥上方.
Stick the needful label On the up-right corner of the side of carton.

標籤黏貼處
Location of
Sticking lable

ITEM NO.
Q'TY:
N.W.:
G.W.:

PCS.
KGS.
KGS.

標籤黏貼處
Location of
Sticking lable

正面

VIEW-3

備 註(REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿
The unfilling-carton must be filled with assuagement.
2. 裝滿成品后之外箱,最大堆積箱數:5箱
About the box fully filled with products, the MAX accumulating quantity of boxes is 5.
3. 如須貼Bar-code,請依Bar-code作業辦法執行
If barcode lable is required, do it according to the related barcode lable operation standards.

包裝明細表 (The detail of the packing) Carton

包裝容量 (Packing Capacity)			重量 Weight (Kg)		
pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
100	50	5000			

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	905-761A2022D10201
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度11.0沉板1.9四脚插板无边铁壳LCP黑色
日期 DATE	2021-04-12	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0