


**KEMET Part Number: PME264NC5330MR30**  
(P264CP333M660A)

PME264/P264, Film, Metallized Paper, Safety, 0.033 uF, 20%, 660 VAC (X2), 1500 VDC, 85°C, Lead Spacing = 20.3mm

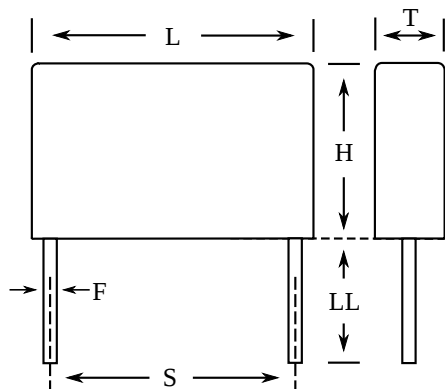

**General Information**

|                        |                  |
|------------------------|------------------|
| <b>Series:</b>         | PME264/P264      |
| <b>Dielectric:</b>     | Metallized Paper |
| <b>Style:</b>          | Radial           |
| <b>Features:</b>       | EMI Safety       |
| <b>RoHS:</b>           | Yes              |
| <b>Lead:</b>           | Wire Leads       |
| <b>Qualifications:</b> | ENEC, UL, cUL    |
| <b>AEC-Q200:</b>       | No               |
| <b>Construction:</b>   | Molded           |

**Dimensions**

|           |                 |
|-----------|-----------------|
| <b>L</b>  | 24mm MAX        |
| <b>H</b>  | 16.5mm MAX      |
| <b>T</b>  | 11.3mm MAX      |
| <b>S</b>  | 20.3mm +/-0.4mm |
| <b>LL</b> | 30mm +5mm       |
| <b>F</b>  | 0.8mm NOM       |

**Packaging Specifications**

|                            |           |
|----------------------------|-----------|
| <b>Packaging:</b>          | Bulk, Bag |
| <b>Packaging Quantity:</b> | 150       |

**Specifications**

|                               |              |
|-------------------------------|--------------|
| <b>Capacitance:</b>           | 0.033 uF     |
| <b>Capacitance Tolerance:</b> | 20%          |
| <b>Voltage AC:</b>            | 660 VAC (X2) |
| <b>Voltage DC:</b>            | 1500 VDC     |
| <b>Temperature Range:</b>     | -40/+85°C    |
| <b>Rated Temperature:</b>     | 85°C         |
| <b>Dissipation Factor:</b>    | 1.30% 1kHz   |
| <b>Insulation Resistance:</b> | 12 GOhms     |
| <b>Max dV/dt:</b>             | 1000 V/us    |
| <b>Safety Class:</b>          | X2           |