


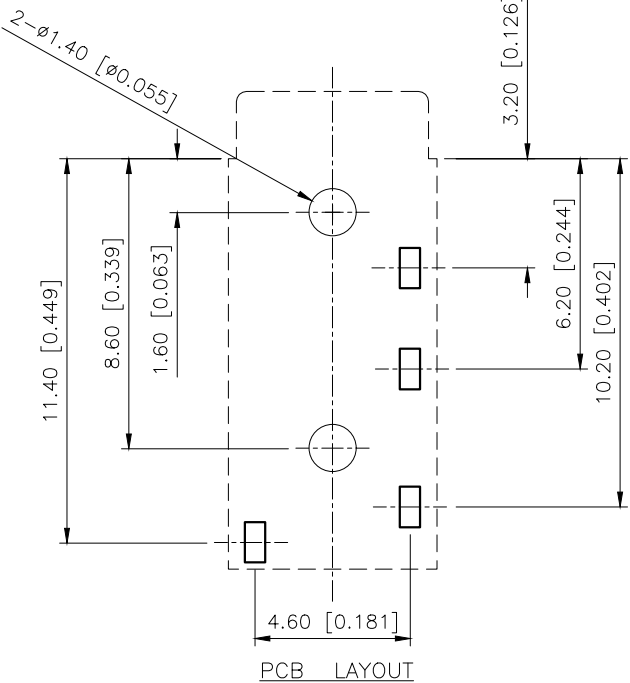
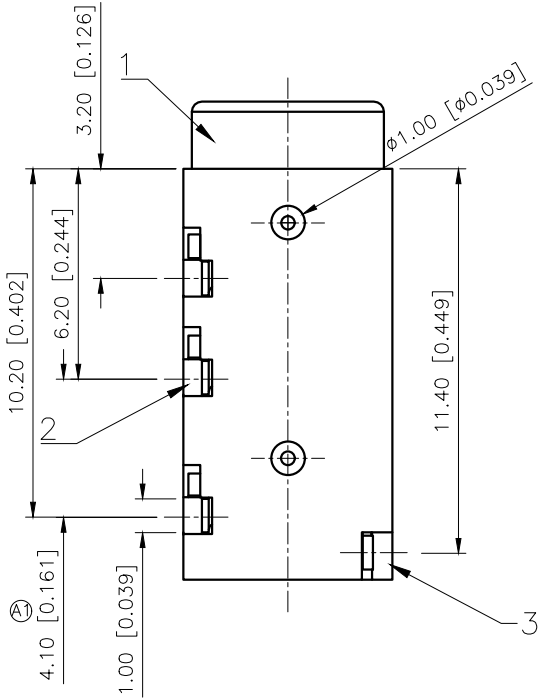


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X5	产品尺寸及外观变更, 图面升级整理图面	2025.03.03	阿树

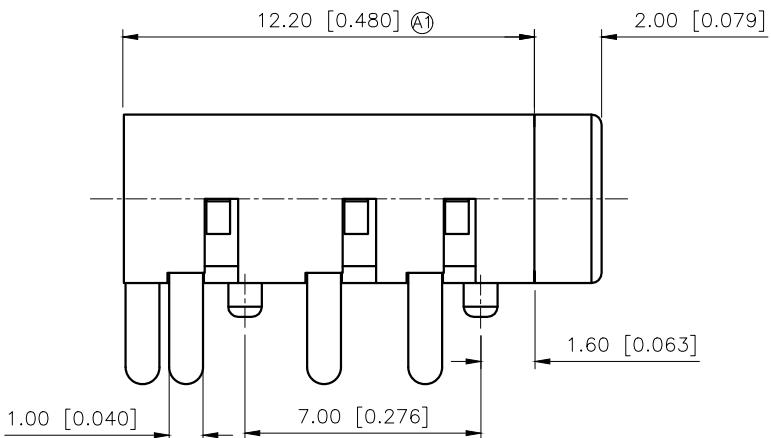

Specifications(规格):
1.Rated electrical load(额定电压): 30V 0.5A
2.Contact resistance(接触电阻): ≤30mΩ Max
3.Insulation resistance(绝缘电阻): ≥100MΩ Min
4.Withstanding voltage(耐压值): ≥500V AC/minute
5.Insertion and extraction force(插拔力): 3~20N
6.Mating cycles(使用寿命): 5000 cycles Min

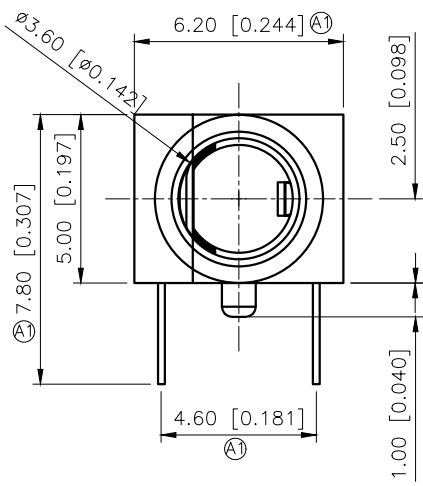

3	Contact piece 1	1	QSn6.5-0.1 Tin bronze band δ=0.20mm	Tin-Plated
2	Reeds 3	1	QSn6.5-0.1 Tin bronze band δ=0.20mm	Tin-Plated
1	Pedestal 1	1	PA	Black
NO	NAME	QTY	MATERIAL	Remark

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	3.5 PHONE JACK
APPROVED		SIZE: A4	PART NO.: PJ-320A
		DWG NO.:	