

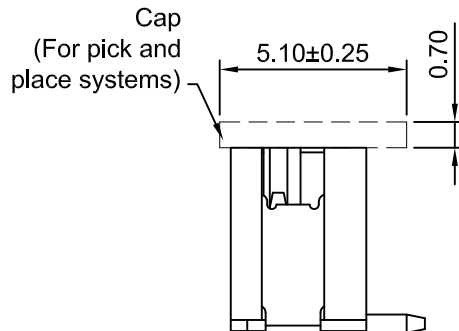
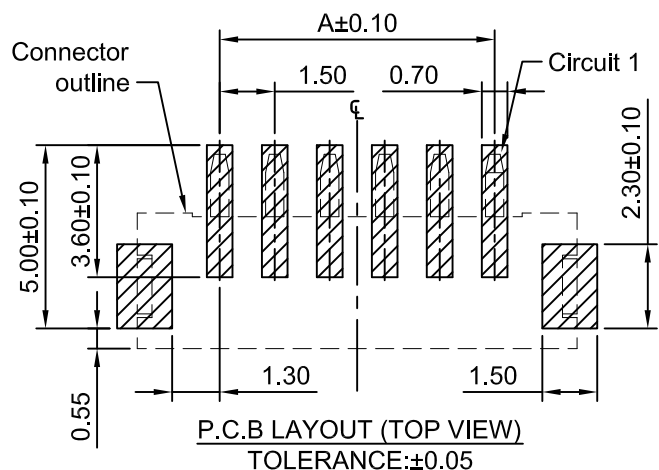
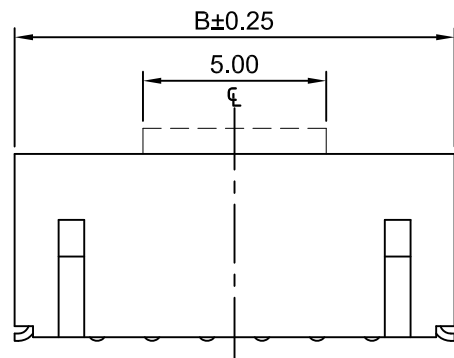


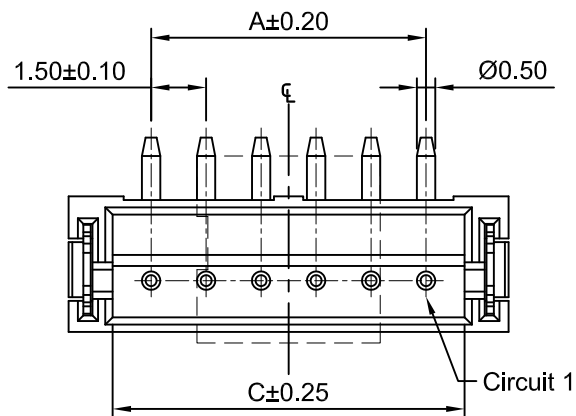

WITH CAP

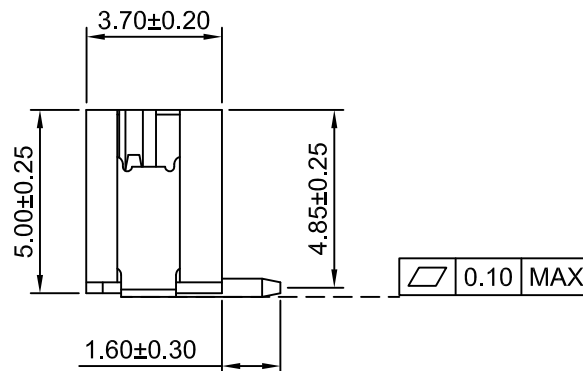

Ordering Information:

A1501WV-S-XP-LCP - ***
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u"Mating area)

G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Salt spray:24 Hours

Pin Material: Brass

Solder Tabs: Phosphor Bronze/Tin over Nickel

Wafer: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501WV-S-2P-LCP	1.50	6.00	3.60
A1501WV-S-3P-LCP	3.00	7.50	5.10
A1501WV-S-4P-LCP	4.50	9.00	6.60
A1501WV-S-5P-LCP	6.00	10.50	8.10
A1501WV-S-6P-LCP	7.50	12.00	9.60
A1501WV-S-7P-LCP	9.00	13.50	11.10
A1501WV-S-8P-LCP	10.50	15.00	12.60
A1501WV-S-9P-LCP	12.00	16.50	14.10
A1501WV-S-10P-LCP	13.50	18.00	15.60
A1501WV-S-11P-LCP	15.00	19.50	17.10
A1501WV-S-12P-LCP	16.50	21.00	18.60
A1501WV-S-13P-LCP	18.00	22.50	20.10
A1501WV-S-14P-LCP	19.50	24.00	21.60
A1501WV-S-15P-LCP	21.00	25.50	23.10
A1501WV-S-16P-LCP	22.50	27.00	24.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2021.03.15
A4	CHANGE THE DRAWING	2019.08.06
A3	ADD THE SALT SPRAY	2019.04.01
A2	CHANGE THE CURRENT RATING	2019.02.18
A1	MODIFY THE MATERIAL	2016.04.05
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR		1.50mm PITCH VERTICAL WAFER - SMD TYPE	
Dengchun Yi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
				DRAWING NO.			
				A1501WV-S-XP-LCP			
				REV A5			