
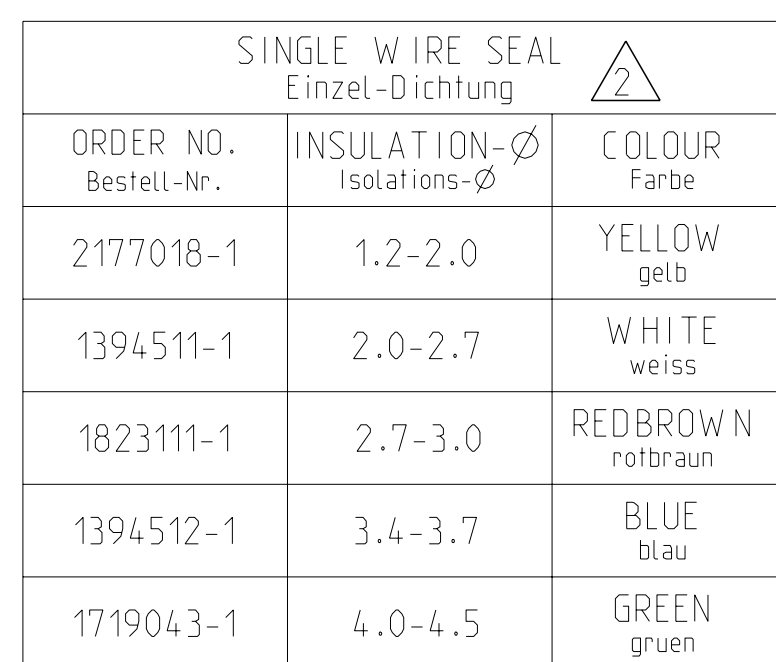
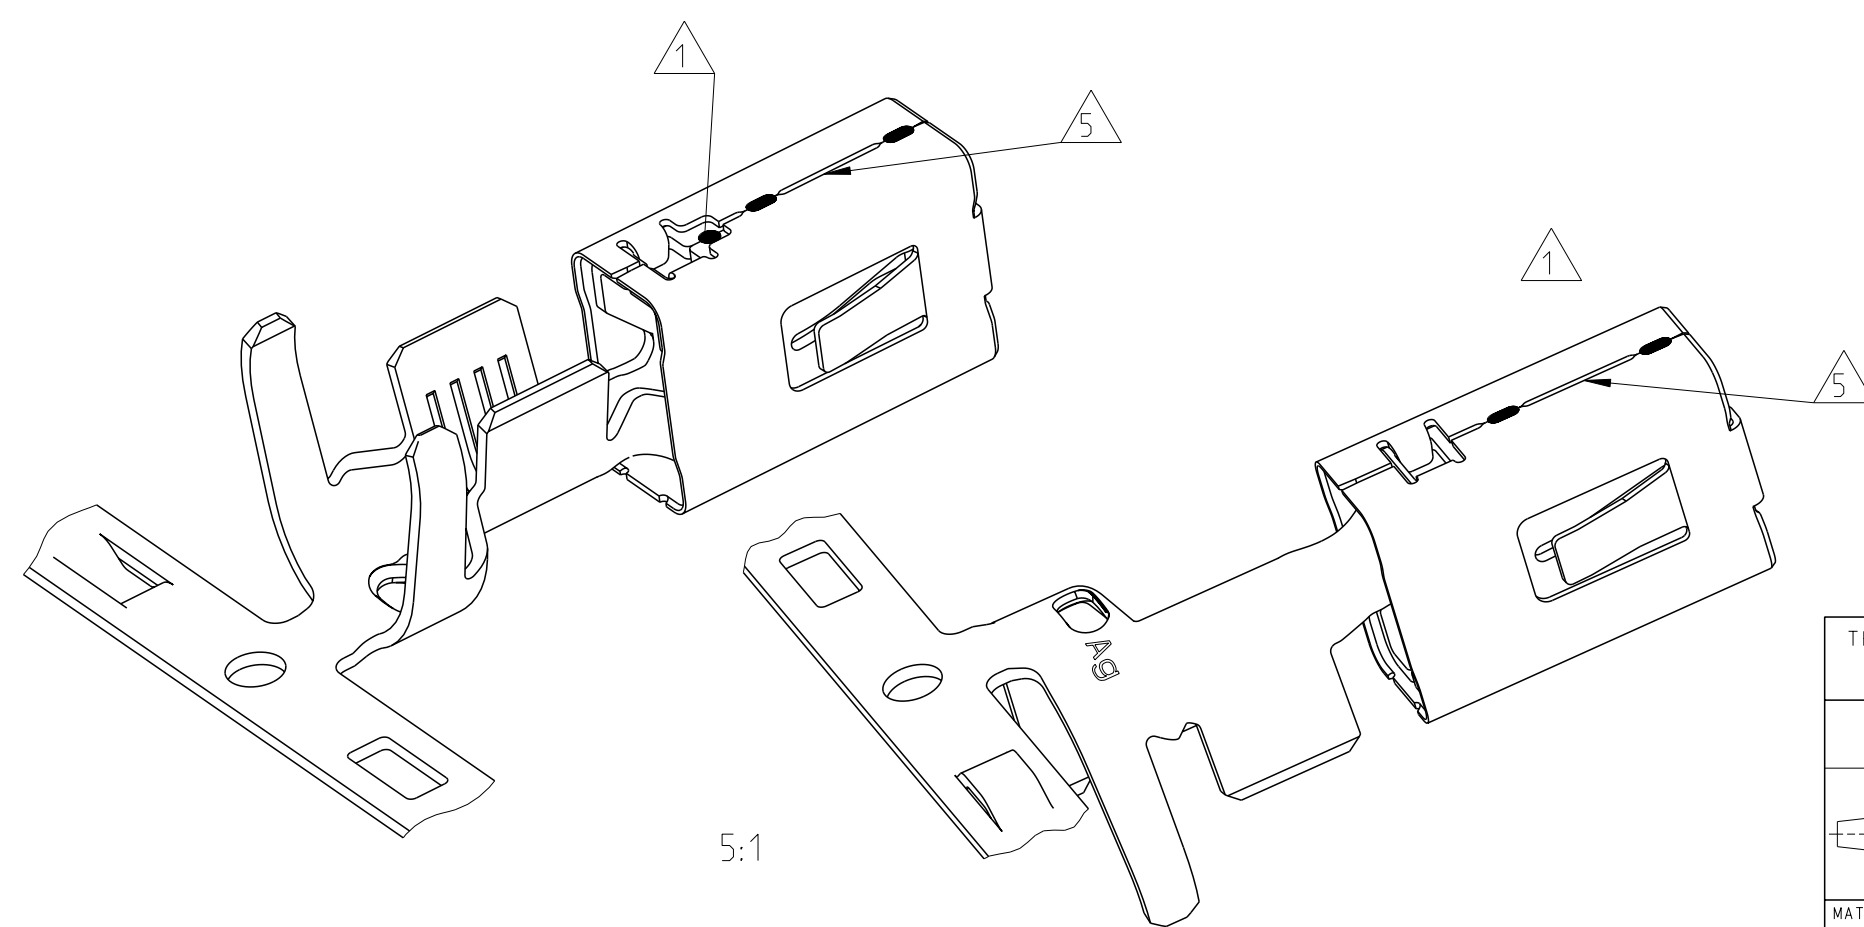
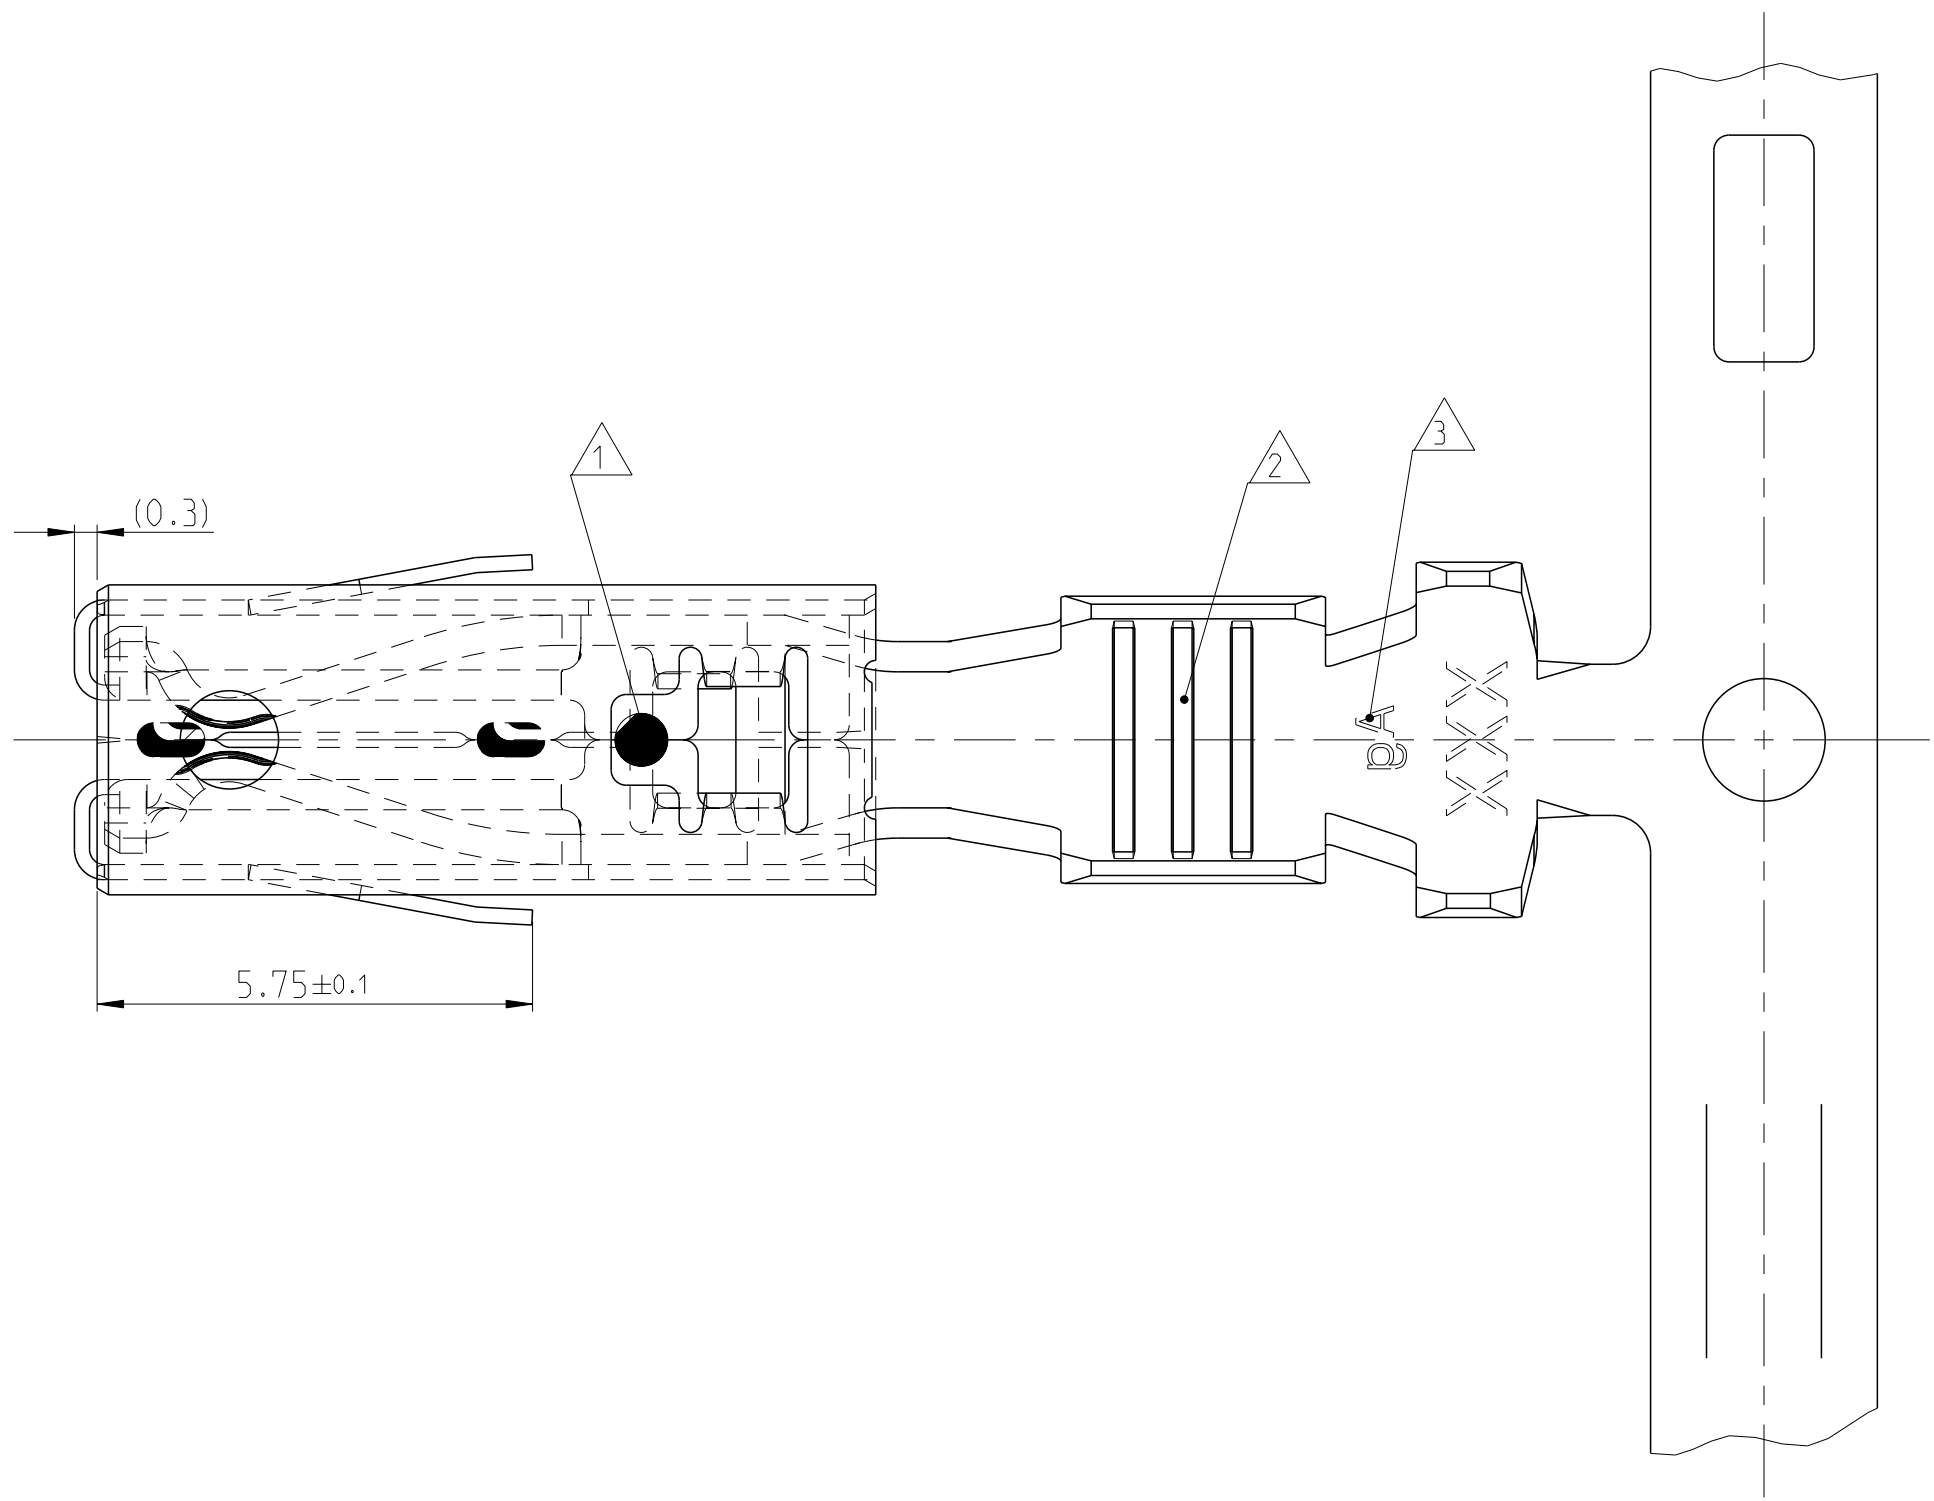
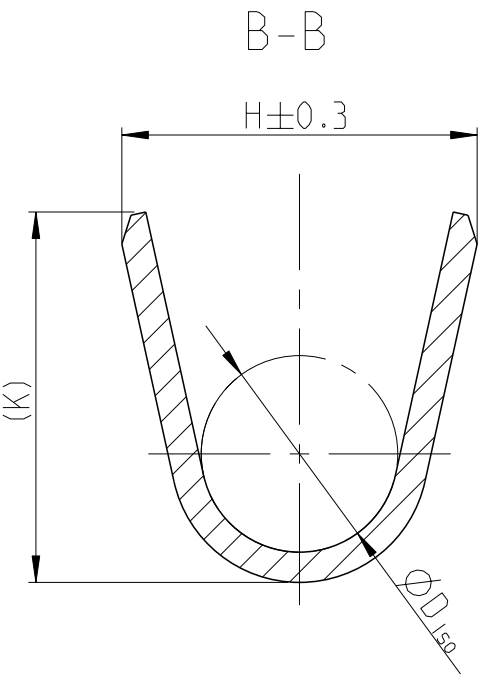
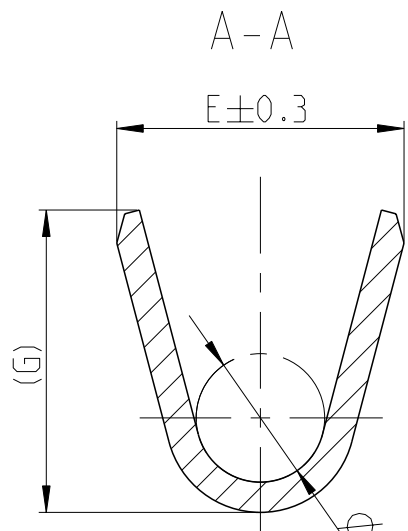
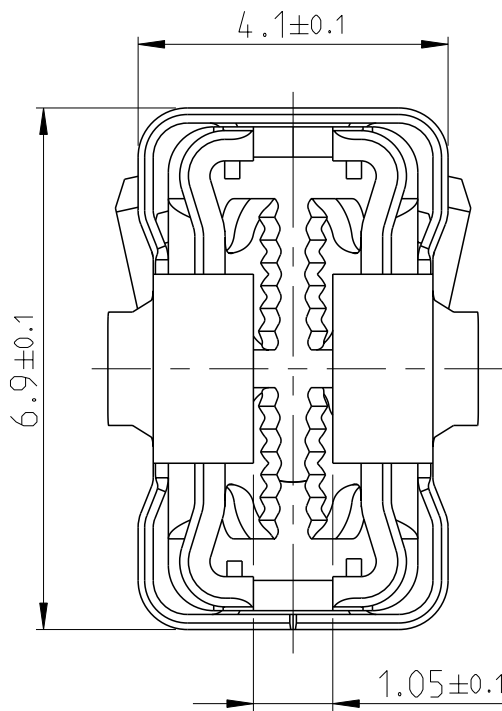


2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. 03DEC2001 R. Meier CHK. R. Schaefer 03DEC2001 APVD. M. Bleicher 28OCT2011		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		NAME AMP MCP6.3/4.8K FLATCONTACT AMP MCP6.3/4.8K Flachkontakt PRODUCT GROUP DRAWING	
				SIZE CAGE CODE DRAWING NO. A1 00779 C=124 1438	
MATERIAL -		FINISH -		RESTRICTED TO -	
		WEIGHT -		SCALE 5:1 SHEET 1 of 2 REV. 1	
Customer Drawing					


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
A1	-			SEE SHEET 1			

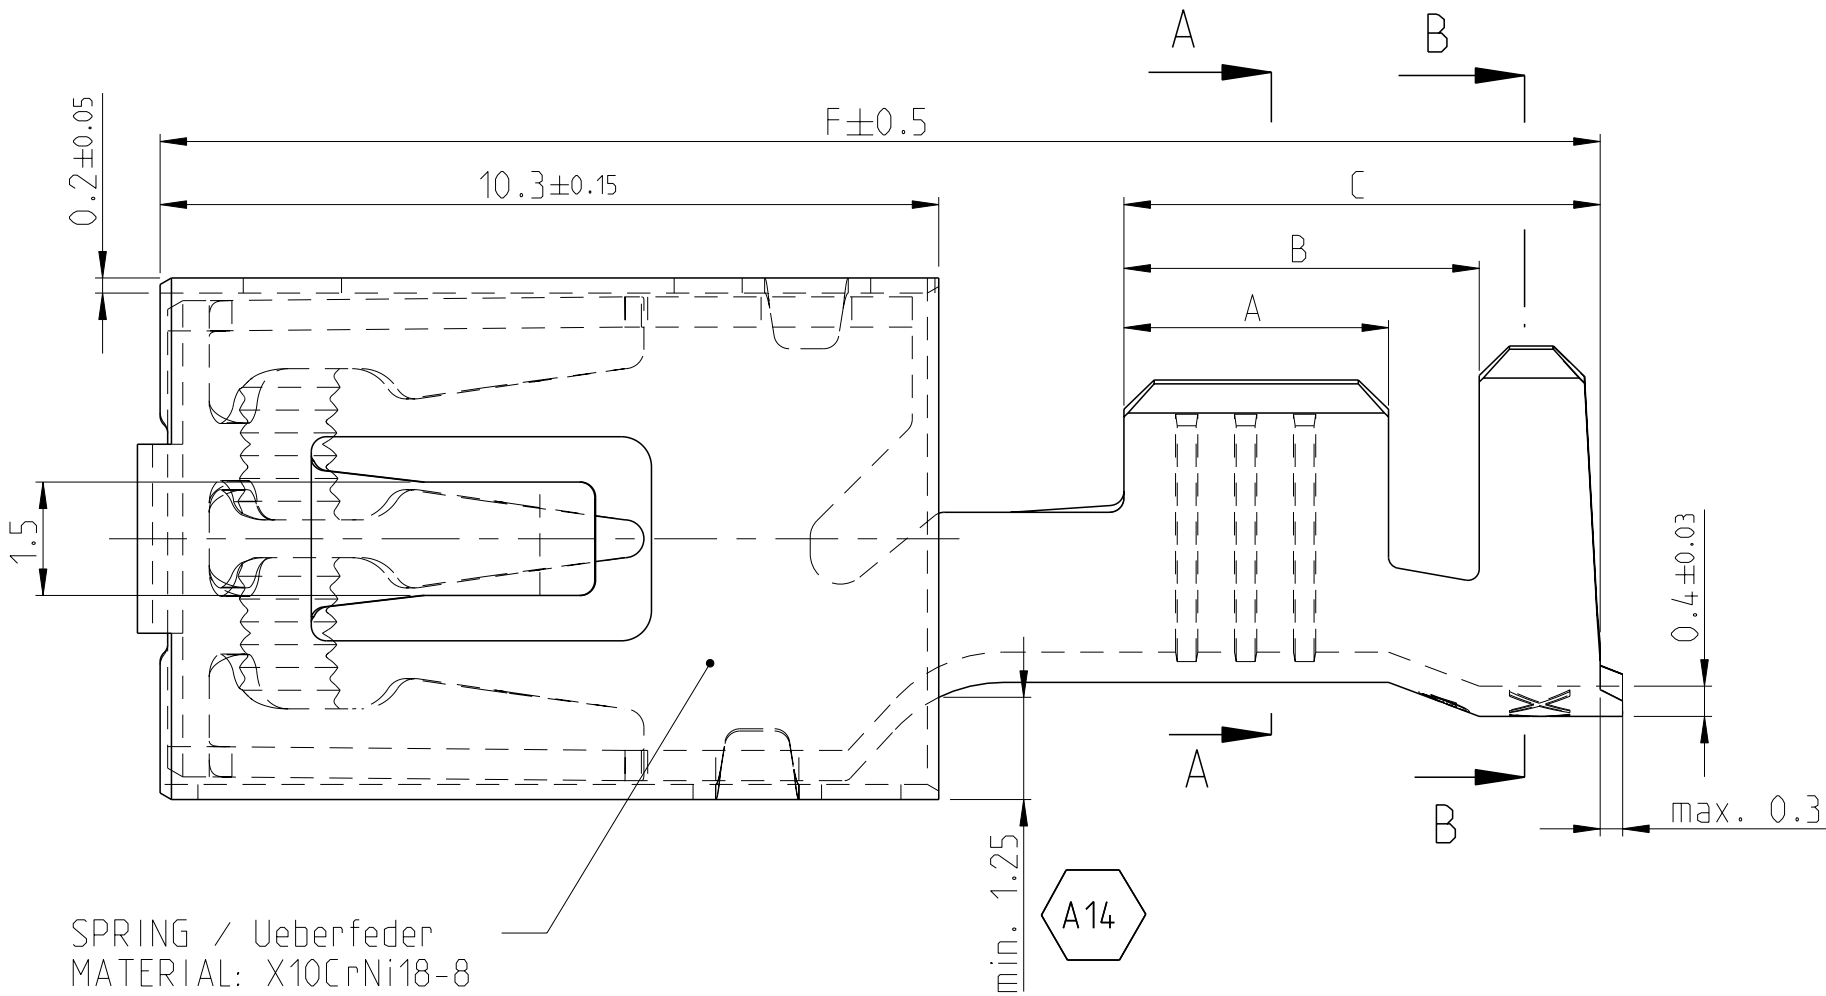

NOTES

Bemerkungen

- 1 LASERWELDED
Lasergeschweisst
- 2 DIFFERENT FORM AND NUMBER OF THE SERRATIONS POSSIBLE
Unterschiedliche Ausführung und Anzahl der Rillen moeglich
- 3 SILVER PLATED VERSIONS ARE MARKED WITH "Ag"
Versilberte Versionen sind mit "Ag" gekennzeichnet
- 4 DIFFERENT ASSEMBLY CAUSED BY PRODUCTION OF THE SPRING ON THE BODY.
SPOTWELDS CAN BE ABOVE OR DOWN.
Fertigungsbedingte unterschiedliche Montage der Ueberfeder auf dem Body moeglich.
Der Stoss kann sich oben oder unten befinden.
- 5 USED WITH MEDIUM FUSE 0.64±0.04mm x 5.25 ±0.15mm
(COMPLIANT WITH ATO[®] FUSE TECHNOLOGY)
ATO[®] IS A REGISTERED TRADE MARK OF LITTELFUSE INC.
Verwendet mit Medium Sicherung 0.64±0.04mm x 5.25 ±0.15mm
(kompatibel mit ATO[®]-fuse Technologie)
ATO[®] ist ein eingetragener Markenname von Littelfuse Inc.

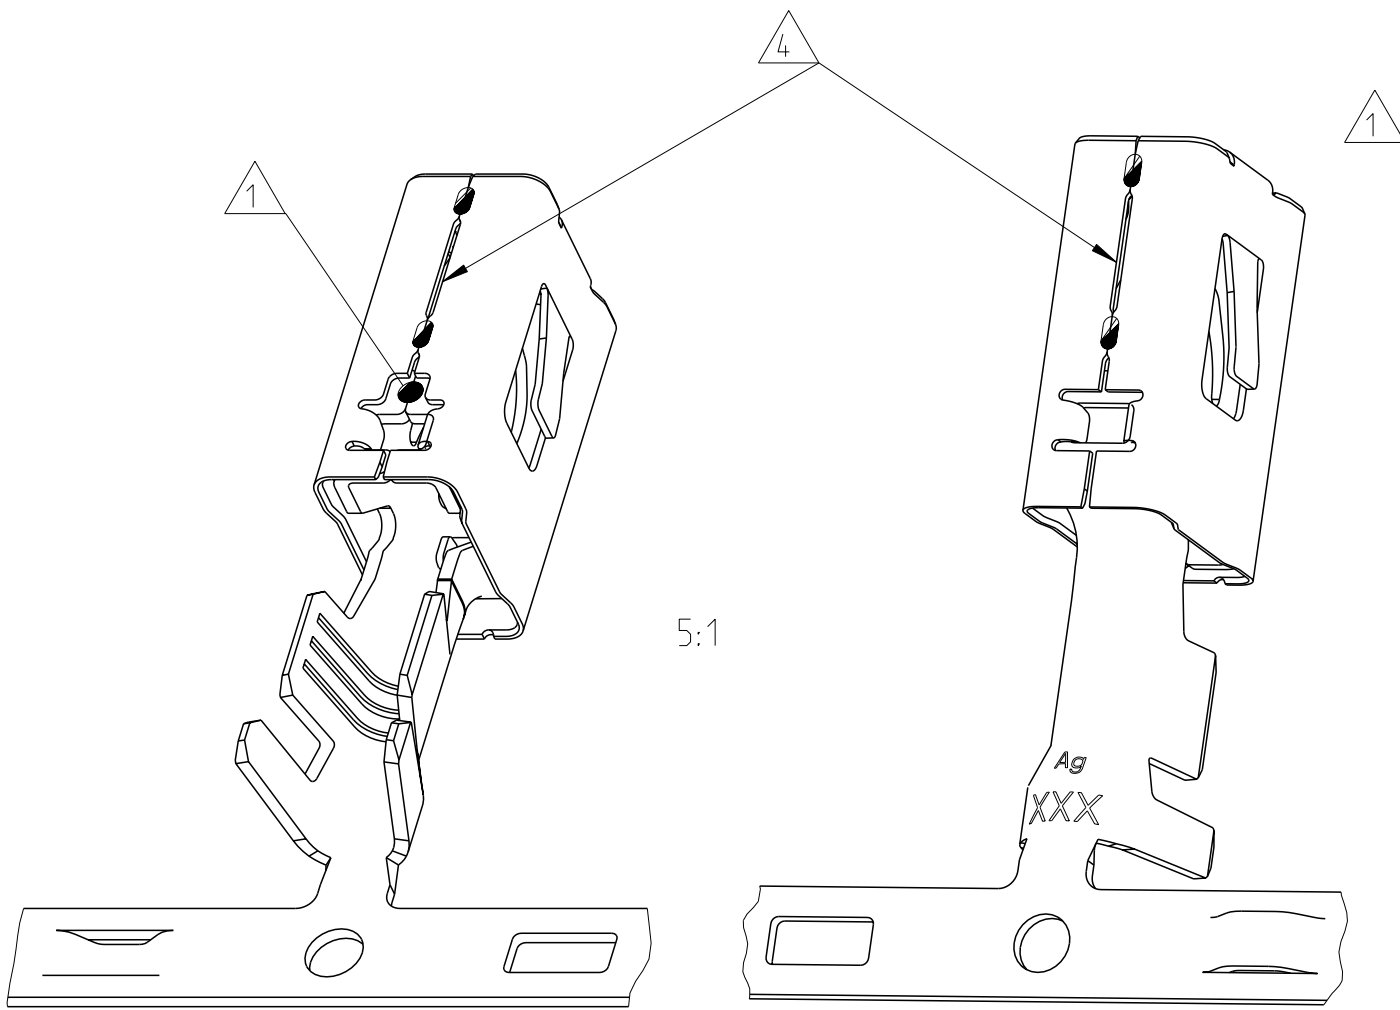

1-2177995-3	A	>4.0-6.0	4.0-4.3	CuNiSi	SILVER PLATED versilbert	4.5	6.0	7.8	19.95	E = 5.3 G = 5.6 D _{Dr} = 2.9	H = 6.7 K = 7.0 D _{Iso} = 3.9
-	-				-						
1-2208461-3	A	>2.5-4.0	3.3-4.5	CuNiSi	SILVER PLATED versilbert	4.0	5.2	6.8	19.05	E = 4.6 G = 4.8 D _{Dr} = 2.4	H = 6.4 K = 6.7 D _{Iso} = 4.0
-	-				-						
1-2208460-3	A	>1.0-2.5	2.2-3.0	CuNiSi	SILVER PLATED versilbert	3.5	4.7	6.3	19.05	E = 3.8 G = 4.0 D _{Dr} = 1.7	H = 4.7 K = 4.9 D _{Iso} = 2.6
-	-				-						
1-2208459-3	A	0.5-1.0	1.4-2.1	CuNiSi	SILVER PLATED versilbert	3.0	4.2	5.8	19.05	E = 2.8 G = 3.0 D _{Dr} = 1.1	H = 3.8 K = 4.1 D _{Iso} = 1.8
-	-				-						
ORDER NO. STRIP Bestell-Nr. Bandware	Rev.	WIRE RANGE Drahtgroessen Bereich (mm ²)	INSULATION- Ø Isolations- Ø (mm)	MATERIAL Werkstoff	SURFACE IN CONTACT AREA Oberflaeche im Kontaktbereich	A	B	C	F	WIRE CRIMP Drahtcrimp	INSULATION CRIMP Isolations Crimp
CRIMP DIMENSION Crimpabmessungen (mm)											

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.Kirschbaum 12DEC2013	 TE Connectivity			
DIMENSIONS: mm		CHK A.Mairrosen 13DEC2013				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 1-PLC 2-PLC 3-PLC 4-PLC ANGLES FINISH	±0.2 ±0.2 ±0.2 ±0.2 ±1° -	NAME			
			AMP MCP6.3/4.8K FLATCONTACT AMP MCP6.3/4.8K Flachkontakt PRODUCT GROUP DRAWING			
			APVD C.Goepfel 13DEC2013			
			PRODUCT SPEC 108-94427			
			APPLICATION SPEC 116-10388			
MATERIAL		WEIGHT	SIZE A1	CAGE CODE 00779	DRAWING NO 1241438	RESTRICTED TO
-	-	-				-
Customer Drawing			SCALE	10:1	SHEET 2 OF 2	REV. A14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1241406-3 \(Mouser Reel\)](#) [1241406-3 \(Cut Strip\)](#) [1241406-3 \(Loose Piece\)](#)