




N-Channel 30-V (D-S), 175°C MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
30	0.004	75 ^a


175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs

TO-220AB

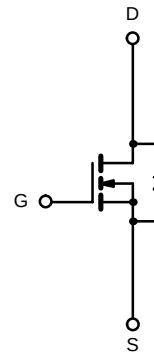
Top View
SUP75N03-04

DRAIN connected to TAB

TO-263

Top View
SUB75N03-04

DRAIN connected to TAB



N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Limit	Unit
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	$T_C = 25^\circ\text{C}$	I_D	75 ^a	A
	$T_C = 125^\circ\text{C}$		75 ^a	
Pulsed Drain Current		I_{DM}	250	
Continuous Source Current (Diode Conduction)		I_S	75	
Avalanche Current		I_{AR}	75	mJ
Avalanche Energy	$L = 0.1\text{ mH}$	E_{AS}	280	
Repetitive Avalanche Energy ^b	$L = 0.05\text{ mH}$	E_{AR}	140	
Maximum Power Dissipation	$T_C = 25^\circ\text{C}$ (TO-220AB and TO-263)	P_D	187 ^c	W
	$T_A = 25^\circ\text{C}$ (TO-263) ^d		3.7	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 175	$^\circ\text{C}$
Lead Temperature ($1/16"$ from case for 10 sec.)	TO-220AB	T_L	300	

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) ^d	R_{thJA}	40	$^\circ\text{C/W}$
	Free Air (TO-220AB)		62.5	
Junction-to-Case		R_{thJC}	0.6	

Notes

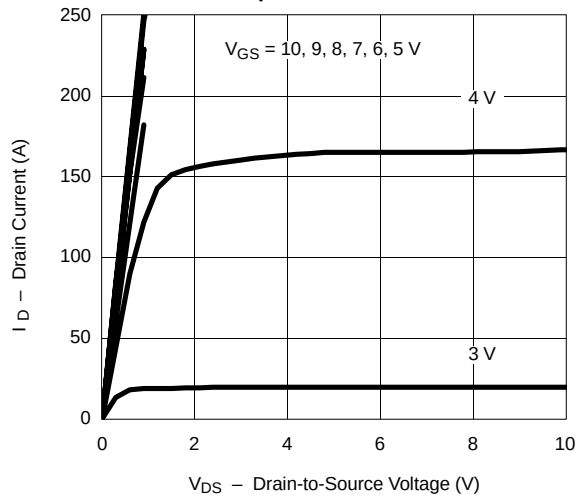
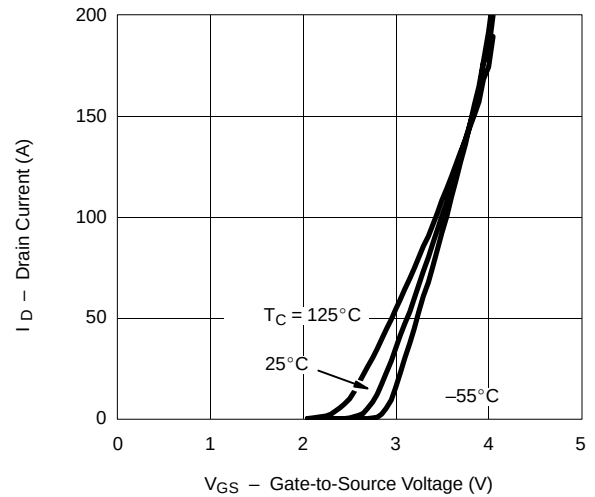
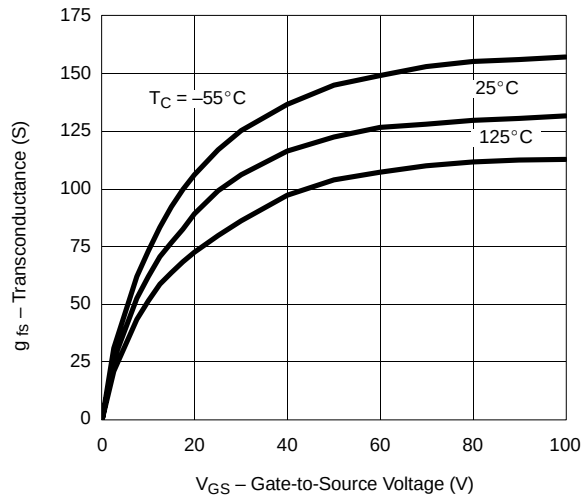
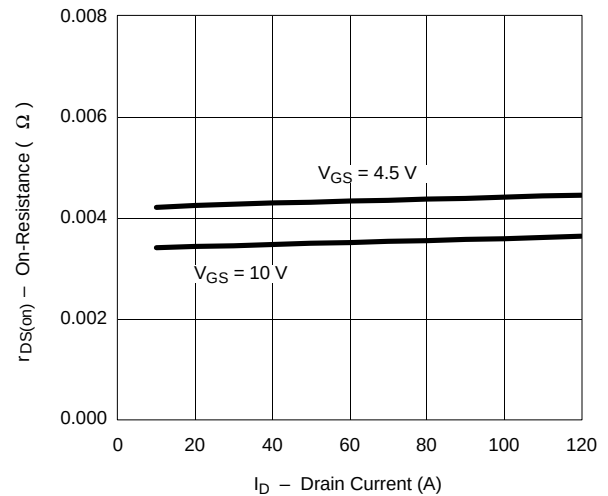
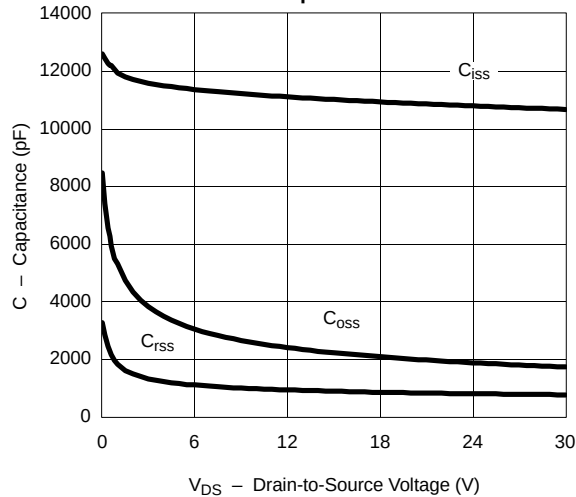
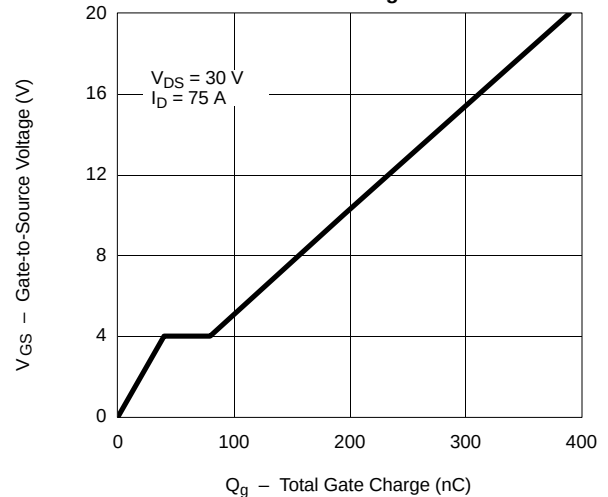
- Package limited.
- Duty cycle $\leq 1\%$.
- See SOA curve for voltage derating.
- When mounted on 1" square PCB (FR-4 material).

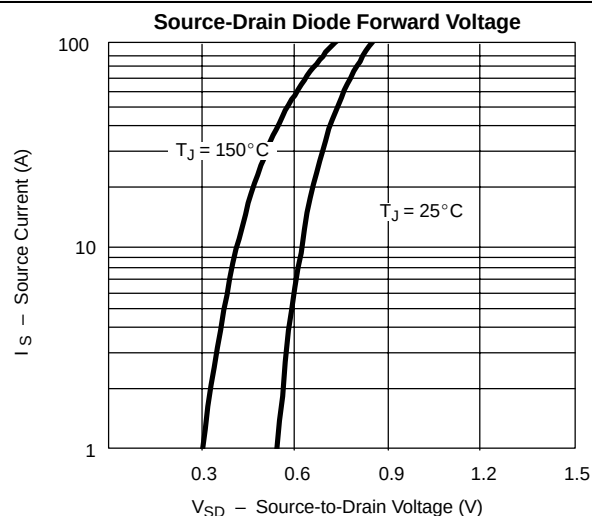
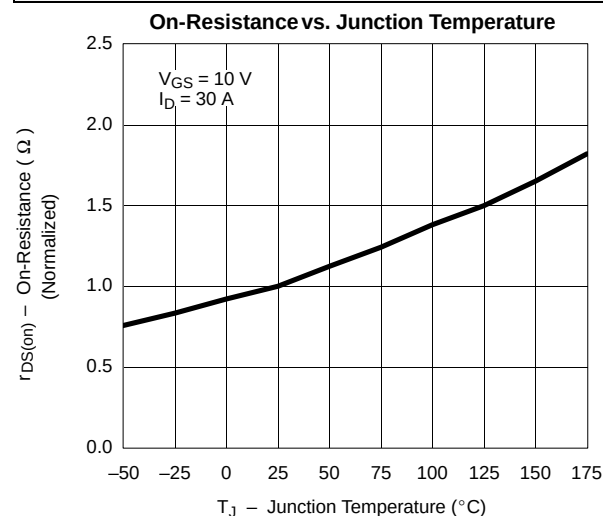
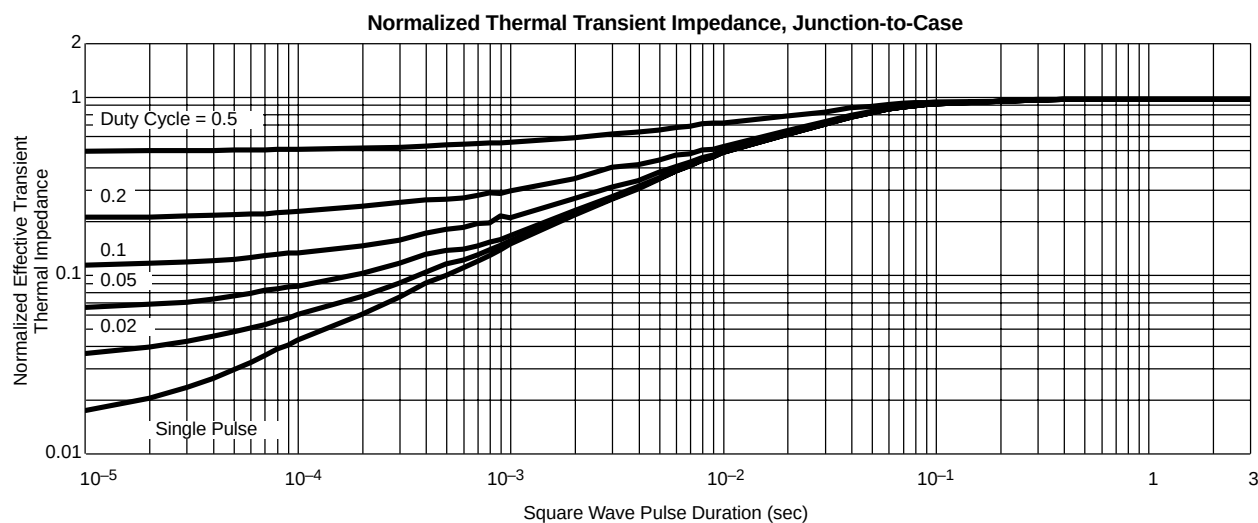
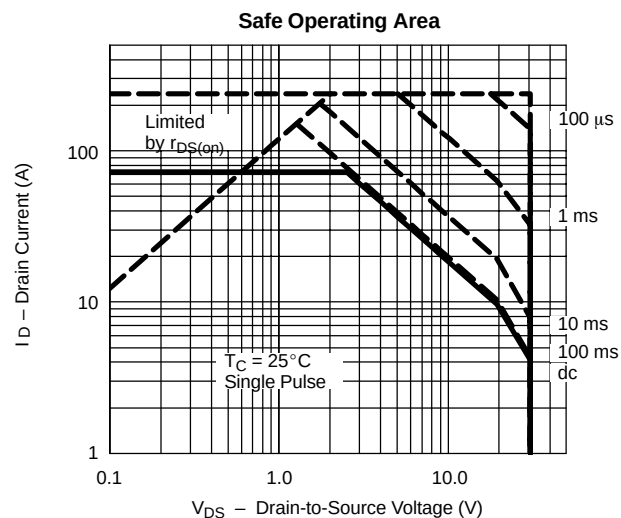
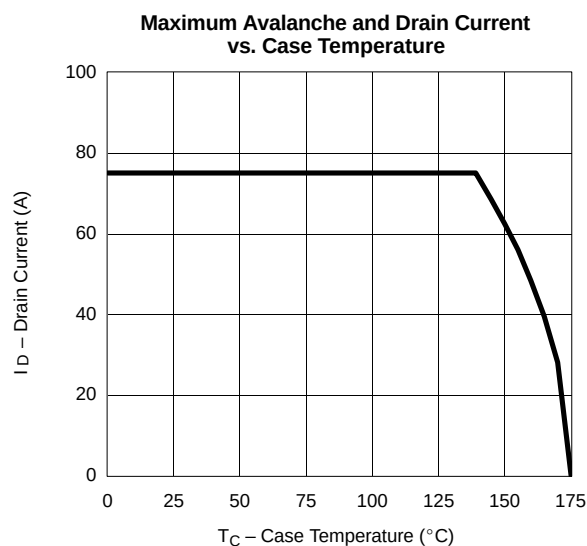
For SPICE model information via the Worldwide Web: <http://www.vishay.com/www/product/spice.htm>

SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ ^a	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 250 μA	30			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1		3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±500	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 30 V, V _{GS} = 0 V			1	μA
		V _{DS} = 30 V, V _{GS} = 0 V, T _J = 125 °C			50	
		V _{DS} = 30 V, V _{GS} = 0 V, T _J = 175 °C			200	
On-State Drain Current ^b	I _{D(on)}	V _{DS} = 5 V, V _{GS} = 10 V	120			A
Drain-Source On-State Resistance ^b	r _{DS(on)}	V _{GS} = 10 V, I _D = 75 A		0.0034	0.004	Ω
		V _{GS} = 4.5 V, I _D = 75 A		0.005	0.006	
		V _{GS} = 10 V, I _D = 25 A, T _J = 125 °C			0.006	
		V _{GS} = 10 V, I _D = 25 A, T _J = 175 °C			0.008	
Forward Transconductance ^b	g _{fs}	V _{DS} = 15 V, I _D = 25 A	30			S
Dynamic						
Input Capacitance	C _{ISS}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		10742		pF
Output Capacitance	C _{OSS}			1811		
Reverse Transfer Capacitance	C _{RSS}			775		
Total Gate Charge	Q _g	V _{DS} = 30 V, V _{GS} = 10 V, I _D = 75 A		200	250	nC
Gate-Source Charge	Q _{gs}			40		
Gate-Drain Charge	Q _{gd}			40		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 30 V, R _L = 0.6 Ω I _D ≅ 50 A, V _{GEN} = 10 V, R _G = 2.5 Ω		20	40	ns
Rise Time	t _r			40		
Turn-Off Delay Time	t _{d(off)}			190		
Fall Time	t _f			95		
Source-Drain Diode Ratings and Characteristics						
Diode Forward Voltage ^b	V _{SD}	I _F = 75 A, V _{GS} = 0 V			1.3	V
Reverse Recovery Time	t _{rr}	I _F = 50 A, di/dt = 100 A/μs		70	120	ns
Peak Reverse Recovery Current	I _{RM(rec)}			2.8	6	A
Reverse Recovery Charge	Q _{rr}			0.1	0.36	μC

Notes:

- a. For design aid only; not subject to production testing.
b. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.

**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)****Output Characteristics****Transfer Characteristics****Transconductance****On-Resistance vs. Drain Current****Capacitance****Gate Charge**

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**THERMAL RATINGS**



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.