

|      |              |      |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|      |              |      |







Note:

1.Material:



- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.30mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

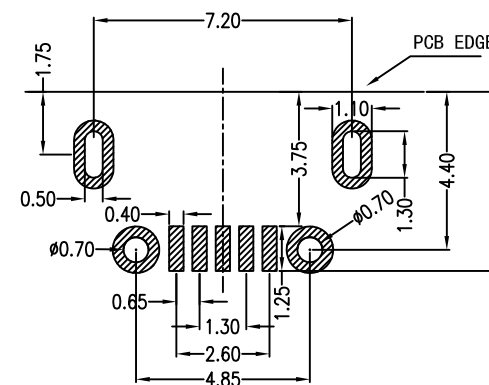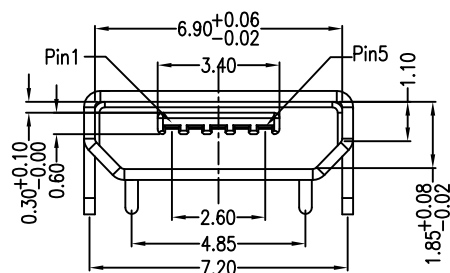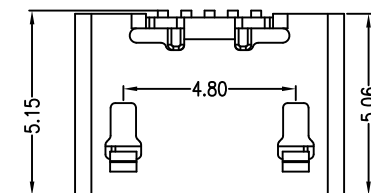

PCB图仅做参考



| 产品图<br>PRODUCT CHART DWG            |       |      |       | 深圳市精拓金电子有限公司 |            |               |     |                          |                                |
|-------------------------------------|-------|------|-------|--------------|------------|---------------|-----|--------------------------|--------------------------------|
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       |      |       | 单位<br>UNITS  | MM         | 制图<br>DRAWING | 尹先华 | 制图料号<br>PRODUCT PART NO. | 920-E62A2021S10103             |
| X.                                  | ±0.30 | X.   | ±5.°  | 比例<br>SCALE  | 1:1        | 审核<br>CHKD    | 郭治富 | 产品名称<br>PRODUCT NAME     | MICRO 5P-F B型7.2 4.85四牛角型无卷边无柱 |
| .XX                                 | ±0.15 | .XX  | ±1.°  | 日期<br>DATE   | 2021-04-16 | 核准<br>APPD    | 黄国荣 | 角法<br>VIEW               | SMT短针黑胶                        |
| .XXX                                | ±0.10 | .XXX | ±0.5° |              |            |               |     | 版本<br>VER                | AD                             |