



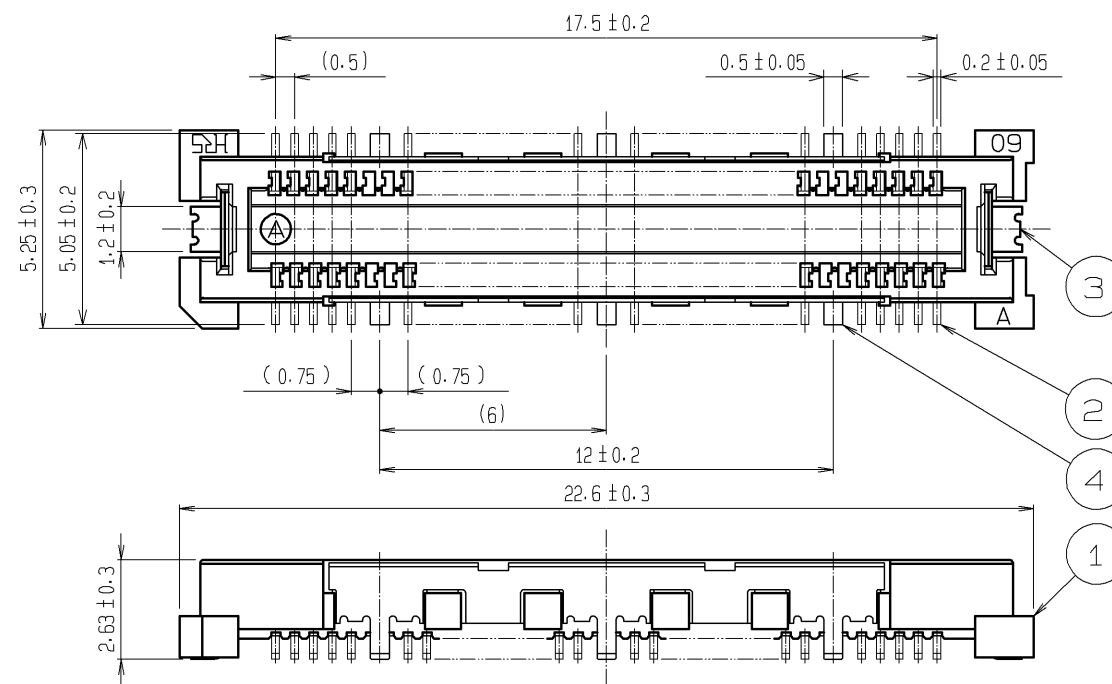


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

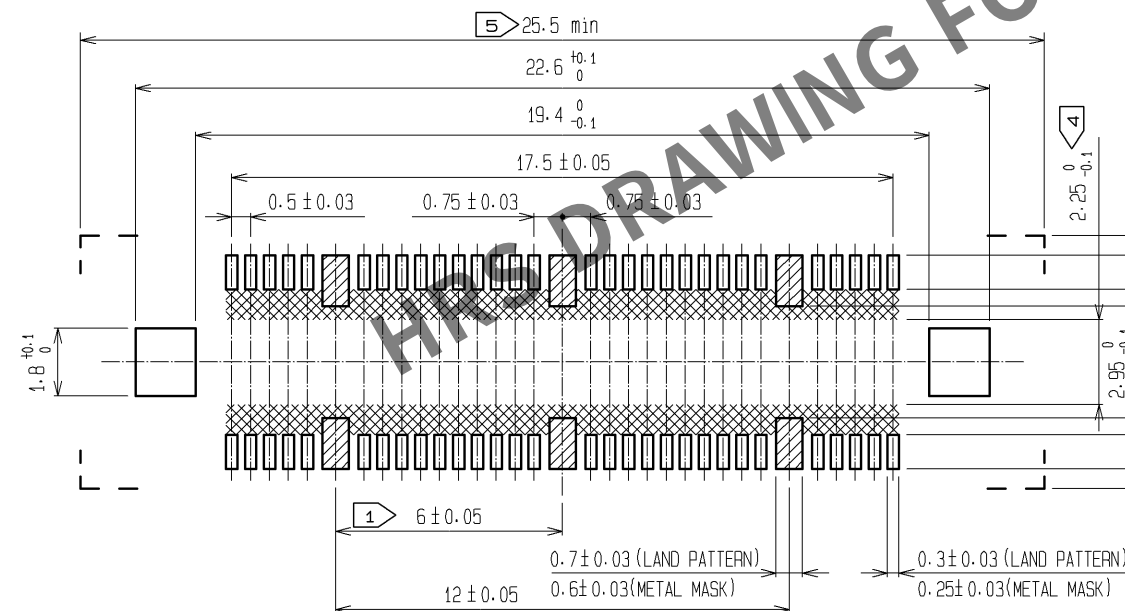


- NOTES
- ① 6 HATCHED  PARTS: GROUND CIRCUIT.
 - ② SMT LEAD-COPLANARITY: 0.1 MAX.
 - ③ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - ⑤ DO NOT MOUNT OTHER DEVICES ONTO  AREA, OR MATING PAIR CANNOT BE MATED.
 - ⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

SIGNAL PORTION CROSS SECTION (10:1)

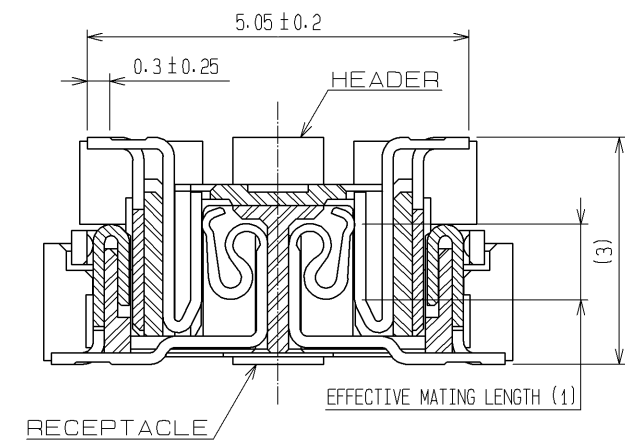

GROUND PORTION CROSS SECTION (10:1)

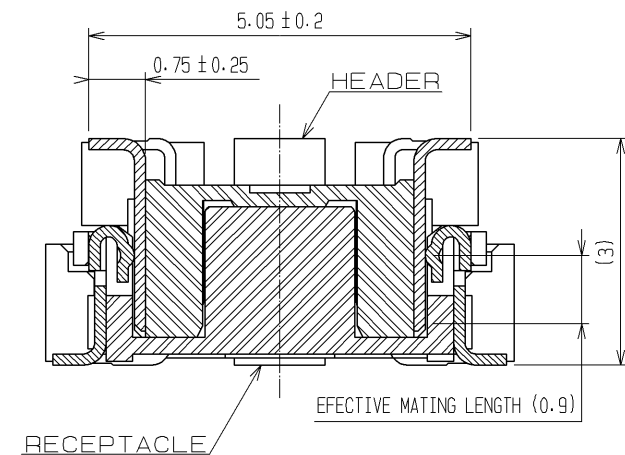

3, 4		PHOSPHOR BRONZE	TIN PLATING	2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.	
1		LCP	BEIGE UL94V-0			LEAD AREA : GOLD 0.05μm min.	
NO.		MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS	DESIGNED
mm		5 : 1		△			CHECKED
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		12.03.08		DRAWING NO. EDC3-152618-25	
		CHECKED : HT. YAMAGUCHI		12.03.08		PART NO. FX11B-60P/6-SV0.5(71)	
		DESIGNED : TS. MIYAKI		12.03.08		CODE NO. CL573-0612-8-71	
		DRAWN : TS. MIYAKI		12.03.08		1/1	