

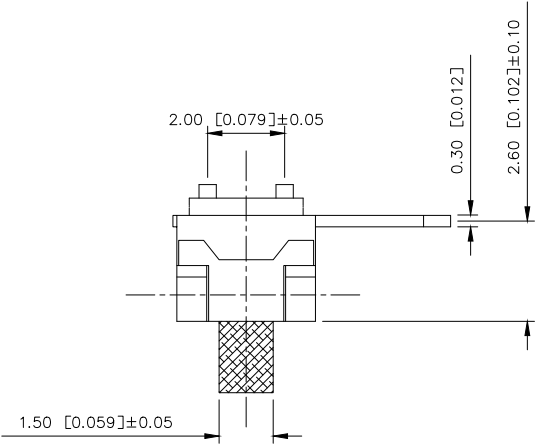
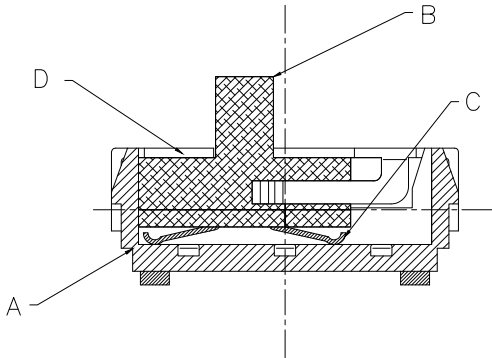
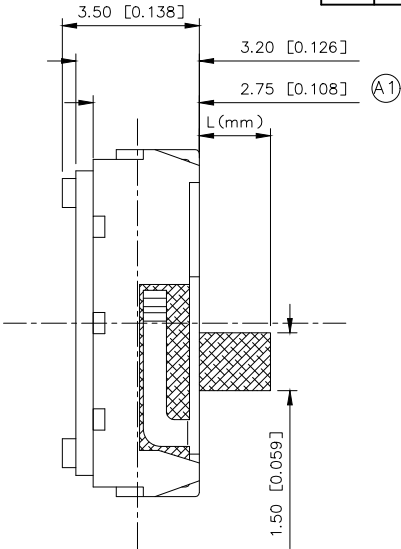


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A	(A1) X4	尺寸变更, 图面升级整理图面	2025.06.07

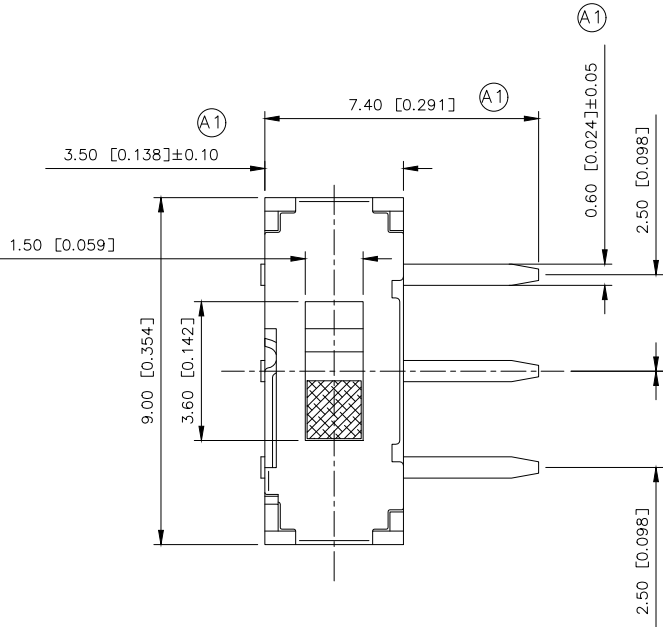

PAPT NO	L
SK-3260D-01-L1	2.0
SK-3260D-01-L3	3.0
SK-3260D-01-L4	4.0

额定范围 Rated range	50mA DDC12V
耐电压 Rate voltage current	AC100V(50/60Hz foy 1minute)
绝缘电阻 Insulted resistance	100MΩ min(DC 100V)
使用温度 Temperature range	-10℃~+60℃
寿命 life	10,000 cycles
操作力度: Operating force	200±50gf
	150±50gf

D	Cover	1	Sus	silvery white
C	Contact spring	1	Beryllium bronze	silvery white
B	Button	1	PA46	Ag Plated-silvery white
A	Base	1	PA6T+Brass	Ag Plated-Black
ITEM	PAPT NAME	QTY	MATERIAL	PLATED /COLOR

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK-3260D-01-X
APPROVED		SIZE:	A4	DWG NO.:	