

# Actuator

17-040351

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/17-040351>

Your product:

---



## 17-040351 Actuator

### FRONT

Front dimension:	Ø 9,5 mm
Front form:	round
Reflector:	Metal, polished chromium-plated, domed

### MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

### OPERATING-/INDICATION PART

Illumination colour:	Green
----------------------	-------

### ELECTRICAL CHARACTERISTICS

Operation current:	20 mA $\pm$ 15 %
Operating voltage:	24 V DC
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	32 mcd

### MECHANICAL CHARACTERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.005 kg
Tightening torque:	Fixing nut max. 0.2 Nm

## AMBIENT CONDITION

<b>Operating temperature:</b>	– 20 °C ... + 60 °C
<b>IP Protection:</b>	IP40 front side, IP65 front side, according to IEC 60529
<b>Storage temperature:</b>	– 25 °C ... + 80 °C


## CERTIFICATE

<b>Approbations:</b>	UL
<b>Conformities:</b>	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


## OTHER

<b>Kind of illumination:</b>	Single-LED
<b>Short Description:</b>	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green
<b>Hints:</b>	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

## Mounting cut-outs:

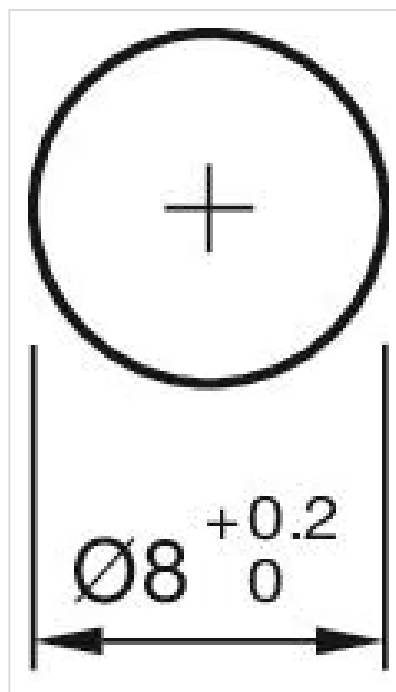

## Wiring diagrams:

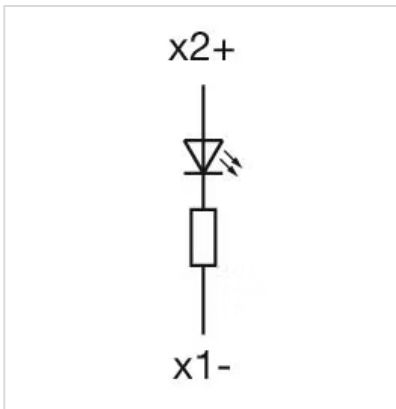

**Dimension drawings:**

