
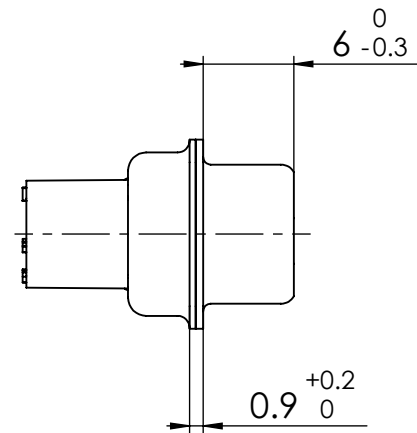
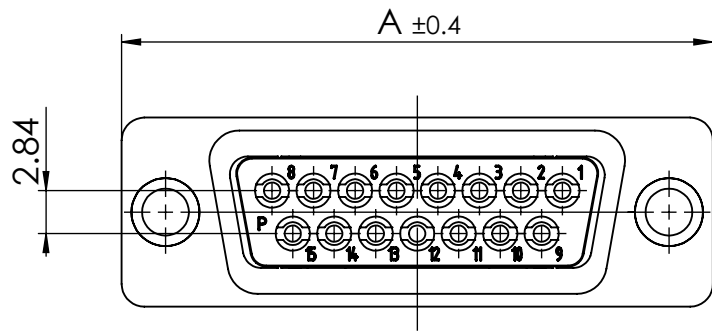
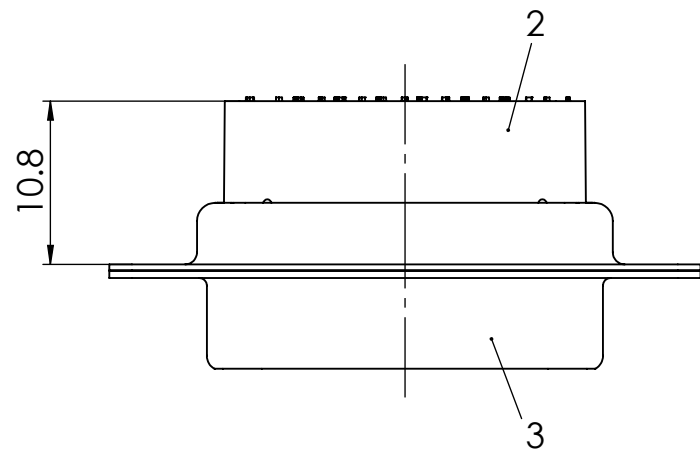


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

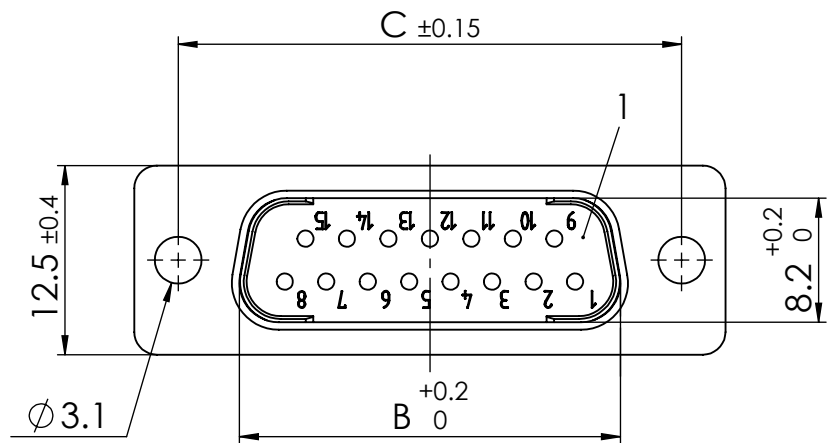

FLxx*)P7-K121

e.g. FL09P7-K121

*) xx No. of contacts 09, 15, 25 or 37

MATERIAL NUMBER	xx*)	A [mm]	B [mm]	C [mm]
1731090251	09	30.8	16.9	25
-	15	39.1	25.2	33.3
-	25	53	38.9	47.04
-	37	69.3	55.3	63.5

Crimp contacts not supplied with connector. Contacts must be ordered separately.

3	1	Shell	Steel	tin plated
2	1	Insulator rear part	PA (-55°C to +115°C)	black
1	1	Insulator front part	PBT acc. UL94V-0	black
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS mm		SCALE 2:1	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-mK				molex				
				CURRENT REVISION				FCT D-Sub Crimp Connector				
				DRWN: DRAWN BY msteinbrueck								