

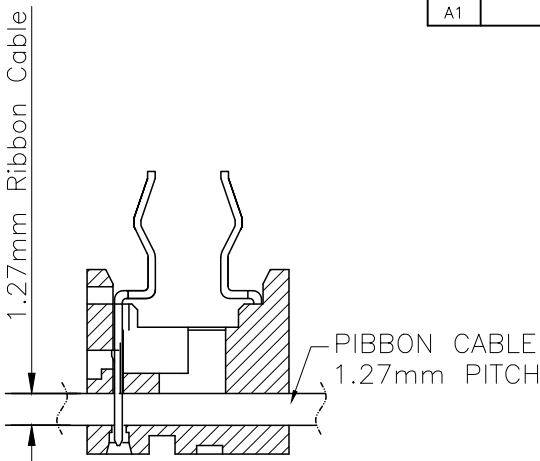
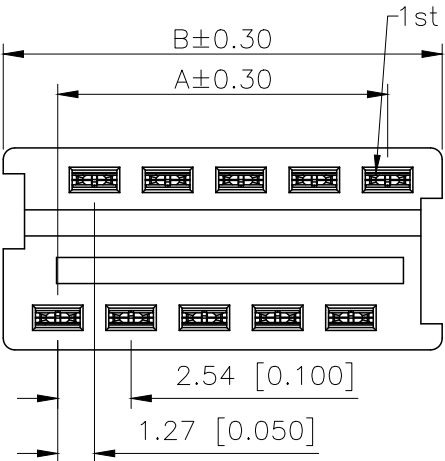


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.9	阿树

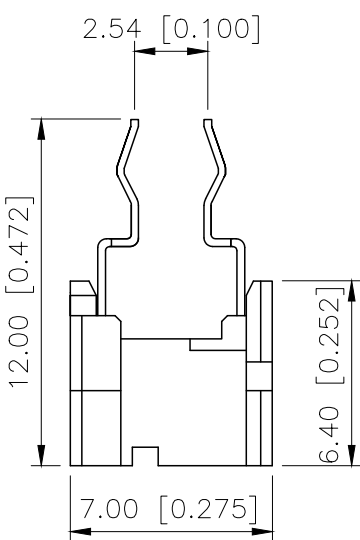

SECTION SHOWING

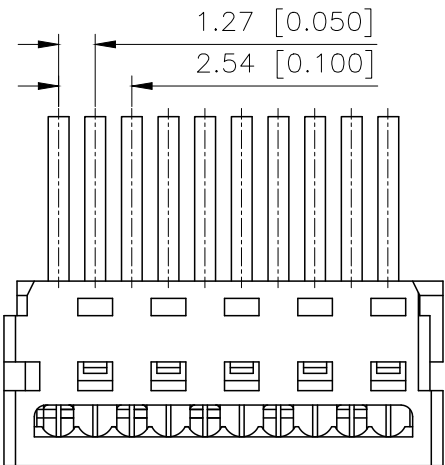


PART NO.:

X9127 H I-XX AI-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:H-HSG
- ③Appearance type:I-HSC+hardware
- ④Row No.-Pin No.:XX-04P~26P
- ⑤Plug the Pin &Special No.:A1-Doudle Deficiency
- ⑥Material:PT-PAT 94V-0
- ⑦Planting Category:SN-Bright Tin plating

- SPECIFICATIONS
- Voltage rating:500V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Life:5000

Poles	Dimensions(mm)	
	A	B
04	3.81	7.59
06	6.35	10.13
08	8.89	12.67
10	11.43	15.21
12	13.97	17.75
14	16.51	20.29
16	19.05	22.83
18	21.59	25.37
20	24.13	27.91
22	26.67	30.45
24	29.21	32.99
26	31.75	35.53

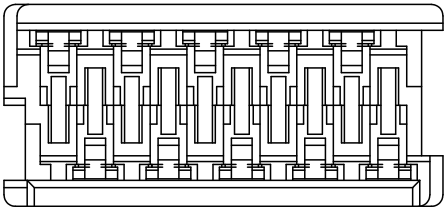

X9127HI-XXA1-PTSN	PBT UL 94V-0	Phosphor Bronze	TIN
PART NO	Material	Material(Pin)	Finish(Pin)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.27mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9127HI-XXA1-PTSN
APPROVED		SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1