

## PCB terminal block - PTPM 0,4/10-P-2,5 - 1780561

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB connector, nominal current: 4 A, rated voltage (III/2): 125 V, number of positions: 10, pitch: 2.5 mm, connection method: IDC fast connection, color: black, contact surface: Tin

### Your advantages

- ✓ Can be plugged into THR and SMD base strips



### Key Commercial Data

Packing unit	50 pc
GTIN	 4 046356 536202
GTIN	4046356536202

### Technical data

#### Dimensions

Pitch	2.5 mm
Dimension a	22.5 mm

#### General

Range of articles	PTPM 0,4/...-P
Number of positions	10
Connection method	IDC fast connection
Insulating material group	III
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V
Rated voltage (III/2)	125 V
Rated voltage (II/2)	125 V
Connection in acc. with standard	EN-VDE
Nominal current I <sub>N</sub>	4 A

# PCB terminal block - PTPM 0,4/10-P-2,5 - 1780561

## Technical data

### General

Nominal cross section	0.34 mm <sup>2</sup>
Maximum load current	4 A
Insulating material	PA/PC
Flammability rating according to UL 94	V0/V2

### Connection data

Conductor cross section flexible min.	0.25 mm <sup>2</sup>
Conductor cross section flexible max.	0.34 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	22
Minimum AWG according to UL/CUL	24
Maximum AWG according to UL/CUL	22
Wire diameter incl. insulation	1.6 mm (Terminal block is tested with PVC insulation - other insulation materials available on request)

### Standards and Regulations


Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0/V2

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Diagram

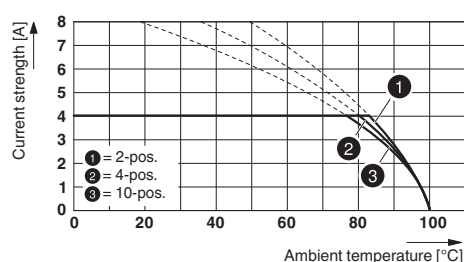

Dimensional drawing

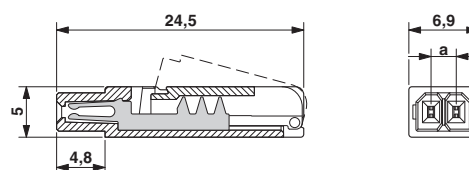

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1780561