

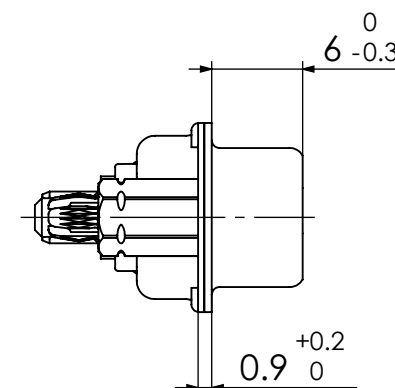
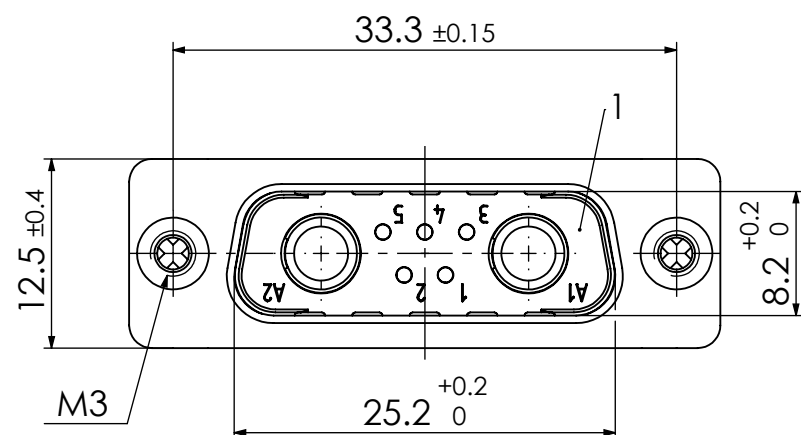
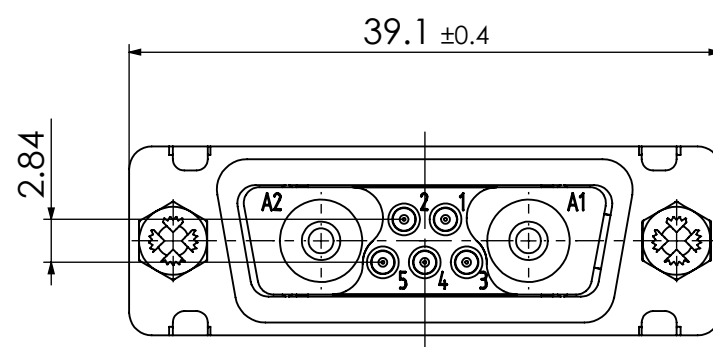


RoHS compliant
by exemption

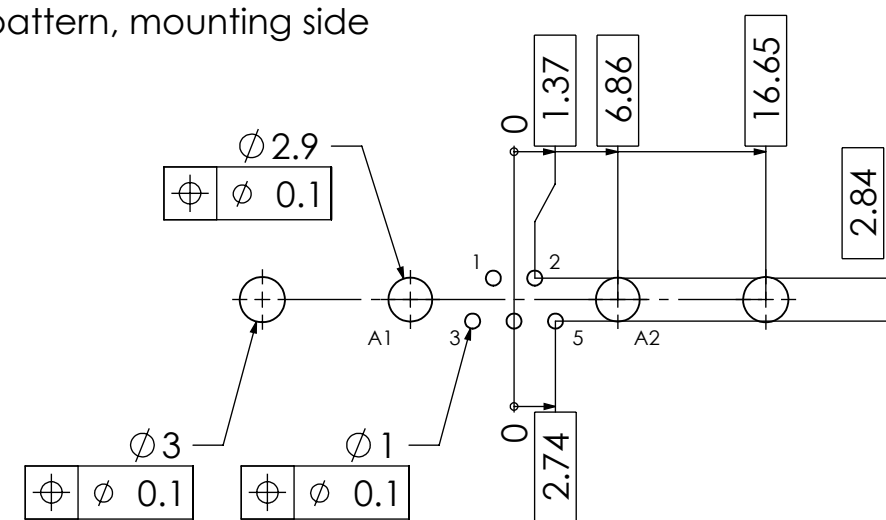

PCB hole pattern, mounting side

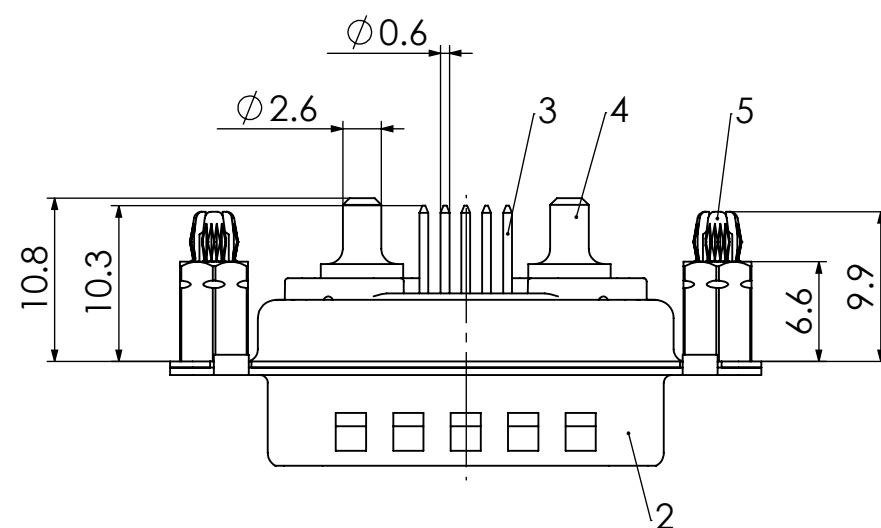

5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	2	High power contact	FMP014P104	20A
3	5	Signal contact	P1 / Brass	0.8μm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PCT (-55°C to +150°C)	natural
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS = 0 = 0 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex FCT D-Sub Mixed-Layout Connector			
					CURRENT REVISION						
					DRWN: DRAWN BY msteinbrueck 06-09-2023						
					APPR: APPR BY mteubel 15-09-2023						
	2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING			
	1				DRWN: DRAWN BY MTeubel 04-10-2011			MATERIAL NUMBER		REVISION	
	REV.		CH.-NO.		APPR: APPR BY sschref 04-10-2011			1731070819		2	
	REPLACEMENT FOR: 1731070819_Rev. A1			FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FH7W2P1-4870		CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.