

Frequency Mixer

RMS-5L+

Level 3 (LO Power +3 dBm) 400 to 1400 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

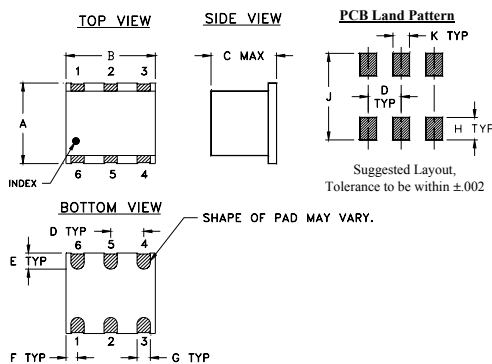


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40

G	H	J	K	wt
.040	.070	.270	.050	grams
1.02	1.78	6.86	1.27	0.50

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

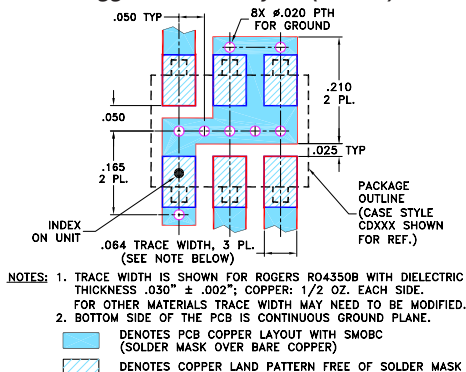

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- good conversion loss, 7.0 dB typ.
- small size, 0.25"x0.31"x0.2"
- wide bandwidth, 400-1400 MHz

Applications

- cellular
- ISM/GSM
- satellite distribution



Generic photo used for illustration purposes only

CASE STYLE: TT240

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)	LO-IF ISOLATION (dB)	IP3 at center band (dBm)
LO/RF IF	$\bar{X}$ σ Max.	Typ. Min.	Typ. Min.	Typ.
$f_L - f_U$				
400-1400 DC-800	7.0 0.2 9.8	22 14	22 6	9

1 dB COMP.: -3 dBm typ.


For phase detection, DC output positive with in-phase RF & LO.







L = low range [f_L to $10 f_L$]m = mid band [$2 f_L$ to $f_U/2$]M = mid range [$10 f_L$ to $f_U/2$]U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF LO	LO +3dBm	LO +3dBm	LO +3dBm	LO +3dBm	LO +3dBm
400.00	430.00	7.74	39.94	28.82	1.45
476.92	506.92	6.92	43.12	28.11	1.53
553.85	583.85	6.37	56.16	27.98	1.56
605.13	635.13	6.19	41.52	27.30	1.64
630.77	660.77	6.10	37.96	26.89	1.71
707.69	737.69	5.93	29.29	24.68	1.75
733.33	763.33	5.89	27.74	24.04	1.78
810.26	840.26	5.81	24.32	21.96	1.80
835.90	865.90	5.95	23.55	21.29	1.85
887.18	917.18	6.28	22.39	20.26	1.93
912.82	942.82	6.26	21.89	19.74	2.03
989.74	959.74	6.84	20.56	17.73	2.10
1066.67	1036.67	7.26	19.47	15.58	2.18
1117.95	1087.95	7.40	18.97	14.31	2.28
1143.59	1113.59	7.64	18.77	13.78	2.34
1220.51	1190.51	7.63	18.25	12.26	2.51
1297.44	1267.44	7.75	17.96	10.95	2.68
1348.72	1318.72	7.73	17.87	10.20	2.89
1374.36	1344.36	7.64	17.90	9.72	2.98
1400.00	1370.00	7.79	17.92	9.13	3.06

Electrical Schematic

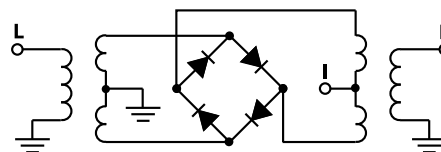

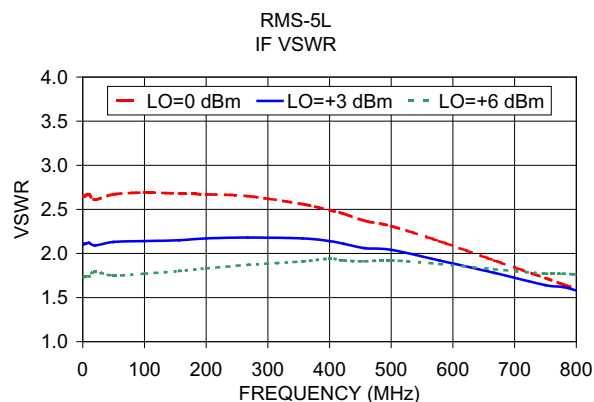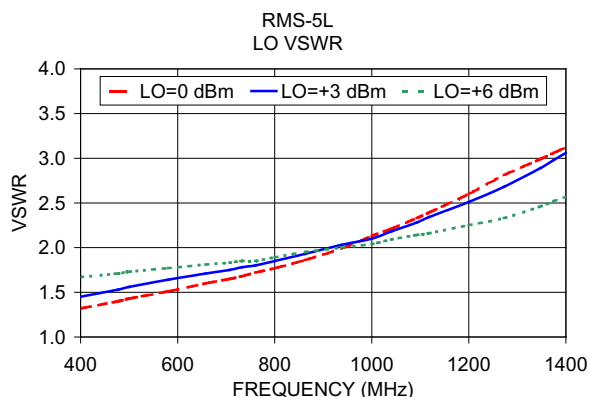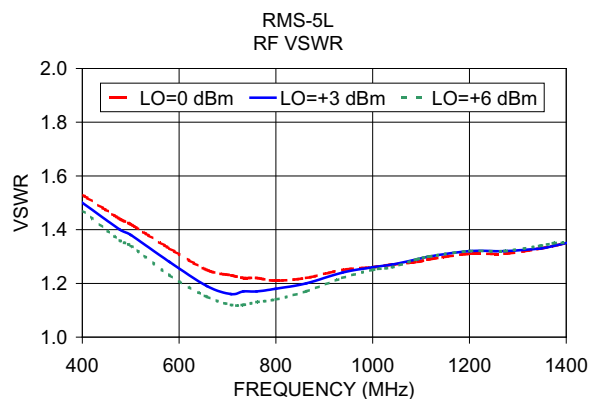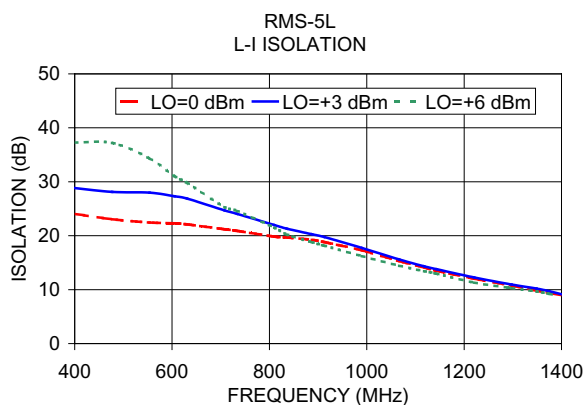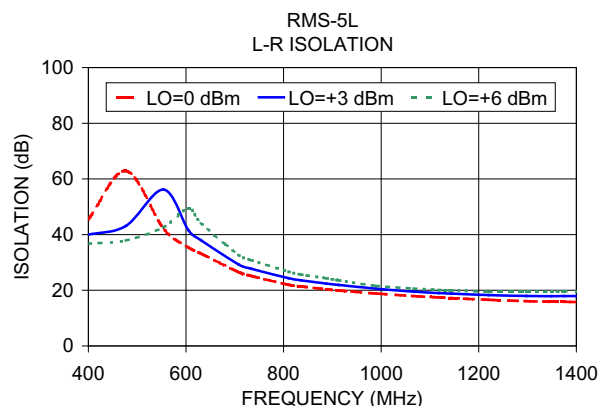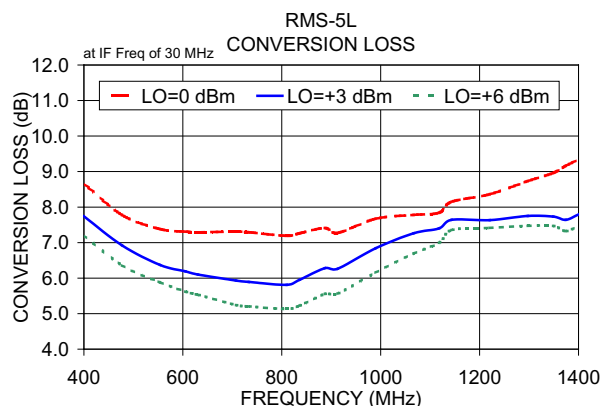

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

RMS-5L+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		0	+3	+6
400.1	430.1	8.43	7.40	6.89
440.1	470.1	8.00	7.00	6.48
480.1	510.1	7.81	6.83	6.31
520.1	550.1	7.53	6.58	6.05
560.1	590.1	7.38	6.45	5.95
600.1	630.1	7.19	6.26	5.76
640.1	670.1	7.13	6.16	5.66
680.1	710.1	7.03	6.02	5.50
720.1	750.1	6.98	5.95	5.40
760.1	790.1	6.99	5.91	5.34
800.1	830.1	7.01	5.90	5.31
840.1	870.1	7.15	6.00	5.35
880.1	910.1	7.29	6.15	5.42
920.1	950.1	7.47	6.31	5.55
960.1	990.1	7.70	6.53	5.73
1000.1	1030.1	7.87	6.70	5.88
1040.1	1070.1	8.17	7.03	6.18
1080.1	1110.1	8.41	7.31	6.47
1120.1	1150.1	8.57	7.63	6.85
1160.1	1190.1	8.65	7.80	7.10
1200.1	1230.1	8.63	7.87	7.30
1240.1	1270.1	8.63	7.92	7.41
1280.1	1310.1	8.63	7.90	7.48
1320.1	1350.1	8.69	7.88	7.50
1360.1	1390.1	8.72	7.87	7.53
1400.1	1430.1	8.75	7.83	7.51
1440.1	1470.1	8.82	7.84	7.51
1480.1	1510.1	8.91	7.83	7.50
1520.1	1550.1	9.06	7.86	7.46
1560.1	1590.1	9.24	7.89	7.44
1600.1	1630.1	9.43	7.98	7.51
1640.1	1670.1	9.60	8.05	7.47
1680.1	1710.1	9.86	8.21	7.66
1720.1	1750.1	10.10	8.38	7.84
1760.1	1790.1	10.61	8.70	8.14
1780.1	1810.1	11.04	8.96	8.33
1820.1	1850.1	11.56	9.27	8.58
1840.1	1870.1	11.89	9.46	8.72
1880.1	1910.1	12.68	9.90	8.88
1900.1	1930.1	12.75	9.95	8.94

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		0	+3	+6
400.1	430.1	9.93	14.07	15.86
440.1	470.1	11.15	17.16	18.34
480.1	510.1	7.91	12.47	15.91
520.1	550.1	8.65	14.11	14.23
560.1	590.1	8.22	13.63	12.36
600.1	630.1	7.26	14.47	11.68
640.1	670.1	8.61	14.97	9.87
680.1	710.1	8.15	14.02	9.25
720.1	750.1	7.21	13.73	10.72
760.1	790.1	7.69	15.15	10.01
800.1	830.1	7.17	12.26	9.37
840.1	870.1	6.52	10.94	10.76
880.1	910.1	7.24	10.10	10.36
920.1	950.1	7.82	8.77	10.10
960.1	990.1	10.22	10.81	10.36
1000.1	1030.1	10.65	16.43	10.94
1040.1	1070.1	8.59	13.19	15.45
1080.1	1110.1	5.69	9.02	14.03
1120.1	1150.1	5.17	7.07	11.87
1160.1	1190.1	4.74	5.72	8.26
1200.1	1230.1	4.73	5.03	6.92
1240.1	1270.1	4.93	5.19	8.04
1280.1	1310.1	5.32	5.70	7.52
1320.1	1350.1	6.59	5.66	6.77
1360.1	1390.1	5.92	5.96	7.24
1400.1	1430.1	6.02	6.64	6.56
1440.1	1470.1	5.66	5.98	6.52
1480.1	1510.1	5.51	6.59	6.55
1520.1	1550.1	5.28	5.99	6.86
1560.1	1590.1	4.90	6.05	6.43
1600.1	1630.1	4.16	5.45	6.07
1640.1	1670.1	4.28	5.78	6.30
1680.1	1710.1	3.90	4.50	5.46
1720.1	1750.1	3.46	3.92	4.19
1760.1	1790.1	3.23	3.71	3.73
1780.1	1810.1	2.82	2.66	3.25
1820.1	1850.1	2.78	2.53	3.89
1840.1	1870.1	2.72	2.61	5.27
1880.1	1910.1	3.89	2.74	5.74
1900.1	1930.1	4.23	2.85	6.36

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=-3dBm (dB)		
		@LO (dBm)		
		0	+3	+6
400.1	430.1	0.22	0.11	0.08
440.1	470.1	0.22	0.08	0.10
480.1	510.1	0.28	0.12	0.09
520.1	550.1	0.40	0.16	0.19
560.1	590.1	0.43	0.22	0.21
600.1	630.1	0.55	0.33	0.32
640.1	670.1	0.74	0.47	0.38
680.1	710.1	0.80	0.54	0.44
720.1	750.1	0.82	0.51	0.43
760.1	790.1	0.92	0.60	0.47
800.1	830.1	0.94	0.68	0.52
840.1	870.1	1.03	0.77	0.57
880.1	910.1	0.99	0.77	0.64
920.1	950.1	1.06	0.81	0.72
960.1	990.1	0.94	0.78	0.75
1000.1	1030.1	0.85	0.74	0.81
1040.1	1070.1	0.66	0.62	0.65
1080.1	1110.1	0.55	0.51	0.56
1120.1	1150.1	0.49	0.32	0.38
1160.1	1190.1	0.51	0.27	0.26
1200.1	1230.1	0.57	0.20	0.19
1240.1	1270.1	0.62	0.27	0.19
1280.1	1310.1	0.69	0.29	0.19
1320.1	1350.1	0.70	0.37	0.26
1360.1	1390.1	0.81	0.39	0.25
1400.1	1430.1	0.85	0.56	0.27
1440.1	1470.1	0.91	0.57	0.36
1480.1	1510.1	1.03	0.66	0.44
1520.1	1550.1	1.03	0.71	0.46
1560.1	1590.1	1.10	0.80	0.51
1600.1	1630.1	1.11	0.88	0.56
1640.1	1670.1	1.13	0.89	0.60
1680.1	1710.1	1.13	0.96	0.74
1720.1	1750.1	1.12	0.90	0.70
1760.1	1790.1	1.06	0.95	0.69
1780.1	1810.1	1.03	1.00	0.69
1820.1	1850.1	0.91	0.91	0.60
1840.1	1870.1	0.91	0.96	0.57
1880.1	1910.1	0.63	0.98	0.64
1900.1	1930.1	0.53	0.91	0.57

REV. X2

RMS-5L+

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

RMS-5L+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=900.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=400.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1400.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+3			+3			+3
500.0	400.1	5.05	10.0	410.1	7.19	800.0	600.1	7.72
480.4	419.7	4.98	29.8	429.9	7.39	780.3	619.9	7.66
460.8	439.3	4.96	49.5	449.6	7.51	760.5	639.6	7.53
441.2	458.9	4.99	69.3	469.4	7.61	740.7	659.4	7.51
421.6	478.5	4.98	89.0	489.1	7.68	721.0	679.1	7.46
402.0	498.1	4.95	108.8	508.9	7.74	701.3	698.9	7.44
382.4	517.7	4.98	128.5	528.6	7.83	681.5	718.6	7.45
362.8	537.3	5.06	148.3	548.4	7.89	661.7	738.4	7.43
343.2	556.9	5.13	168.0	568.1	7.93	642.0	758.1	7.48
323.6	576.5	5.19	187.8	587.9	7.95	622.3	777.9	7.49
304.0	596.1	5.27	207.5	607.6	7.93	602.5	797.6	7.56
284.4	615.7	5.34	227.3	627.4	7.94	582.7	817.4	7.55
264.8	635.3	5.44	247.0	647.1	7.97	563.0	837.1	7.62
245.2	654.9	5.52	266.8	666.9	8.00	543.3	856.9	7.77
225.6	674.5	5.64	286.5	686.6	7.92	523.5	876.6	7.85
206.0	694.1	5.67	306.3	706.4	7.95	503.8	896.4	8.05
166.8	733.3	5.83	326.0	726.1	7.91	484.0	916.1	8.11
147.2	752.9	5.94	345.8	745.9	7.95	464.3	935.9	8.26
108.0	792.1	5.98	365.5	765.6	7.96	444.5	955.6	8.41
88.4	811.7	6.01	385.3	785.4	7.87	424.8	975.4	8.53
49.2	850.9	6.12	405.0	805.1	7.93	405.0	995.1	8.51
29.6	870.5	6.15	424.8	824.9	7.98	385.3	1014.9	8.55
10.0	910.1	6.13	444.5	844.6	7.96	365.5	1034.6	8.65
29.6	929.7	6.14	464.3	864.4	7.93	345.8	1054.4	8.62
68.8	968.9	6.13	484.0	884.1	7.97	326.0	1074.1	8.60
88.4	988.5	6.15	503.8	903.9	7.98	306.3	1093.9	8.54
127.6	1027.7	6.16	523.5	923.6	7.93	286.5	1113.6	8.44
147.2	1047.3	6.27	543.3	943.4	8.06	266.8	1133.4	8.41
186.4	1086.5	6.36	563.0	963.1	8.07	247.0	1153.1	8.30
206.0	1106.1	6.41	582.8	982.9	8.15	227.2	1172.9	8.23
245.2	1145.3	6.49	602.5	1002.6	8.20	207.5	1192.6	8.13
264.8	1164.9	6.50	622.3	1022.4	8.26	187.8	1212.4	8.12
304.0	1204.1	6.55	642.0	1042.1	8.30	168.0	1232.1	8.04
323.6	1223.7	6.63	661.8	1061.9	8.30	148.3	1251.9	7.97
362.8	1262.9	6.77	681.5	1081.6	8.38	128.5	1271.6	8.02
382.4	1282.5	6.80	701.3	1101.4	8.35	108.8	1291.4	7.94
421.6	1321.7	6.89	721.0	1121.1	8.38	89.0	1311.1	7.96
441.2	1341.3	6.92	740.8	1140.9	8.37	69.2	1330.9	7.92
480.4	1380.5	6.83	780.2	1180.4	8.39	29.8	1370.4	7.91
500.0	1400.1	6.83	800.0	1200.1	8.33	10.0	1390.1	7.80

REV. X2

RMS-5L+

100818

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	0	+3	+6	0	+3	+6
400.1	27.94	27.20	26.50	28.68	32.28	31.88
440.1	27.53	26.78	26.05	28.26	32.00	31.12
480.1	27.84	27.09	26.37	28.22	32.22	30.82
520.1	28.55	27.76	27.03	27.88	32.37	30.34
560.1	28.85	28.06	27.28	27.90	32.47	29.30
600.1	29.26	28.46	27.63	28.13	32.43	28.20
640.1	30.13	29.36	28.51	28.59	31.59	26.56
680.1	31.60	30.96	30.07	28.80	31.27	25.89
720.1	32.86	32.38	31.29	29.47	30.69	25.02
760.1	33.95	33.91	32.55	30.76	30.26	24.34
800.1	35.67	36.58	34.56	32.88	28.84	23.18
840.1	37.14	40.60	37.31	35.10	27.16	22.02
880.1	36.80	45.35	41.96	36.12	25.65	21.18
920.1	35.29	44.56	46.09	32.61	23.18	19.40
960.1	33.36	38.85	41.40	29.94	21.74	18.26
1000.1	31.38	35.11	37.11	27.80	20.61	17.33
1040.1	29.39	32.14	33.76	25.83	19.56	16.50
1080.1	27.82	29.95	31.25	24.37	18.83	15.99
1120.1	26.90	28.67	29.72	22.69	17.90	15.32
1160.1	25.89	27.39	28.34	21.93	17.48	14.94
1200.1	25.01	26.33	27.21	21.02	16.91	14.44
1240.1	24.31	25.49	26.38	20.03	16.34	13.99
1280.1	23.74	24.84	25.75	18.89	15.66	13.45
1320.1	23.25	24.34	25.23	17.80	14.93	12.89
1360.1	22.91	24.10	25.04	16.91	14.40	12.54
1400.1	22.55	23.82	24.82	15.86	13.65	11.93
1440.1	22.34	23.74	24.84	14.95	13.03	11.47
1480.1	21.97	23.55	24.80	14.16	12.45	11.05
1520.1	21.81	23.56	24.98	13.47	11.98	10.68
1560.1	21.66	23.57	25.16	12.72	11.43	10.24
1600.1	21.16	23.27	25.08	12.27	11.18	10.11
1640.1	20.63	22.89	24.87	11.67	10.78	9.79
1680.1	20.50	22.81	24.86	11.15	10.50	9.64
1720.1	19.78	22.04	24.09	10.69	10.26	9.51
1760.1	19.00	21.09	23.07	10.16	9.92	9.27
1780.1	18.93	20.97	22.94	9.85	9.71	9.11
1820.1	18.16	20.08	22.08	9.17	9.19	8.68
1840.1	18.34	20.23	22.25	8.87	8.93	8.46
1880.1	17.64	19.48	21.52	8.06	8.21	7.86
1900.1	17.59	19.38	21.39	7.67	7.87	7.63

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		0	+3	+6
400.1	430.1	17.71	16.65	16.07
440.1	470.1	17.28	16.22	15.72
480.1	510.1	16.85	15.83	15.39
520.1	550.1	16.84	15.75	15.28
560.1	590.1	17.19	16.01	15.40
600.1	630.1	17.82	16.68	15.96
640.1	670.1	18.75	17.80	17.17
680.1	710.1	19.79	19.03	18.46
720.1	750.1	20.90	20.22	19.61
760.1	790.1	21.82	20.89	20.13
800.1	830.1	22.74	21.07	19.97
840.1	870.1	23.90	21.41	19.78
880.1	910.1	24.38	21.82	19.63
920.1	950.1	23.37	21.84	19.85
960.1	990.1	21.31	20.78	19.59
1000.1	1030.1	19.14	19.04	18.55
1040.1	1070.1	17.55	17.61	17.56
1080.1	1110.1	16.31	16.38	16.47
1120.1	1150.1	15.34	15.36	15.49
1160.1	1190.1	14.58	14.63	14.84
1200.1	1230.1	13.99	14.15	14.45
1240.1	1270.1	13.55	13.81	14.22
1280.1	1310.1	13.25	13.58	14.08
1320.1	1350.1	13.10	13.50	14.04
1360.1	1390.1	13.09	13.55	14.13
1400.1	1430.1	13.14	13.68	14.28
1440.1	1470.1	13.29	13.92	14.55
1480.1	1510.1	13.41	14.15	14.82
1520.1	1550.1	13.57	14.45	15.21
1560.1	1590.1	13.71	14.78	15.66
1600.1	1630.1	13.85	15.09	16.16
1640.1	1670.1	13.88	15.34	16.60
1680.1	1710.1	13.75	15.44	16.89
1720.1	1750.1	13.56	15.43	16.97
1760.1	1790.1	13.24	15.22	16.88
1780.1	1810.1	13.06	15.14	16.95
1820.1	1850.1	12.94	15.16	17.19
1840.1	1870.1	12.97	15.26	17.47
1880.1	1910.1	12.95	15.37	17.79
1900.1	1930.1	13.27	15.77	18.28

Frequency Mixer

RMS-5L+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1400.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		0	+3	+6		0	+3	+6		0	+3	+6
400.1	430.1	4.01	3.57	3.39	400.1	1.26	1.66	2.28	10.0	2.07	1.75	1.48
440.1	470.1	3.33	2.99	2.86	440.1	1.27	1.70	2.32	29.8	1.88	1.46	1.18
480.1	510.1	2.85	2.57	2.46	480.1	1.30	1.72	2.34	49.5	1.81	1.41	1.15
520.1	550.1	2.48	2.23	2.14	520.1	1.30	1.74	2.37	69.3	1.79	1.37	1.11
560.1	590.1	2.16	1.95	1.87	560.1	1.32	1.78	2.40	89.0	1.78	1.44	1.13
600.1	630.1	1.95	1.75	1.66	600.1	1.35	1.82	2.44	108.8	1.84	1.45	1.13
640.1	670.1	1.75	1.55	1.46	640.1	1.39	1.88	2.50	128.5	1.83	1.44	1.13
680.1	710.1	1.64	1.42	1.31	680.1	1.41	1.88	2.49	148.3	1.80	1.42	1.14
720.1	750.1	1.55	1.31	1.19	720.1	1.44	1.92	2.52	168.0	1.80	1.41	1.14
760.1	790.1	1.58	1.31	1.14	760.1	1.46	1.94	2.53	187.8	1.85	1.44	1.16
800.1	830.1	1.63	1.35	1.18	800.1	1.51	1.98	2.57	207.5	1.84	1.45	1.16
840.1	870.1	1.81	1.51	1.33	840.1	1.55	2.03	2.61	227.3	1.83	1.43	1.15
880.1	910.1	2.00	1.69	1.48	880.1	1.58	2.06	2.62	247.0	1.84	1.43	1.14
920.1	950.1	2.26	1.94	1.72	920.1	1.64	2.13	2.70	266.8	1.81	1.41	1.12
960.1	990.1	2.52	2.20	1.96	960.1	1.68	2.15	2.70	286.5	1.80	1.40	1.12
1000.1	1030.1	2.76	2.44	2.19	1000.1	1.71	2.19	2.72	306.3	1.80	1.39	1.12
1040.1	1070.1	3.07	2.75	2.48	1040.1	1.75	2.22	2.74	326.0	1.80	1.39	1.11
1080.1	1110.1	3.27	2.99	2.73	1080.1	1.77	2.23	2.73	345.8	1.77	1.37	1.10
1120.1	1150.1	3.51	3.27	3.04	1120.1	1.85	2.30	2.81	365.5	1.77	1.37	1.09
1160.1	1190.1	3.58	3.43	3.27	1160.1	1.88	2.32	2.81	385.3	1.76	1.35	1.08
1200.1	1230.1	3.62	3.52	3.44	1200.1	1.93	2.36	2.85	405.0	1.75	1.35	1.07
1240.1	1270.1	3.61	3.54	3.53	1240.1	2.00	2.43	2.90	424.8	1.74	1.34	1.07
1280.1	1310.1	3.67	3.58	3.60	1280.1	2.04	2.45	2.90	444.5	1.73	1.32	1.07
1320.1	1350.1	3.65	3.53	3.55	1320.1	2.10	2.48	2.92	464.3	1.73	1.32	1.06
1360.1	1390.1	3.70	3.55	3.57	1360.1	2.15	2.50	2.91	484.0	1.72	1.31	1.05
1400.1	1430.1	3.65	3.47	3.48	1400.1	2.20	2.52	2.91	503.8	1.70	1.29	1.04
1440.1	1470.1	3.70	3.48	3.46	1440.1	2.26	2.57	2.93	523.5	1.69	1.28	1.04
1480.1	1510.1	3.67	3.41	3.35	1480.1	2.32	2.59	2.93	543.3	1.68	1.27	1.05
1520.1	1550.1	3.79	3.45	3.33	1520.1	2.38	2.63	2.94	563.0	1.66	1.26	1.05
1560.1	1590.1	3.73	3.33	3.15	1560.1	2.43	2.64	2.92	582.8	1.64	1.26	1.06
1600.1	1630.1	3.78	3.30	3.08	1600.1	2.49	2.66	2.92	602.5	1.62	1.24	1.08
1640.1	1670.1	3.74	3.20	2.92	1640.1	2.54	2.67	2.90	622.3	1.62	1.23	1.09
1680.1	1710.1	3.84	3.25	2.91	1680.1	2.57	2.68	2.88	642.0	1.60	1.23	1.11
1720.1	1750.1	3.88	3.26	2.87	1720.1	2.64	2.71	2.89	661.8	1.60	1.23	1.12
1760.1	1790.1	3.94	3.32	2.89	1760.1	2.67	2.72	2.88	681.5	1.59	1.21	1.13
1780.1	1810.1	4.14	3.45	2.97	1780.1	2.68	2.71	2.87	701.3	1.57	1.21	1.14
1820.1	1850.1	4.11	3.42	2.92	1820.1	2.73	2.75	2.90	721.0	1.53	1.20	1.17
1840.1	1870.1	4.12	3.42	2.91	1840.1	2.76	2.76	2.89	740.8	1.53	1.20	1.20
1880.1	1910.1	4.56	3.71	3.11	1880.1	2.74	2.75	2.85	780.3	1.50	1.19	1.22
1900.1	1930.1	4.44	3.60	3.01	1900.1	2.78	2.77	2.86	800.0	1.47	1.18	1.24

REV. X2

RMS-5L+

100818

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+5	4	11	21	22	39	40	54	50	60
1	-	15	+0	25	19	38	39	43	51	55	70	67
2	112	43	33	48	35	47	55	57	72	70	71	85
3	117	76	59	61	59	65	66	73	83	73	89	84
4	116	91	94	83	78	77	74	88	87	87	93	91
5	115	96	95	102	85	90	77	91	92	110	97	99
6	109	105	111	94	100	89	90	77	84	90	95	100
7	108	100	99	100	97	97	105	89	92	83	92	100
8	120	97	99	108	98	98	99	103	92	85	86	103
9	109	98	102	95	112	102	99	100	94	88	95	94
10	124	94	102	92	106	107	94	106	100	102	88	86
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; -18.00 dBm.
LO IN: 930.01 MHz; +3.00 dBm
IF OUT: 29.91 MHz; -24.36 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	16	22	35	33	52	53	64	66	73
1	-	15	+0	26	21	41	43	54	56	68	72	77
2	99	33	25	38	26	38	49	50	64	71	72	85
3	116	54	41	40	43	59	48	58	61	59	75	73
4	111	58	65	61	63	53	60	56	66	68	83	83
5	110	69	67	73	57	55	58	59	69	68	86	72
6	107	88	79	69	86	75	61	65	67	68	81	80
7	122	101	89	86	82	97	73	73	69	74	82	80
8	105	103	111	99	94	84	93	89	75	76	81	81
9	113	109	103	124	98	94	87	97	88	82	81	89
10	107	113	108	109	110	106	108	108	111	97	94	87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; -8.00 dBm.
LO IN: 930.01 MHz; +3.00 dBm
IF OUT: 29.91 MHz; -14.49 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

RMS-5L+

100818

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

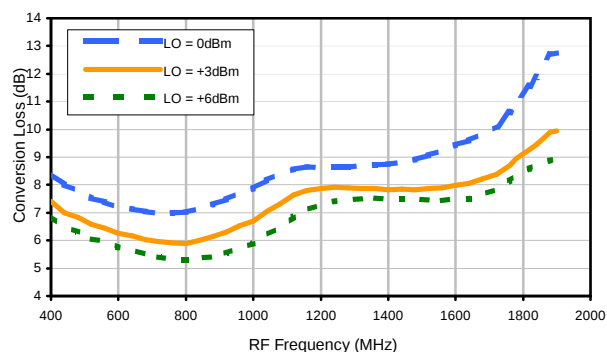


Conversion Loss vs. LO @ RF=900.1MHz

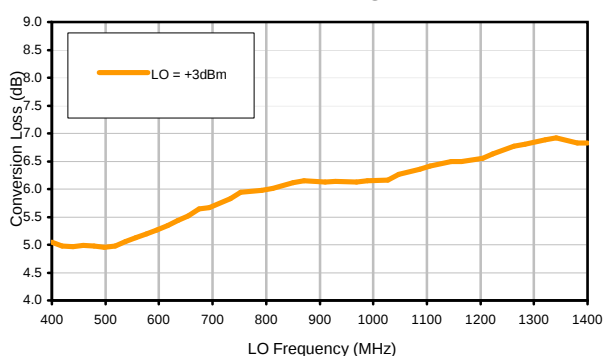


Conversion Loss vs. IF @ RF=900.1MHz

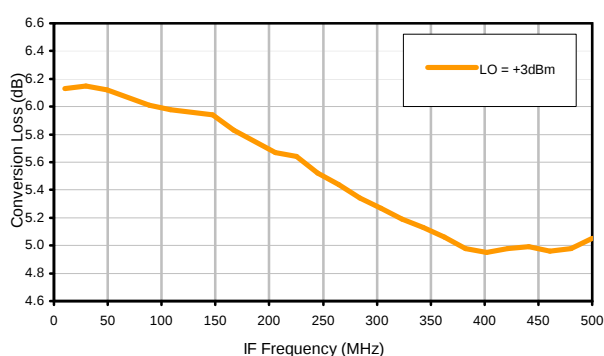


Conversion Loss vs. IF @ RF=400.1MHz

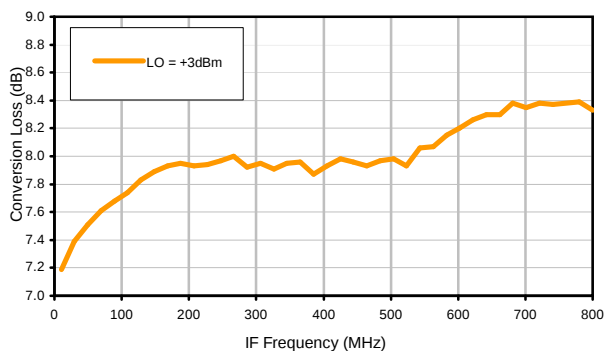


Conversion Loss vs. IF @ RF=1400.1MHz

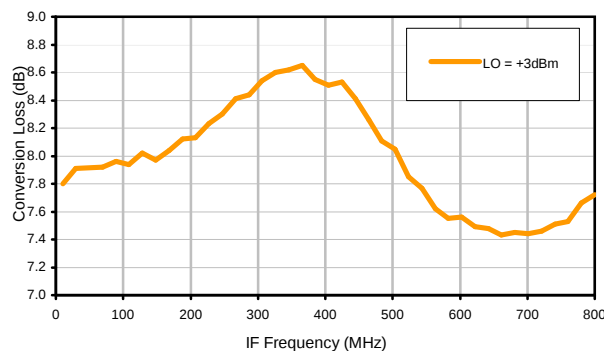

IP3 Input

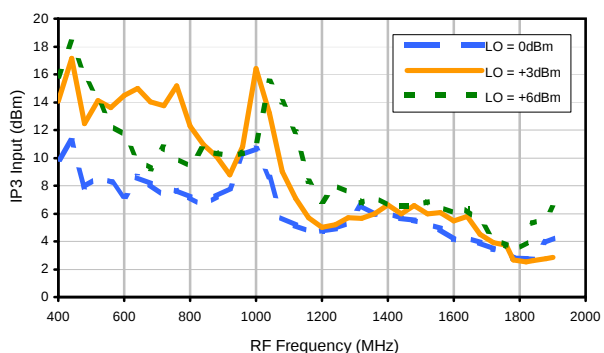

Compression @ RF IN=-3dBm

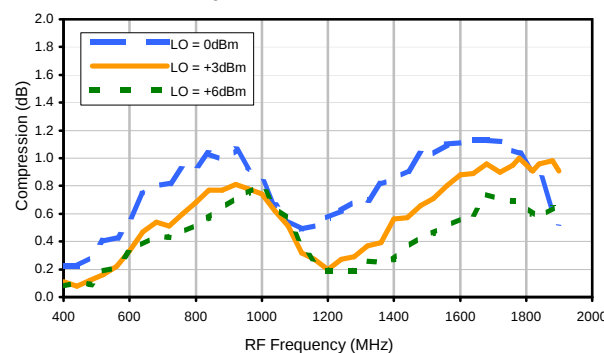

REV. X2

RMS-5L+

100818

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

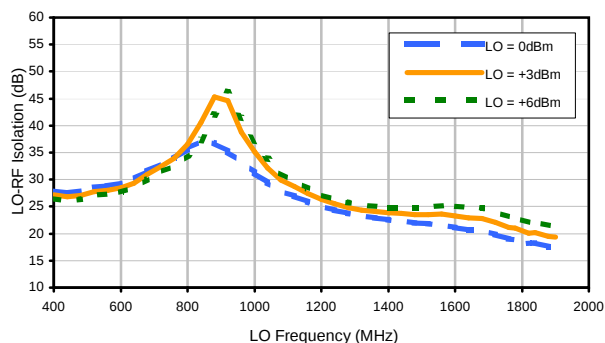


LO-IF Isolation

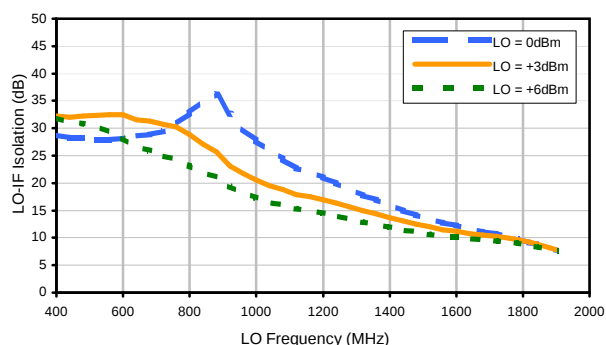


RF-IF Isolation

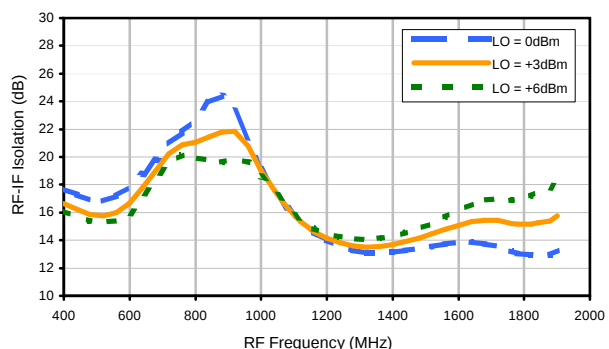


RF VSWR

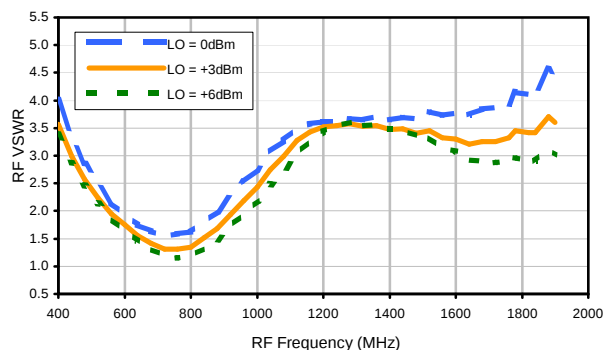

LO VSWR

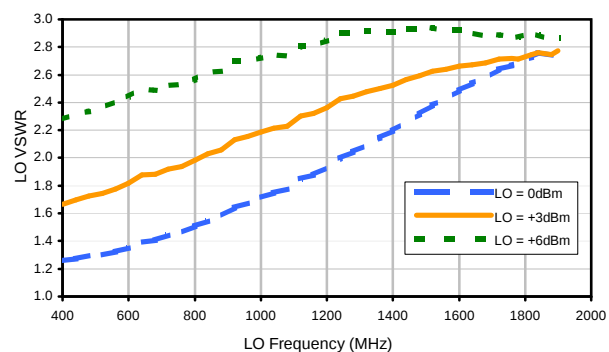

IF VSWR

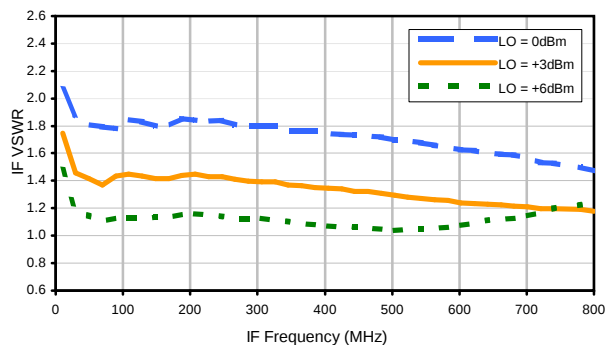

REV. X2

RMS-5L+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+5	4	11	21	22	39	40	54	50	60
1	-	15	+0	25	19	38	39	43	51	55	70	67
2	112	43	33	48	35	47	55	57	72	70	71	85
3	117	76	59	61	59	65	66	73	83	73	89	84
4	116	91	94	83	78	77	74	88	87	87	93	91
5	115	96	95	102	85	90	77	91	92	110	97	99
6	109	105	111	94	100	89	90	77	84	90	95	100
7	108	100	99	100	97	97	105	89	92	83	92	100
8	120	97	99	108	98	98	99	103	92	85	86	103
9	109	98	102	95	112	102	99	100	94	88	95	94
10	124	94	102	92	106	107	94	106	100	102	88	86
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 900.1 MHz; -18.00 dBm.
LO IN: 930.01 MHz; +3.00 dBm
IF OUT: 29.91 MHz; -24.36 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	16	22	35	33	52	53	64	66	73
1	-	15	+0	26	21	41	43	54	56	68	72	77
2	99	33	25	38	26	38	49	50	64	71	72	85
3	116	54	41	40	43	59	48	58	61	59	75	73
4	111	58	65	61	63	53	60	56	66	68	83	83
5	110	69	67	73	57	55	58	59	69	68	86	72
6	107	88	79	69	86	75	61	65	67	68	81	80
7	122	101	89	86	82	97	73	73	69	74	82	80
8	105	103	111	99	94	84	93	89	75	76	81	81
9	113	109	103	124	98	94	87	97	88	82	81	89
10	107	113	108	109	110	106	108	108	111	97	94	87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER


Test conditions: RF IN: 900.1 MHz; -8.00 dBm.
LO IN: 930.01 MHz; +3.00 dBm
IF OUT: 29.91 MHz; -14.49 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X2
RMS-5L+
100818
Page 3 of 3



Outline Dimensions

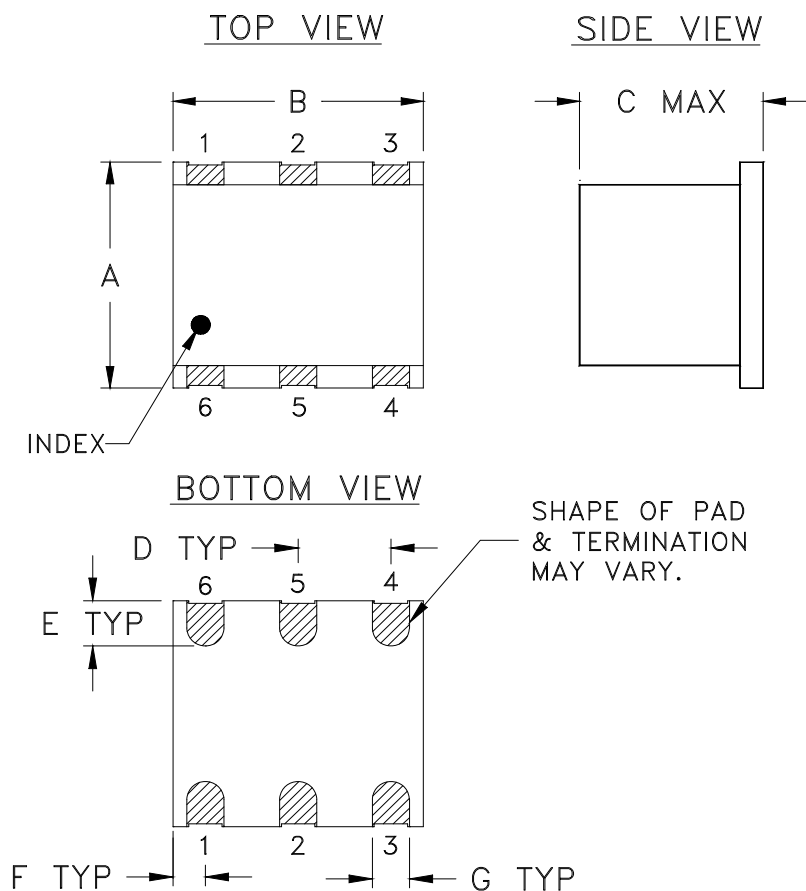

PCB Land Pattern

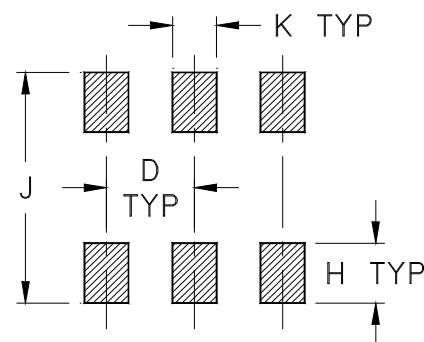

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
TT240	.250 (6.35)	.31 (7.87)	.20 (5.08)	.100 (2.54)	.050 (1.27)	.055 (1.40)	.040 (1.02)	.070 (1.78)	.270 (6.86)	.050 (1.27)	.50

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: 2-10 μ inch (.05-.25 microns) Gold plate over 100-300 μ inch (2.54-7.62 microns) Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

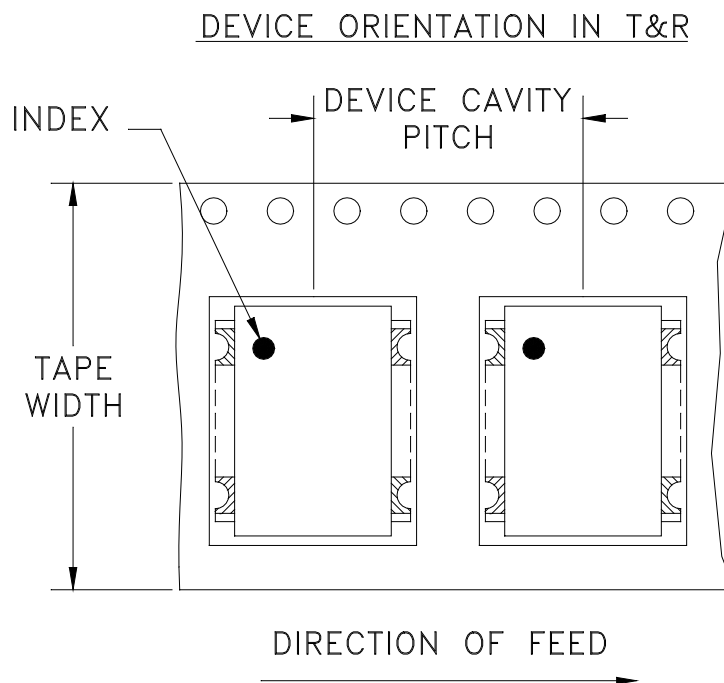

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500
			1000

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

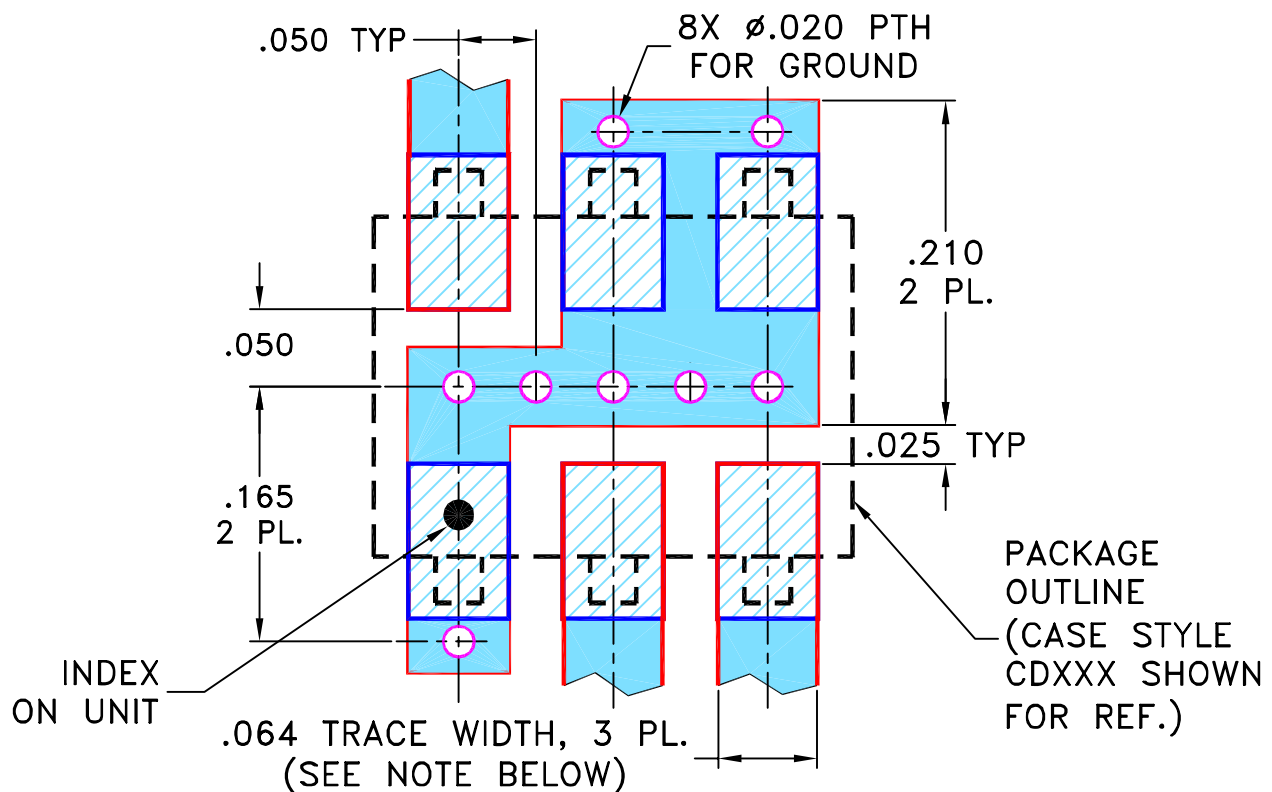

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:

1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT



TB-03

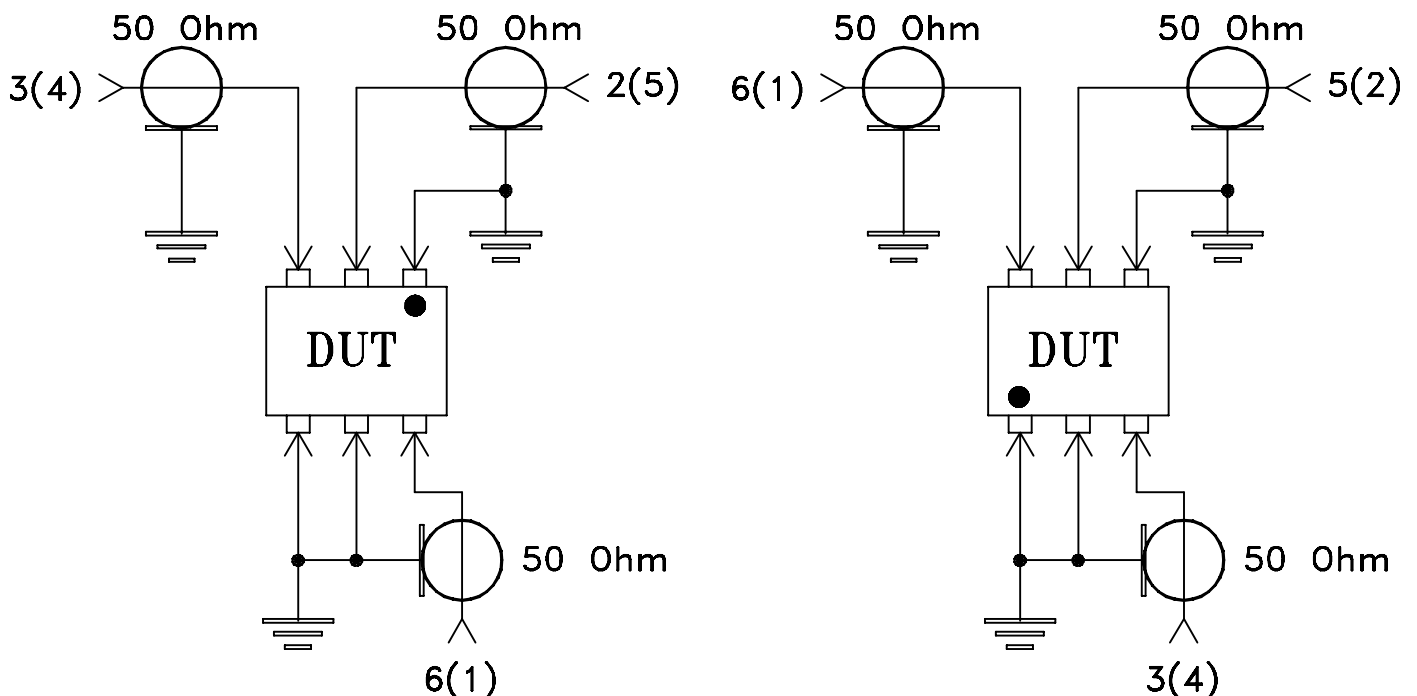

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215