

TM08P04S

P-Channel Enhancement Mosfet

General Description

- Low $R_{DS(ON)}$
- RoHS and Halogen-Free Compliant

Applications

- Load switch
- PWM


General Features

$V_{DS} = -40V$ $I_D = -7.8A$

$R_{DS(ON)} = 32 m\Omega @ V_{GS} = -10V$

100% UIS Tested

100% R_g Tested

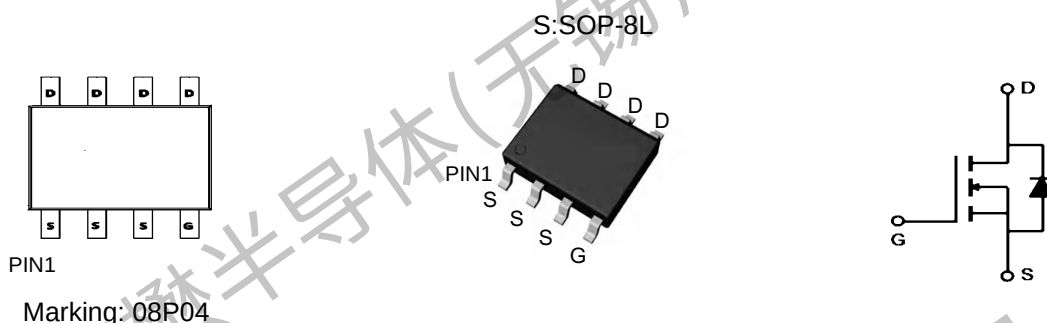

Absolute Maximum Ratings ($T_A = 25^\circ C$ Unless Otherwise Noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-40	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_A = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	-7.8	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	-5.7	A
I_{DM}	Pulsed Drain Current	-30	A
EAS	Single Pulse Avalanche Energy	36	mJ
$P_D @ T_A = 25^\circ C$	Total Power Dissipation	3.1	W
T_{STG}	Storage Temperature Range	-55 to 175	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 175	$^\circ C$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient	---	80	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case	---	25	$^\circ C/W$







P-Channel Enhancement Mosfet

Electrical Characteristics: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250 μA	-40	---	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{GS} =0V, V _{DS} =-32V, T _J =25℃	---	---	-1	μA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V, V _{DS} =0A	---	---	±100	nA
On Characteristics						
V _{GS(th)}	GATE-Source Threshold Voltage	V _{GS} =V _{DS} , I _D =250 μA	-1.4	-1.75	-2.0	V
R _{DS(ON)}	Drain-Source On Resistance	V _{GS} =-10V, I _D =-6A	---	32	41	mΩ
		V _{GS} =-4.5V, I _D =-3A	---	42	58	
G _{FS}	Forward Transconductance	V _{DS} =-5V, I _D =-6A	---	12	---	S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz	---	1004	---	pF
C _{oss}	Output Capacitance		---	108	---	
C _{rss}	Reverse Transfer Capacitance		---	80	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DS} =-15V, V _{GS} =-10V I _D =-1A, R _{GEN} =3.3Ω	---	19.2	---	ns
t _r	Rise Time		---	12.8	---	ns
t _{d(off)}	Turn-Off Delay Time		---	48.6	---	ns
t _f	Fall Time		---	4.6	---	ns
Q _g	Total Gate Charge	V _{DS} =-20V, V _{GS} =-4.5V, I _D =-6A	---	9	---	nC
Q _{gs}	Gate-Source Charge		---	2.54	---	nC
Q _{gd}	Gate-Drain “Miller” Charge		---	3.1	---	nC
Drain-Source Diode Characteristics						
V _{SD}	Source-Drain Diode Forward Voltage	V _{GS} =0V, I _S =-1A, T _J =25℃	---	---	-1	V
LS	Continuous Source Current	V _G =V _D =0V, Force Current	---	---	-7.8	
LSM	Pulsed Source Current		---	---	-15	



Typical Characteristics: ($T_C=25^\circ\text{C}$ unless otherwise noted)

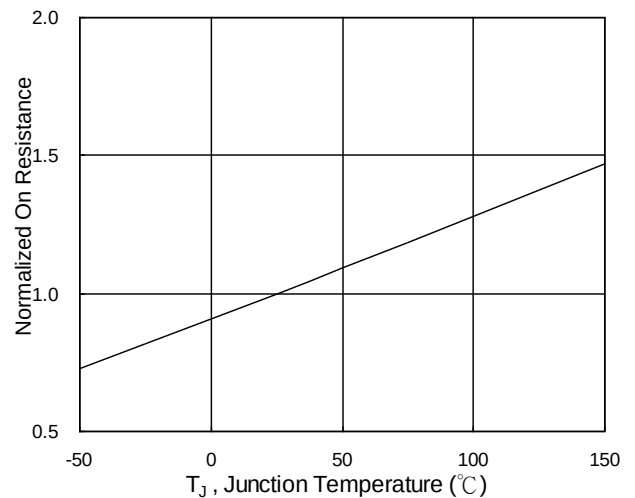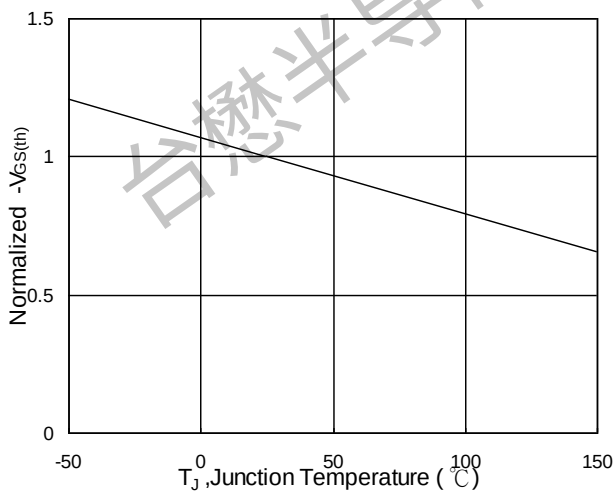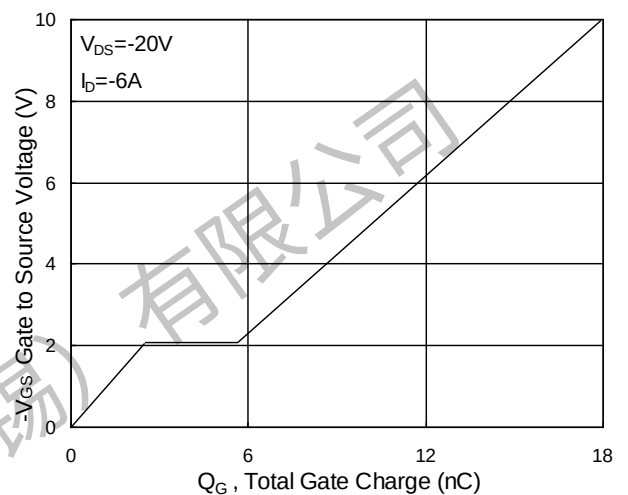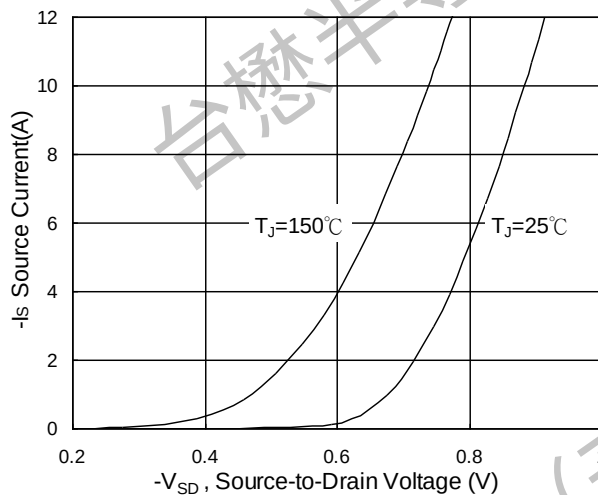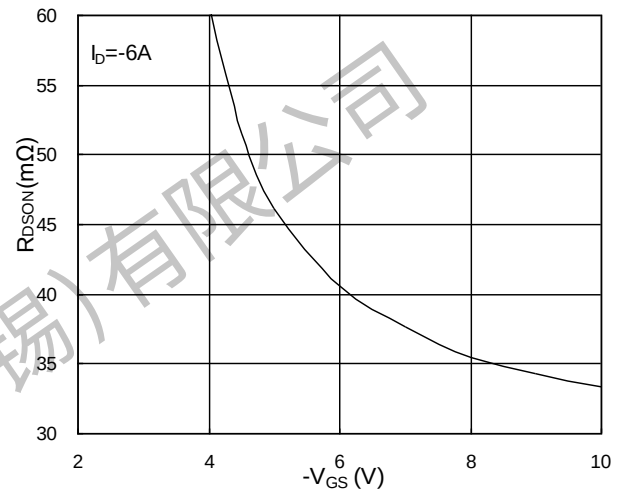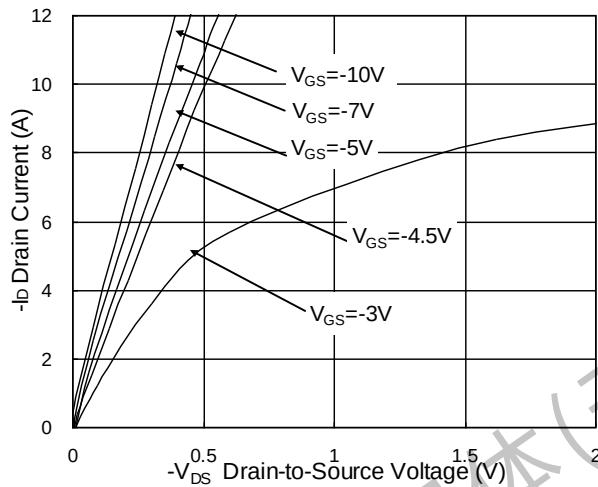

TM08P04S

P-Channel Enhancement Mosfet

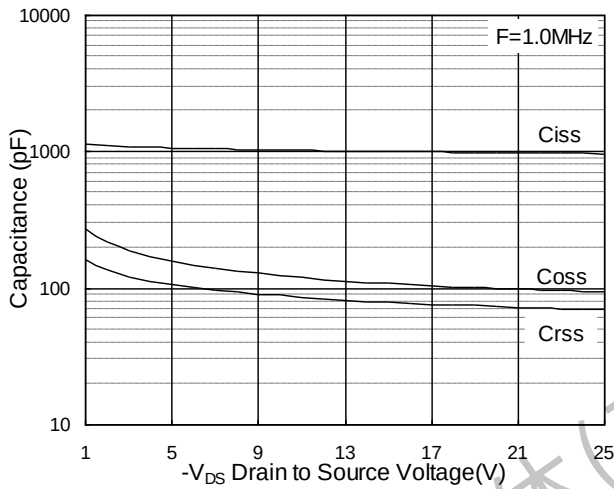


Fig.7 Capacitance

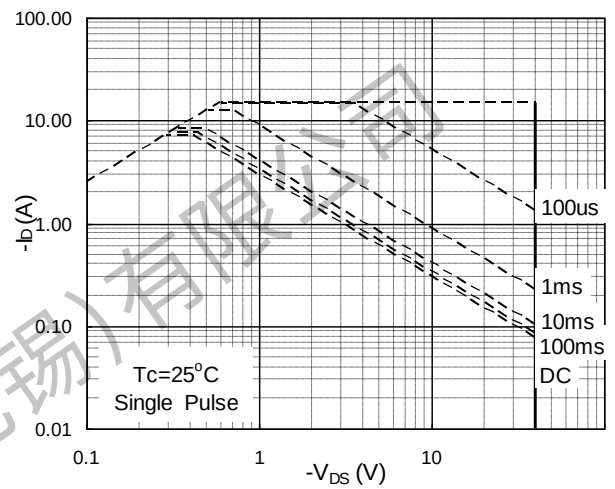


Fig.8 Safe Operating Area

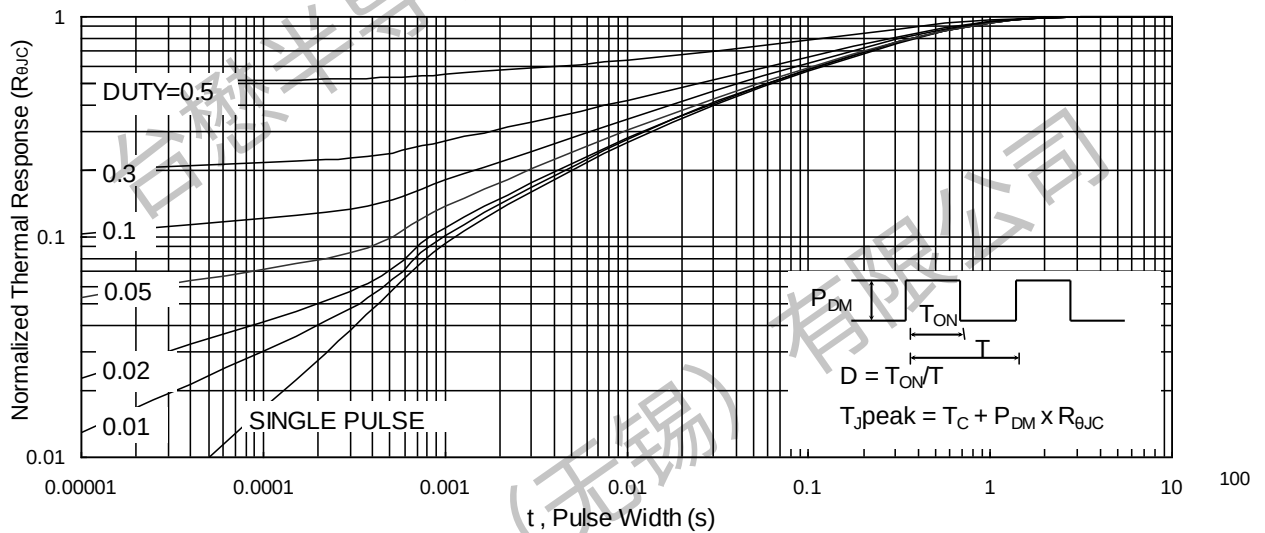


Fig.9 Normalized Maximum Transient Thermal Impedance

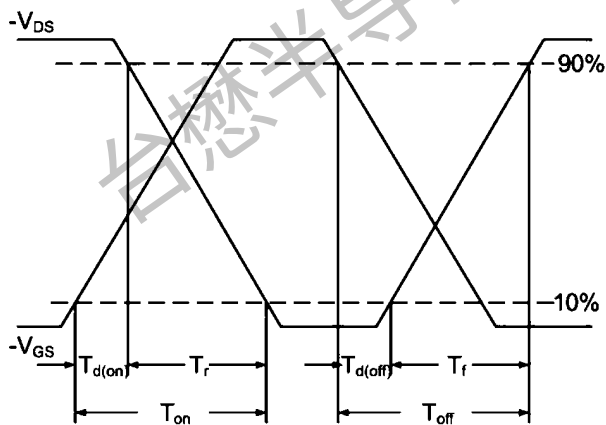


Fig.10 Switching Time Waveform


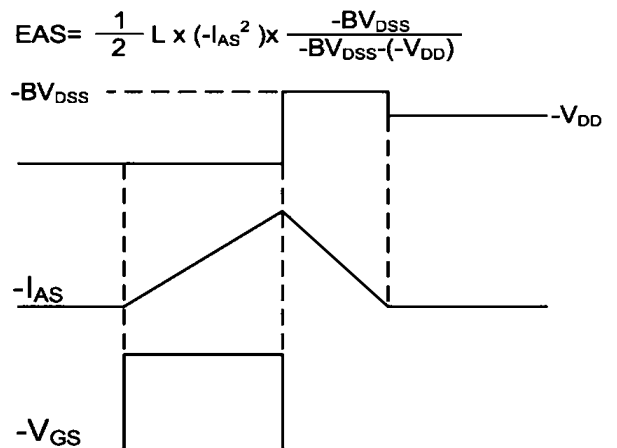


Fig.11 Unclamped Inductive Waveform


TM08P04S

P-Channel Enhancement Mosfet

Package Mechanical Data: SOP-8L

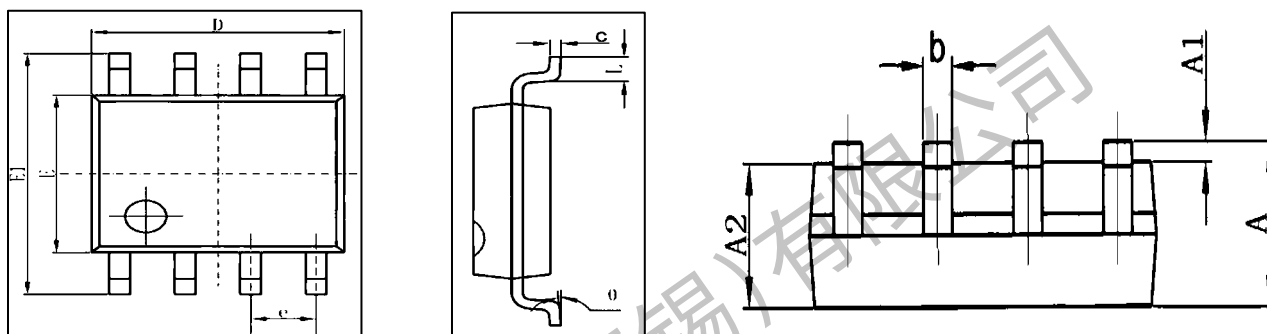


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

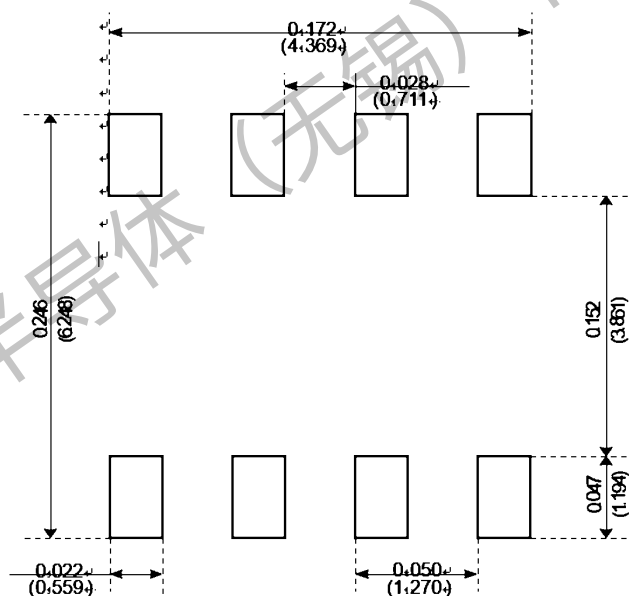

Recommended Minimum Pads

SOP-8L Embossed Carrier Tape

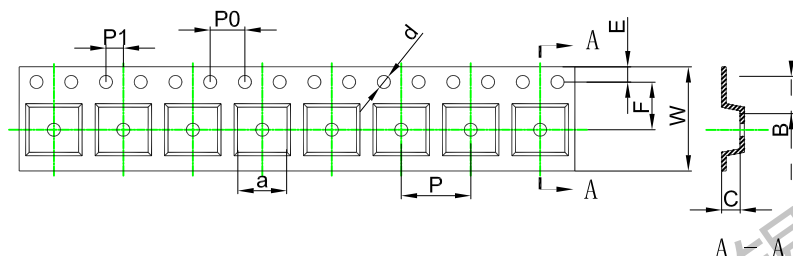


Packaging Description:

SOP-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2,500 units per 13" or 33cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


ALL DIM IN mm

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
SOP-8L	6.40	5.40	2.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

SOP-8L Tape Leader and Trailer

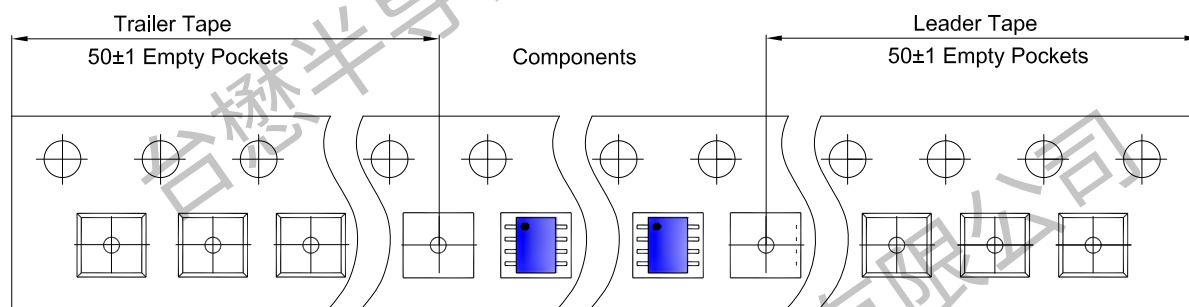

SOP-8L Reel

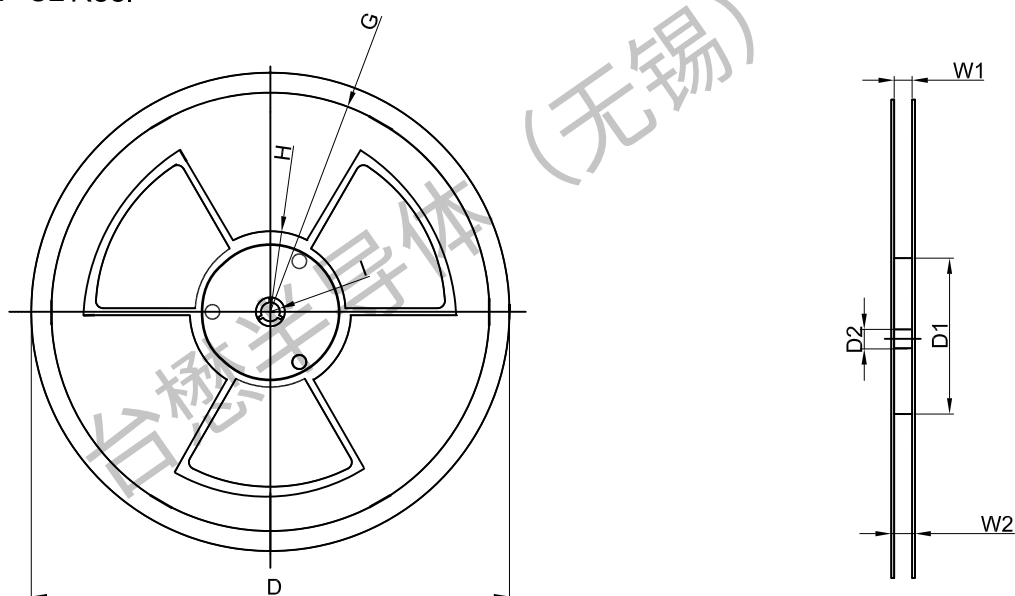

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
13"Dia	Ø330.00	100.00	13.00	R135.00	R55.00	R6.50	12.00	14.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3,000 pcs	13 inch	6,000 pcs	370×355×52	48,000 pcs	400×360×368	

Important Notices and Disclaimers

- Tritech-MOS Technology Corp. reserves the right to change this document, its products, and specifications at any time without prior notice.
- Before final design, purchase, or use, customers should obtain and confirm the latest product information and specifications.
- Tritech-MOS Technology Corp. makes no warranties, representations or warranties regarding the suitability of its products for any specific purpose, and Tritech-MOS Technology Corp. does not assume any responsibility for application assistance or customer product design.
- Tritech-MOS Technology Corp. does not guarantee or assume any responsibility for the purchase or use of any unexpected or unauthorized products.
- Any intellectual property rights of Tritech-MOS Technology Corp. are not licensed through implicate or other means.
- Products of Tritech-MOS Technology Corp. are not included as critical components in life support equipment or systems without explicit written approval from Tritech-MOS Technology Corp.

Revision history:

Date	Rev	Description	Page
2024.05.13	24.05	Original	