

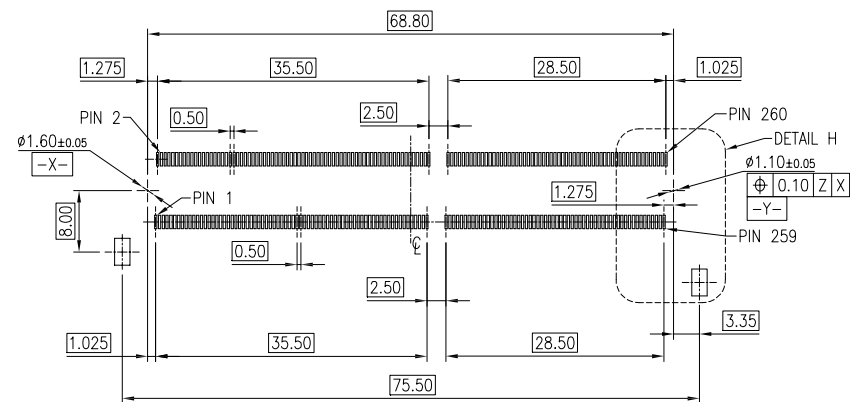
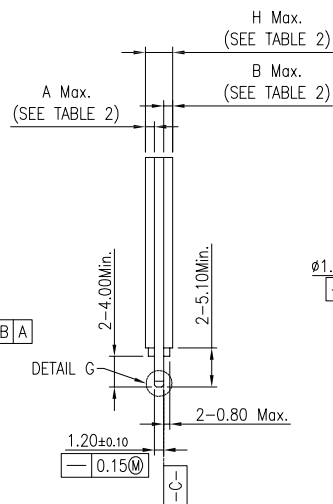
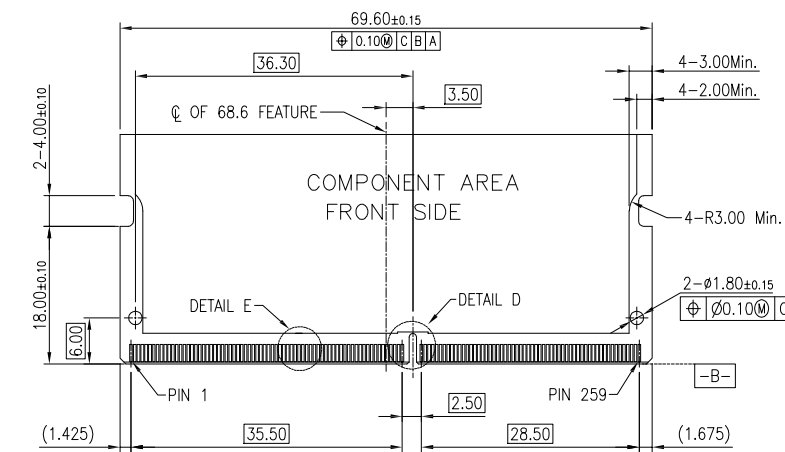
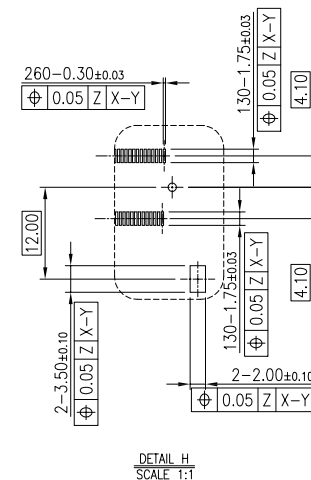






RECOMMEND P.C.BOARD LAYOUT
PCB THICKNESS 0.80mm Min.
PCB LAYOUT GENERIC TOLERANCE:±0.05
([-Z-]:PCB SURFACE)

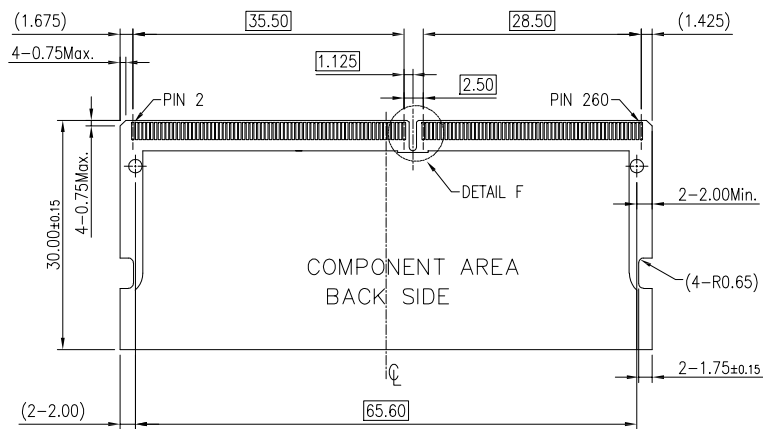

RECOMMEND MODULE CONFIGURATION

TABLE 2

4.70	1.70	1.70	10.50	4.90
3.70	1.20	1.20	10.00	5.40
DIM. H	DIM. A	DIM. B	DIM. C	DIM. D

TOLERANCE		 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED	
LINEAR	ANGLES		
X,±0.40	X°,± 3°		
.X,±0.30	.X°,±	APPD: Jason	MAT'L:
.XX,±0.20	.XX°,±	CHKD: Schumi	FINISH:
.XXX,±0.10	.XXX°,±	DRWN: Lei Songping	Q'TY:

TITLE: DDR4 SODIMM 9.2H 260PIN REVERSE G/F TYPE.				
PART NO. D4260-9201RR				
DWG NO. C-D4260-92R				
	UNITS	SCALE	SHEET	REV
	MM	1 : 1	2 OF 2	A0