

1420957

https://www.phoenixcontact.com/us/products/1420957

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Flush-type connector, 3-position, Socket, straight, 7/8"-16UNF, on free cable end, Front mounting, with 1/2 inch-14 NPT mounting thread, Individual wires, cable length: 1 m, 2.50 mm², PVC litz wire

Commercial data

Item number	1420957
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF14
Product key	BF2ICA
GTIN	4055626403595
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	MX



1420957

https://www.phoenixcontact.com/us/products/1420957

Technical data

Notes

_			
Trad	Δ	ractr	iction

CE note	The products are offered exclusively for export outside the EU	
	and the European Economic Area.	

Mounting

Mounting type	Front mounting, with 1/2 inch-14 NPT mounting thread

Product properties

Product type	Circular connectors (device side)
Number of positions	3
No. of cable outlets	1
Shielded	no
Insulation characteristics	
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V-0
Housing surface material	Al anodized
Contact material	Copper alloy
Contact surface material	Au
Contact carrier material	PVC
Material for screw connection	Anodized aluminum

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	600 V AC
	600 V DC
Nominal current I _N	23.5 A (UL 2238)
	7 A (UL 2237)

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	2.5 mm ²
Tightening torque	10 lb _F in.
	1.12 Nm

Mechanical properties



1420957

https://www.phoenixcontact.com/us/products/1420957

Mec	hanical	l data

Insertion/withdrawal cycles	> 500
-----------------------------	-------

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	7/8"-16UNF

Connection 2

Head design	free cable end	

Cable/line

Cable length	1 m
Cable type	PVC litz wire
Wire diameter incl. insulation	4.5 mm
Single wire, color	green 1, black 2, white 3
Cable cross section	2.5 mm²
Conductor structure signal line	41 x AWG 30
AWG signal line	14
Material wire insulation	PVC
Thickness, insulation	Core insulation

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP68
	IP68
Ambient temperature (operation)	-20 °C 80 °C (Plug)
	-20 °C 80 °C (cable, fixed installation)

Standards and regulations

Standard designation	7/8" connector
Note	Suitable for use in Class I, Division 2 Groups A, B, C, D hazardous locations according to ISA standard 12.12.01-2015, section 8.2 and 8.8.3




1420957

https://www.phoenixcontact.com/us/products/1420957


Drawings

Dimensional drawing



Housing cutout

Schematic diagram




Pin assignment, socket, 7/8"-16UNF, 3-pos., view of female side (reference image)




1420957

https://www.phoenixcontact.com/us/products/1420957

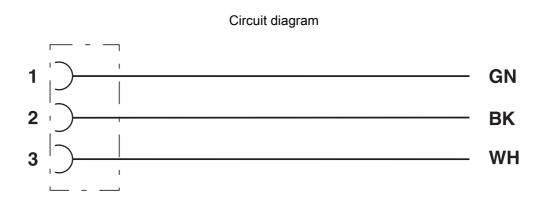

Dimensional drawing

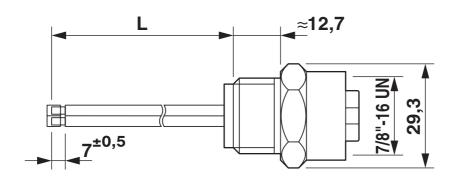

7/8" flush-type socket



1420957

https://www.phoenixcontact.com/us/products/1420957

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1420957



UL Listed

Approval ID: FILE E 221474



cUL Listed

Approval ID: FILE E 221474

cULus Listed



1420957

https://www.phoenixcontact.com/us/products/1420957

Classifications

ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

UNSPSC

UNSPSC 21.0	39121413	



1420957

https://www.phoenixcontact.com/us/products/1420957

Environmental product compliance

	RoHS
ᆫ	110110

20 110110	
Fulfills EU RoHS substance requirements Not applicable, Not qualified for the European market	
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1420957

https://www.phoenixcontact.com/us/products/1420957

Accessories

SACC-1/2 NPT-LOCKNUT - Lock nut

1020362

https://www.phoenixcontact.com/us/products/1020362

Locknut, 1/2 inch-14 NPT thread



SACC-MIN-SEAL - Seal

1020363

https://www.phoenixcontact.com/us/products/1020363

Seal for MINI 7/8-inch panel feed through with 1/2 inch-14 NPT thread



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com