



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	-	29AUG07	BSV	-
	C	REVISED PER ECO-17-002209	13APR2017	RS	MM

D



C

B

A

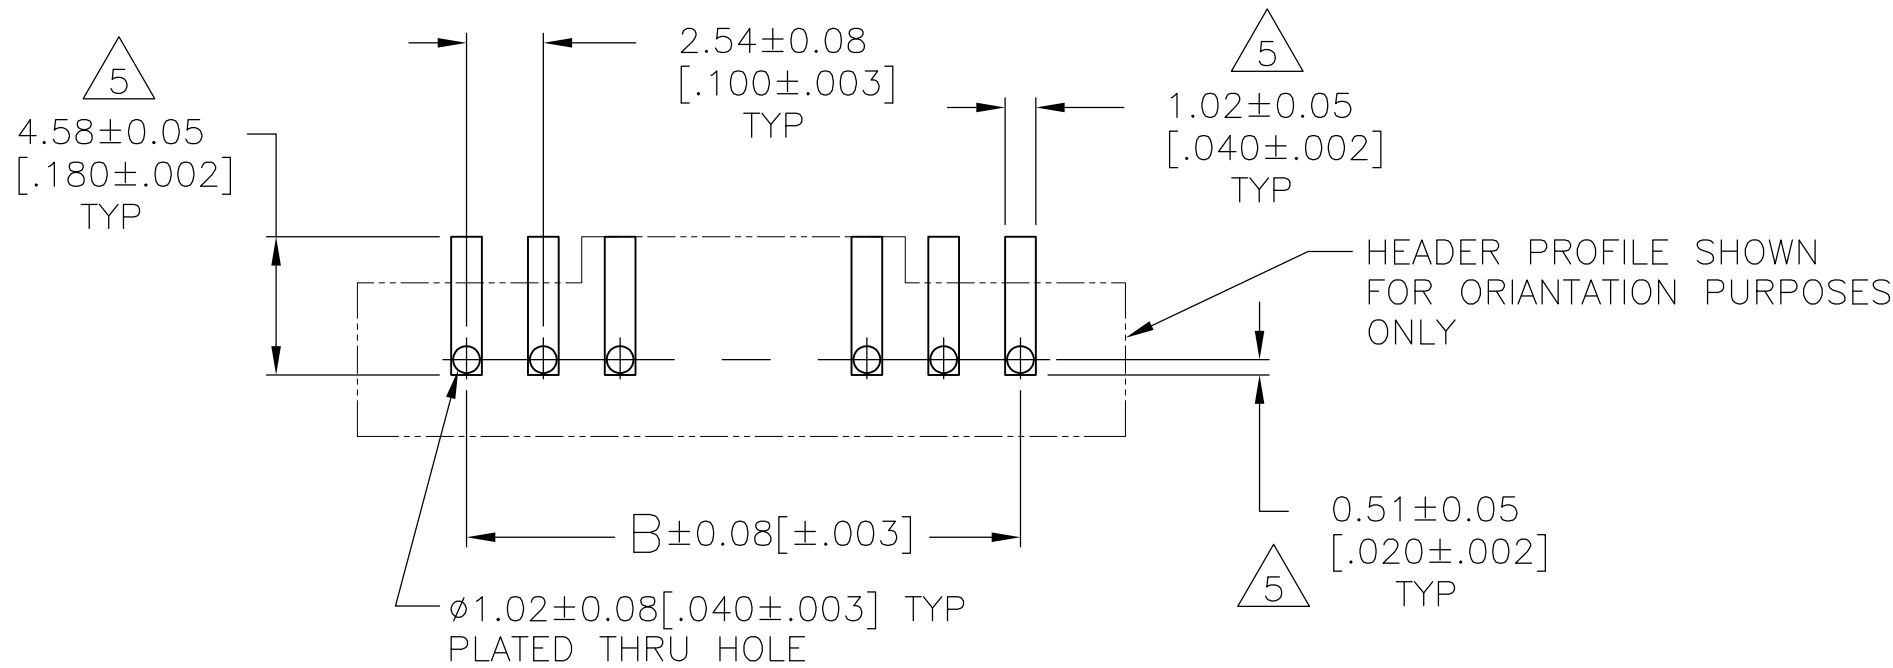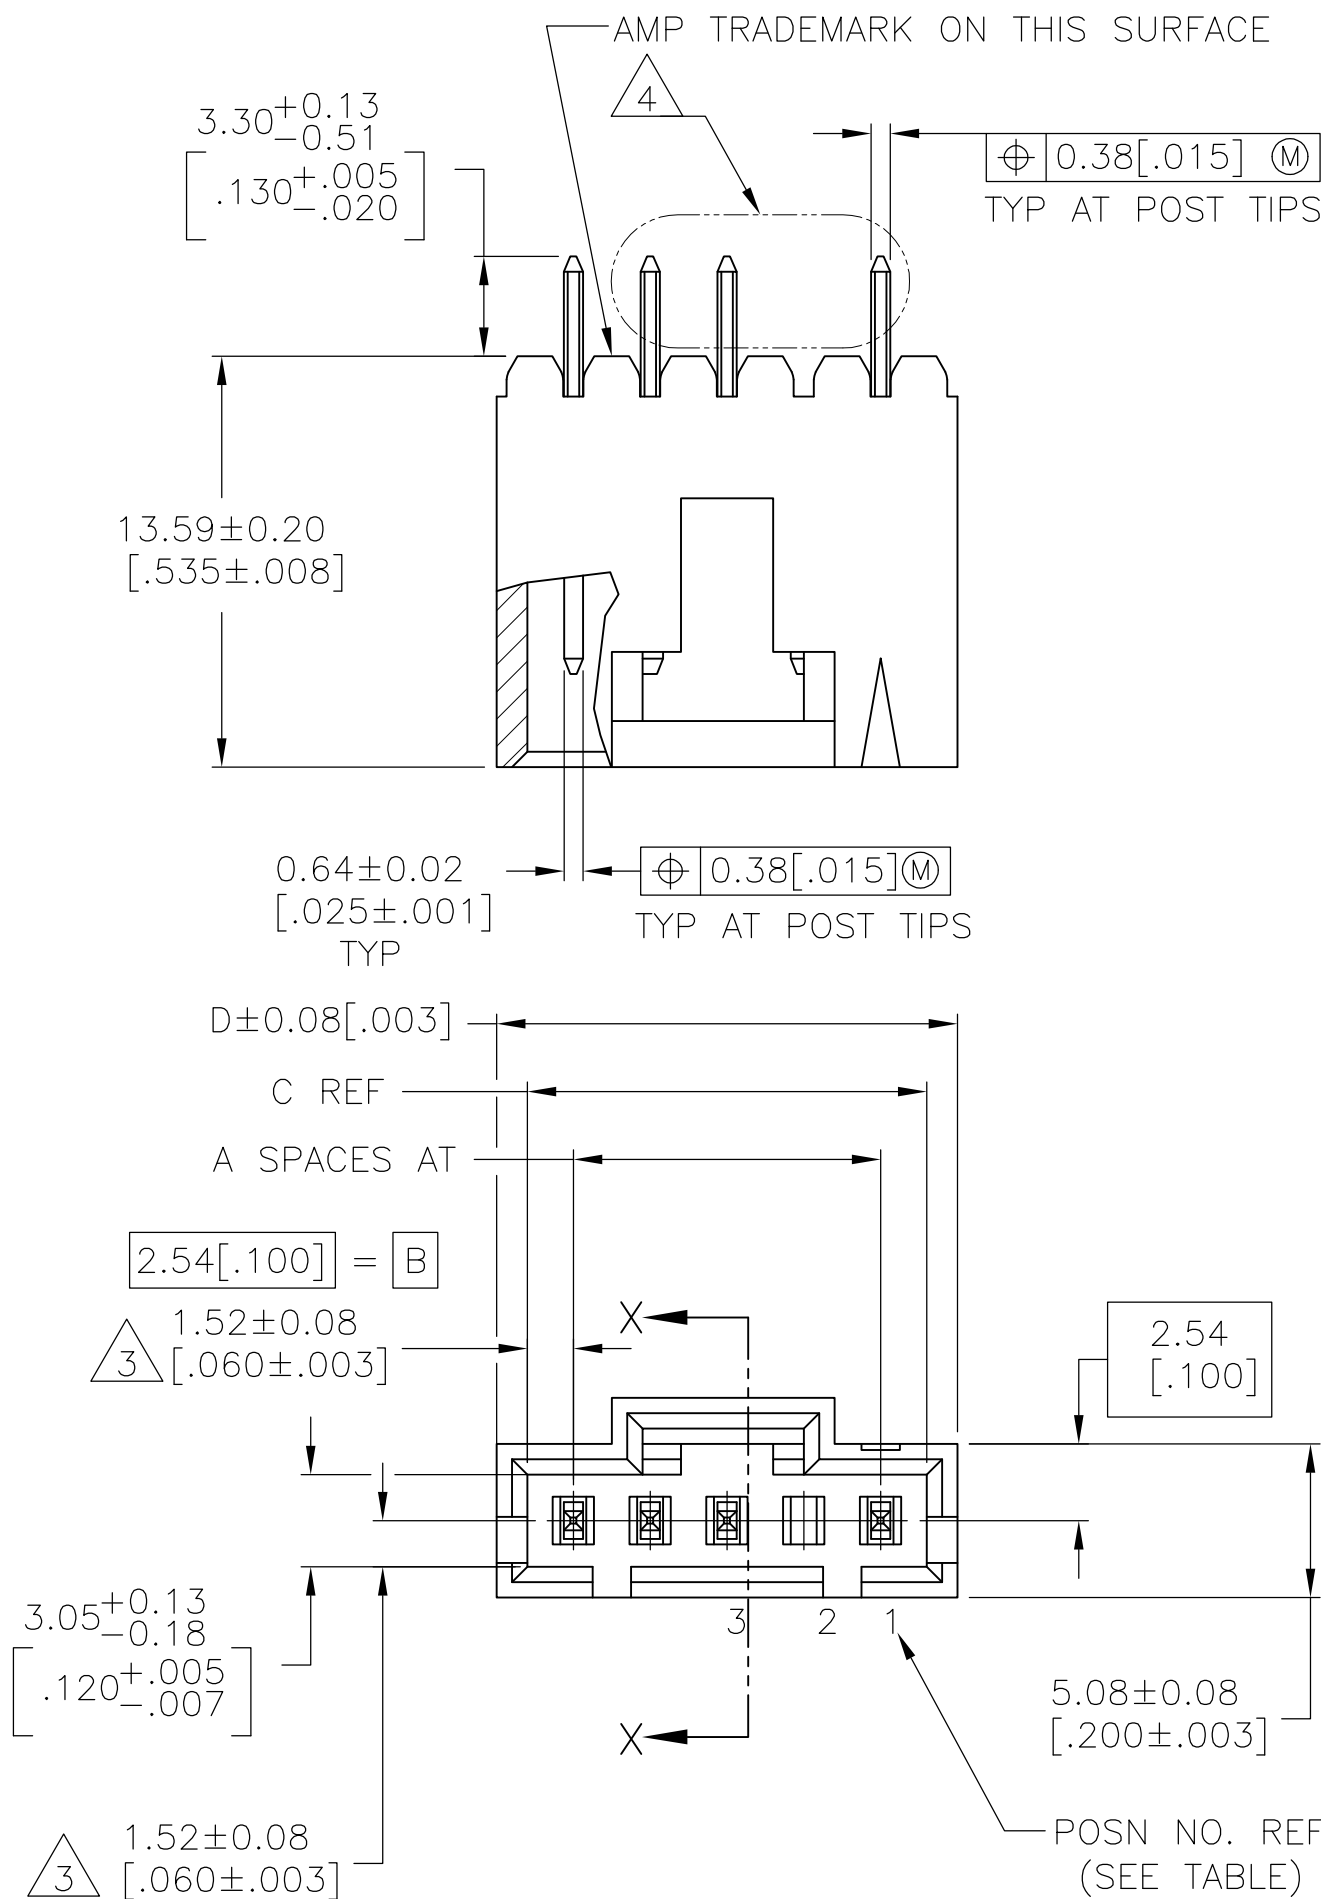

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
RECOMMENDED STENCIL THICKNESS = 0.25[.010]

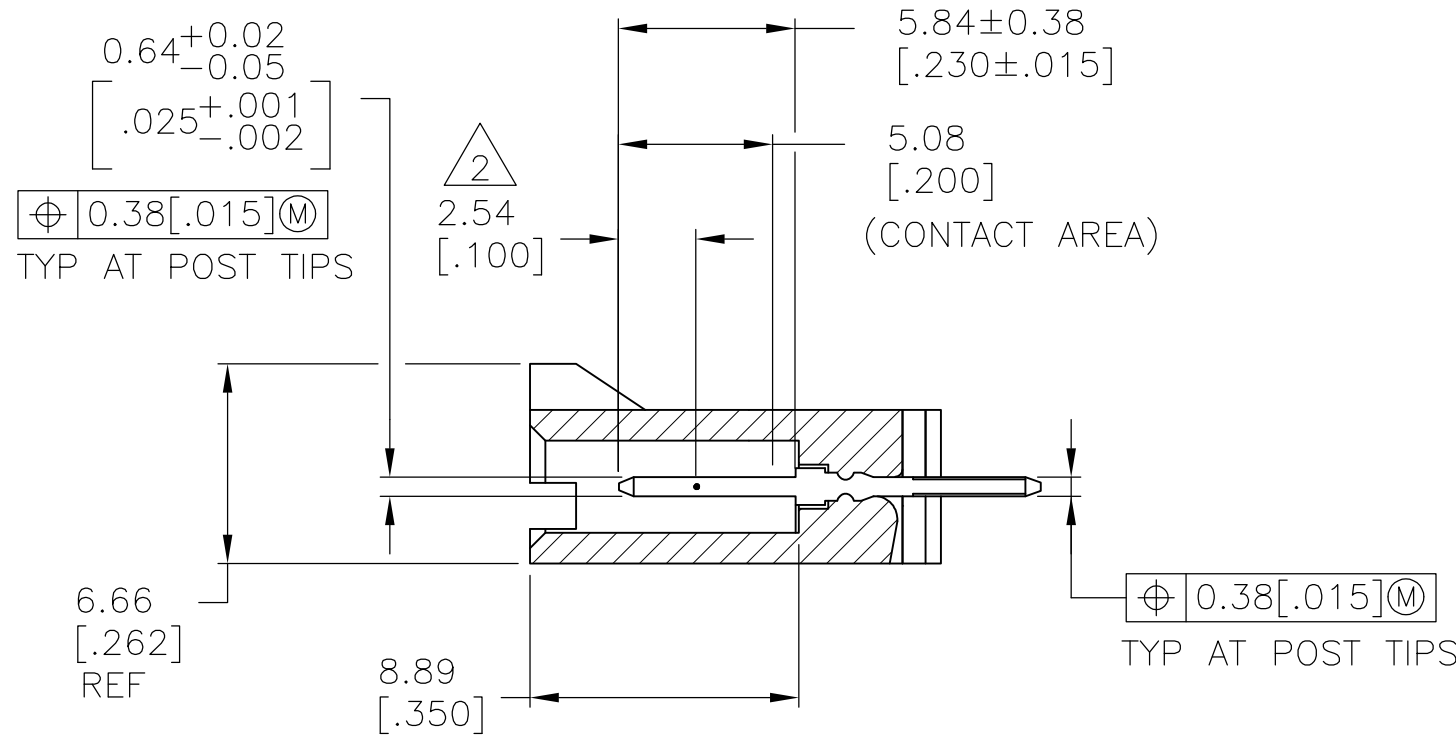

SECTION X-X

- 1 0.00254[.000100] BRIGHT TIN
OVER 0.00127[.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 THE NOTED DIMENSIONS APPLY FROM THE BASIC
DIMENSION LINE (NOT THE POST CENTERLINE)
TO THE SURFACE INDICATED
- 4 SELECT POST TAILS FORMED TO PROVIDE CONNECTOR
HOLD DOWN UNTIL SOLDERED, CONFIGURATION
ACCEPTS 0.69-2.03[.027-.080] THICK PRINTED
CIRCUIT BOARD (SEE DETAIL Z)
- 5 DIMENSIONS NOTED ARE FOR SOLDER
STENCIL LAYOUT FOR USE WITH 1.57±0.20 [.062±.008]
THICK PRINTED CIRCUIT BOARDS.
- 6 PARTS ARE PACKAGED IN GANG OF TUBES

2	15.11 [.595]	13.21 [.520]	10.16 [.400]	4	5	104916-1
POST NUMBER OMITTED	D	C	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN E. BRANDBERG 200CT94	TE Connectivity		
DIMENSIONS: mm [INCHES]			CHK J. GESFORD 200CT94			
			APVD D. DUPLER 200CT94	NAME		
			PRODUCT SPEC	HEADER ASSY, AMPMODU MTE, VERTICAL SINGLE ROW , 2.54[.100]CL, 0.64[.025] SQ POSTS, POLARIZED, WITH LATCHING & HOLD DOWN, HIGH TEMP, SELECT LOAD		
MATERIAL HOUSING: HIGH : LCP COLOR : BLACK POSTS : COPPER ALLOY			APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
FINISH			WEIGHT	A2	00779	C=104916
POST: 1			CUSTOMER DRAWING	SCALE	4:1	SHEET 1 of 1
				REV	C	