

SPECIFICATIONS OF CITILED

1 / 10

1. Scope of Application

These specifications apply to chip type LED lamp, CITILED, model CL-L270-2MU1D-T.

2. Part code

C L - L 2 7 0 - 2 M U 1 D - T

Series

270 : White LED for general lighting.

Quantity of dies

2 : 2Dies.

Special specifications

M : General Color Rendering Index Typ.85 type.

Watt Class

U1 : Under 1 watt package.

Lighting Color

D : White color

Shipping mode

Non-coded : Bulk


T : Taping (standard)

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description Appro.	CITIZEN ELECTRONICS CO.,LTD.				

Ref.CE-P548 03/10 R1(0310)

3. Outline drawing

Unit: mm
Tolerance: ± 0.1

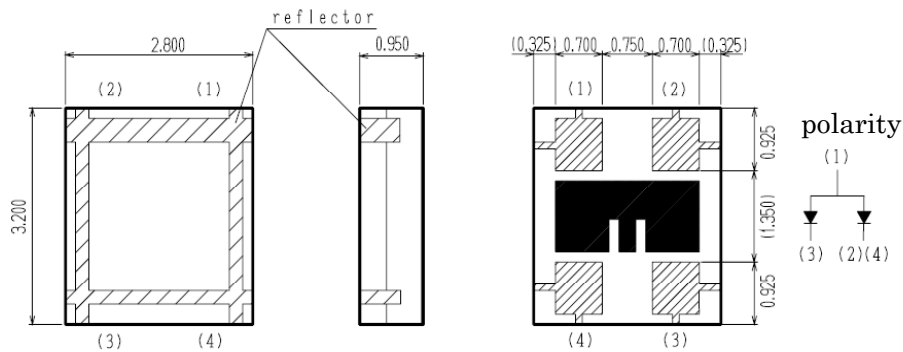

4. Performance

(1) Absolute Maximum Rating

Parameter	Symbol	Rating Value	Unit
Power Dissipation	P_d	296	mW
Forward Current	I_F	80	mA
Forward Pulse Current *	I_{FP}	100 *	mA
Reverse Voltage	V_R	5	V
Operating Temperature	T_{op}	-30 ~ +85	°C
Storage Temperature	T_{st}	-40 ~ +100	°C
Junction Temperature	T_{jmax}	120	°C

*Duty $\leq 1/10$, Pulse width ≤ 0.1 sec

* $T_j = T_C + R_{j-s} \times P_d$ (D.C.driving) * T_C : Temperature of Solder terminal(4)

(2) Electro-optical Characteristic

($T_C = 25^\circ\text{C}$)

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Forward Voltage	V_F	$I_F = 60\text{mA}$	3.1	3.35	3.7	V
Reverse Current	I_R	$V_R = 5\text{V}$	-	-	100	μA
Luminous Intensity *1	I_V	$I_F = 60\text{mA}$	5.11	6.83	8.53	cd
Thermal resistance	R_{j-s}	junction-solder	-	76	-	°C/W
Luminous Flux	ϕ_v	$I_F = 60\text{mA}$	-	(17.0)	-	lm
General Color Rendering Index	R_a *2	$I_F = 60\text{mA}$	80	85	-	-

*1In accordance with NIST standard The values are based on 2-dies performance

*2[CIE13.3-1995]


			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description	Appr.	CITIZEN ELECTRONICS CO.,LTD.			

SPECIFICATIONS OF CITILED

3 / 10

Chromaticity coordinates (Condition : $I_F=60\text{mA}$, $T_C=25^\circ\text{C}$)

Color Rank	x	y
1	0.307	0.316
	0.310	0.302
	0.315	0.307
	0.313	0.325
2	0.315	0.307
	0.313	0.325
	0.325	0.344
	0.326	0.317
3	0.326	0.317
	0.325	0.344
	0.331	0.353
	0.331	0.322

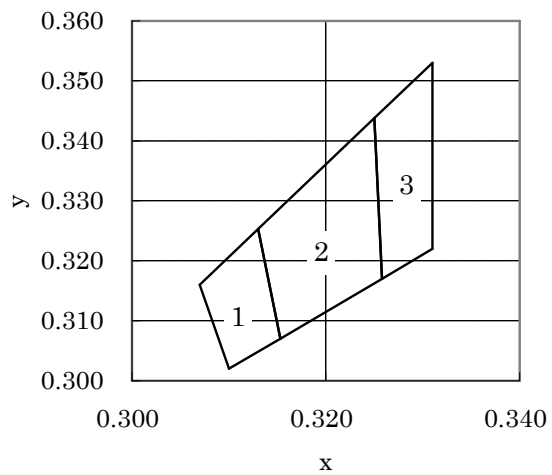

Ranking(Condition: $I_F=60\text{mA}$, $T_C=25^\circ\text{C}$)

Parameter	Symbol	Rank	Min	Max	Unit
Forward Voltage	V_F	Q	3.10	3.30	V
		R	3.30	3.50	
		S	3.50	3.70	
Luminous Intensity	I_V	B	5.11	6.31	cd
		C	6.31	7.34	
		D	7.34	8.54	

Note 1) The tolerance of forward voltage(V_F) measurement is $V_F \pm 3\%$ at our tester

Note 2) The tolerance of luminous Intensity(I_V) measurement is $\pm 10\%$ at our tester






Note 3) The tolerance of Chromaticity coordinates (x,y) measurement is ± 0.01 at our tester

Measurement Conditions

- 1) Chip is mounted on board(size 100mm×40mm)
- 2) Board material is FR-4, covered with green color resist and thickness of copper is 18μm.

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10 K.Funakubo	19.Mar.'10 K.Sasuga	19.Mar.'10 T.Wada	Name	CL-L270-2MU1D
						Drawing No	
Mark	Date	Description Appro.				CITIZEN ELECTRONICS CO.,LTD.	

5. Characteristic

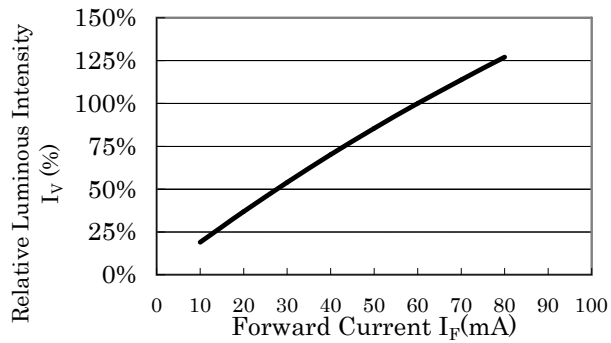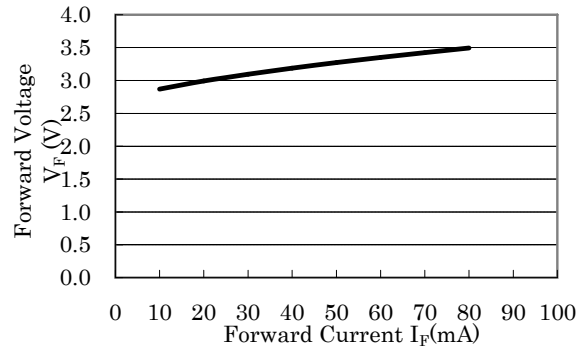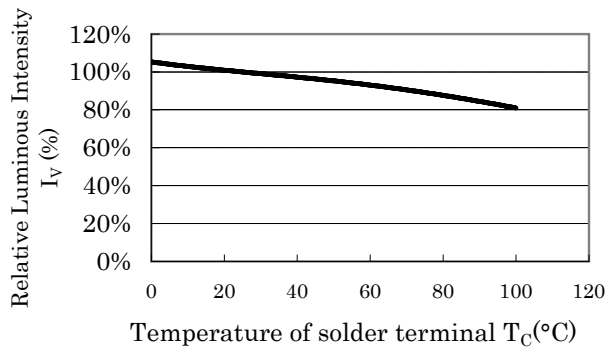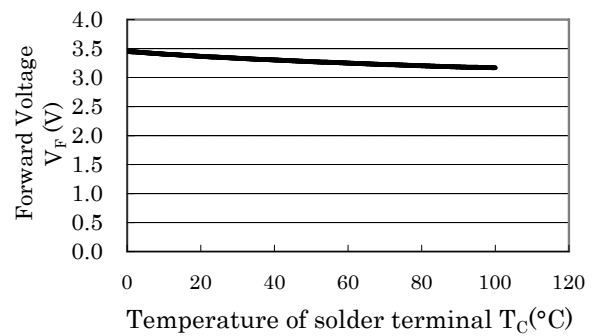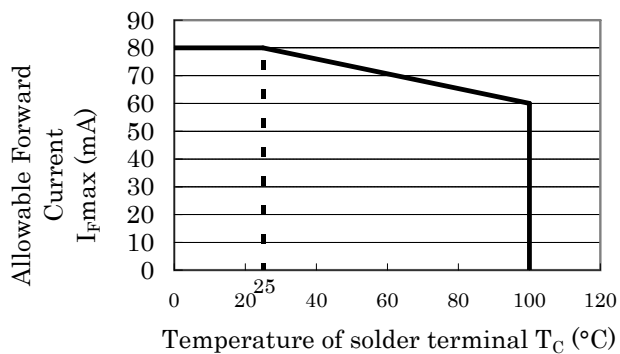 I_F - I_V Characteristic $T_C=25^\circ\text{C}$  I_F - V_F Characteristic $T_C=25^\circ\text{C}$  T_C - I_V Characteristic $I_F=60\text{mA}$  T_C - V_F Characteristic $I_F=60\text{mA}$  T_C - I_{Fmax} Characteristics

<Condition>

Chip on board

board size:100mm*40mm


Materials:FR-4

Thickness of Copper:18um


			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description Appro.	CITIZEN ELECTRONICS CO.,LTD.				

5. Characteristic




$I_F - \Delta x \Delta y$ Characteristic $T_C=25^{\circ}\text{C}$

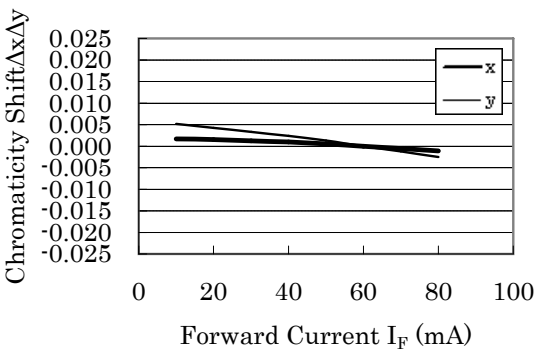

$T_C - \Delta x \Delta y$ Characteristic $I_F=60\text{mA}$

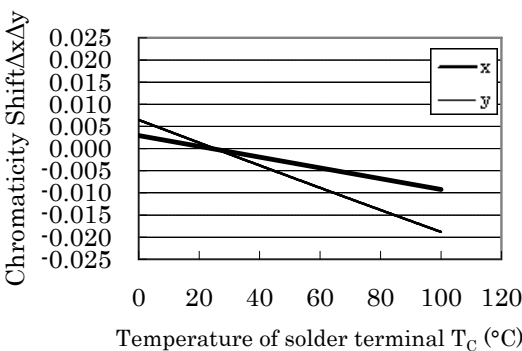

Directive Characteristic

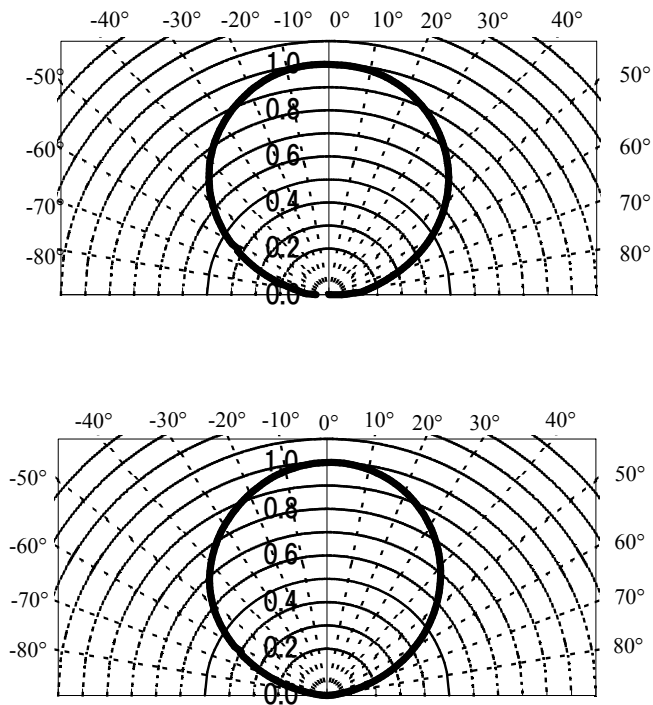

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description Appr.	CITIZEN ELECTRONICS CO.,LTD.				

6. Reliability

(1) Details of the tests

Test Item	Test Condition
Life Test in Continuous Operation	25±3°C, I _F =60 mA × 1000+24/-12hours
Low Temperature Storage Test	-40+3/-5°C × 1000+24/-12hours
High Temperature Storage Test	100+5/-3°C × 1000+24/-12hours
Moisture-proof Test	60 ±2°C, 90 ±5%RH for 1000+24/-12hours
Thermal Shock Test	-40°C × 30 minutes and 100°C × 30 minutes, 100cycle
Solder Heat Resistance Test	Recommended temperature profile (reflow soldering) ×2, (2nd test must be started after the samples are stabilized thermally.)

(2) Judgment Criteria of Failure for Reliability Test

Measuring Item	Symbol	Measuring Condition	Judgement Criteria for Failure
Forward Voltage	V _F	I _F =60mA	> U×1.2
Reverse Current	I _R	V _F =5V	> U×2
Luminous Intensity	I _V	I _F =60mA	< S×0.7

U means the upper limit of the specified characteristics. S means the initial value.


Note: Measurement shall be taken between 2 hours and 24 hours, having returned the test pieces to the normal ambient conditions after the completion of each test.

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10 K.Funakubo	19.Mar.'10 K.Sasuga	19.Mar.'10 T.Wada	Name	CL-L270-2MU1D
						Drawing No	
Mark	Date	Description Appro.	CITIZEN ELECTRONICS CO.,LTD.				

7. Taping Specifications (in accordance with JIS standard)


(1) Shape and Dimensions of Reel

(Unit: mm)

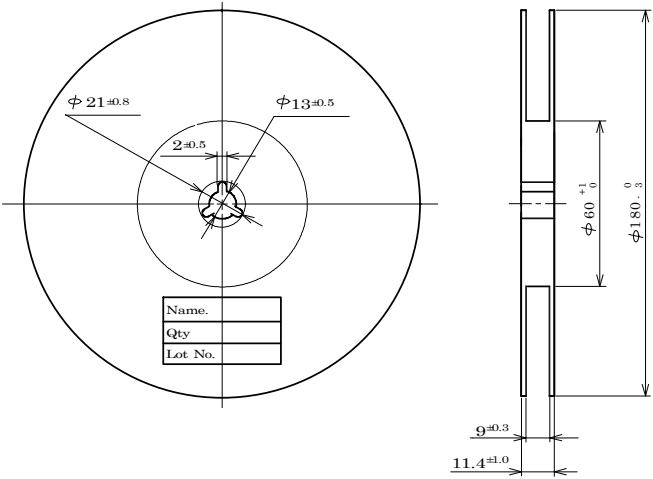


(2) Dimensions of Tape

(Unit: mm)

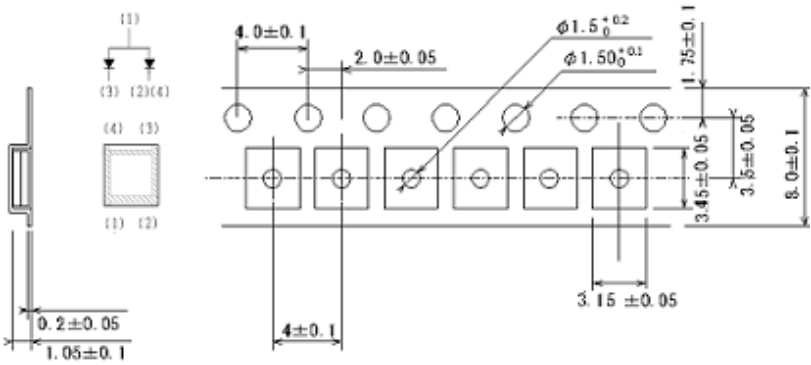

(3) Configuration of Tape

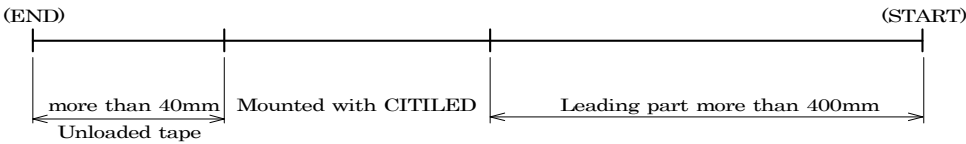


(4) Quantity: 3000pcs/reel

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description	Appro.	CITIZEN ELECTRONICS CO.,LTD.			

8. Packing Specifications

8-1. Moisture-proof Packing

To prevent moisture absorption during transportation and storage, reels are packed in aluminum envelopes which contain a desiccant with a humidity indicator.

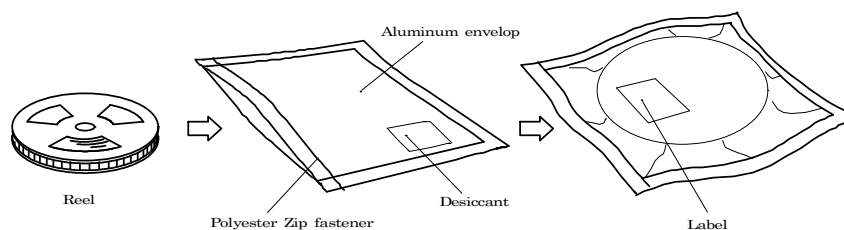

8-2. Storage

To prevent moisture absorption, it is strongly recommended that reels (in bulk or taped) should be stored in the dry box (or the desiccator) with a desiccant as the appropriate storage place. If not, the following is recommended.

Temperature: 5 ~ 30 °C
Humidity: 60%RH max

The devices should be mounted as soon as possible after unpacking. If you store the unpacked reels, please store them in the dry box or seal them into the envelop again.

Moisture Sensitive Level1 (IPC/JEDEC J-STD-020C)

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description Appro.	CITIZEN ELECTRONICS CO.,LTD.				

9. Precautions

9-1. Soldering

(1) Lead free soldering


1) Following soldering paste is recommended

Melting temperature: 216 ~ 220°C.

Composition: Sn 3.5Ag 0.75Cu

2) The temperature profile at the top surface of the parts is recommended as shown

3) It is requested that products should be handled after their temperature has dropped down to the normal room temperature

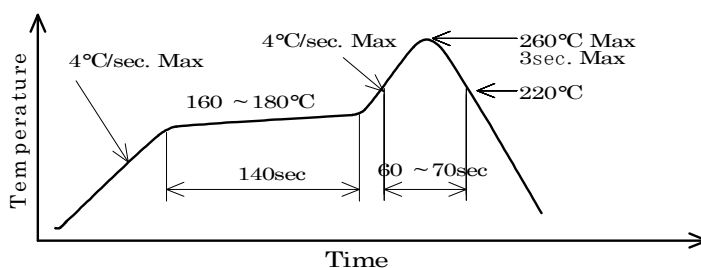

9-2. Washing

(1) When washing after soldering is needed, following conditions are requested.

a) Washing solvent: Pure Water

b) Temperature, time: 50°C or less × 30 seconds max.
or 30°C or less × 3 minutes max.

c) Ultrasonic washing: 300W or less

9-3. Other directions


(1) It is requested to avoid any stress added to the resin portion while it is heated.

(2) It is requested to avoid any friction by sharp metal nail etc. to the resin portion.

			Approved	Checked	Drawn	Symbol	CITELED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description Appro.	CITIZEN ELECTRONICS CO.,LTD.				

10. Designing precautions




- (1) The current limiting resistor should be placed in the circuit so that is driven within its rating. Also avoid reverse voltage (over-current) applied instantaneously when ON or OFF.
- (2) When pulse driving current is applied, average current consumption should be within the rating. Also avoid reverse voltage applied when put off.
- (3) Recommended soldering pattern

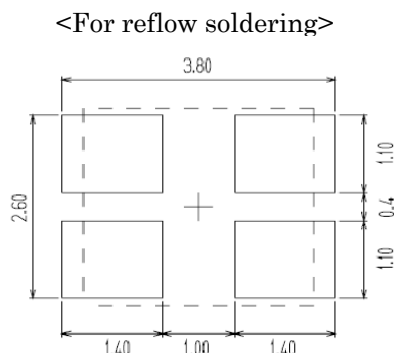

Unit : mm

The above dimensions are not the one which guarantee the performance of mountability.

- (4) When assembling the circuit board into the finished products, care must be taken to avoid the component parts from touching other parts.
- (5) When using multiple LEDs, it is required to connect a current limiting resistor on each path which the current flows to the LEDs.

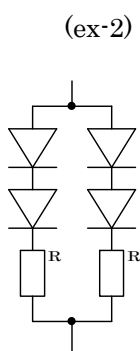

(6) Other

- 1) This product complies with RoHS directives.
- 2) When this product is secondarily fabricated such as change in shape, it is not included in our warranty.
- 3) The agreement of formal product specifications is required prior to mass production.

			Approved	Checked	Drawn	Symbol	CITILED
			19.Mar.'10	19.Mar.'10	19.Mar.'10	Name	CL-L270-2MU1D
			K.Funakubo	K.Sasuga	T.Wada	Drawing No	
Mark	Date	Description	Appr.	CITIZEN ELECTRONICS CO.,LTD.			