

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 30 mm ... 36 mm, shielding: no, connecting thread: M50 x 1.5, color: jet black RAL 9005

Your advantages

- Plastic material conforms to UL 746C f1

Commercial data

Item number	1411138
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 686 (C-2-2019)
GTIN	4046356922708
Weight per piece (including packing)	100.6 g
Weight per piece (excluding packing)	97.3 g
Customs tariff number	39269097
Country of origin	TR

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Technical data

Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---


Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BM-29
Shielded	no
Execution of the strain relief	A

Characteristics

Category of shock impact	4
Design, Strain relief	A

Dimensions

Dimensional drawing	
Length	71 mm
Length of the connecting thread	18 mm
Hole diameter	50.1 mm ... 50.3 mm
Wrench size, union nut	60 mm
Wrench size, support	60 mm
Hexagon angular dimension	67.7 mm
Thread type connection side	M50 x 1.5
Thread pitch	1.5 mm

Connection data

Tightening torque	20 Nm $\pm$ 2 Nm (Cap nut)
	8 Nm (Support sleeve)

Material specifications

Color	black (RAL 9005)
Material Housing	PA
Flammability rating according to UL 94	V2
Seal material Cable seal	CR

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Material for screw connection	PA
-------------------------------	----

Cable/line

External cable diameter Cable 1	30 mm ... 36 mm
External cable diameter	30 mm ... 38 mm (for UL 514 B)
Halogen-free	no

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1
	4
	4X
	12
	13
Ambient temperature (operation)	-40 °C ... 100 °C (static)

G-INS-M50-L68L-PNES-BK - Cable gland


1411138

<https://www.phoenixcontact.com/us/products/1411138>



Drawings

Dimensional drawing

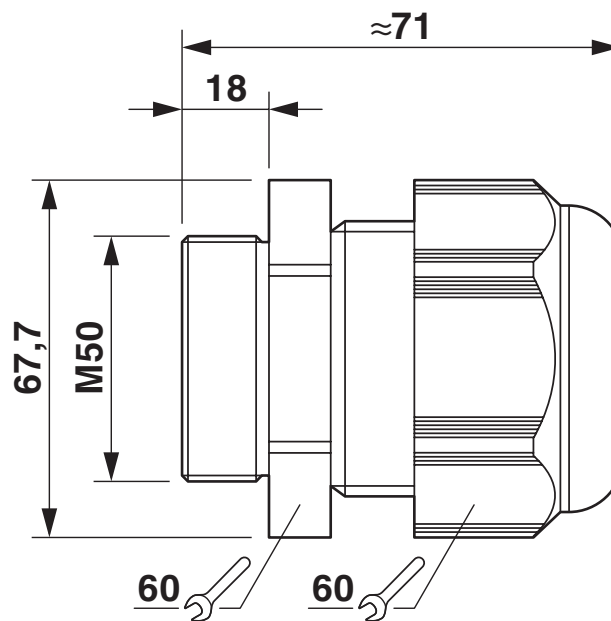

Dimensional drawing

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1411138>

DNV

Approval ID: TAE00003WX



CSA

Approval ID: 115116



VDE Zeichengenehmigung

Approval ID: 40024418



UL Listed

Approval ID: E199260



cUL Listed

Approval ID: E199260

cULus Listed

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-M50-L68L-PNES-BK - Cable gland



1411138

<https://www.phoenixcontact.com/us/products/1411138>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

G-INS-M50-L68L-PNES-BK - Cable gland

1411138

<https://www.phoenixcontact.com/us/products/1411138>



Accessories

A-INL-M50-P-BK - Counter nut

1411219

<https://www.phoenixcontact.com/us/products/1411219>

Counter nut, for threads M50 x 1.5, color: jet black



SEALING PLUG 35X35 RD - Closing cap

1421865

<https://www.phoenixcontact.com/us/products/1421865>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com