

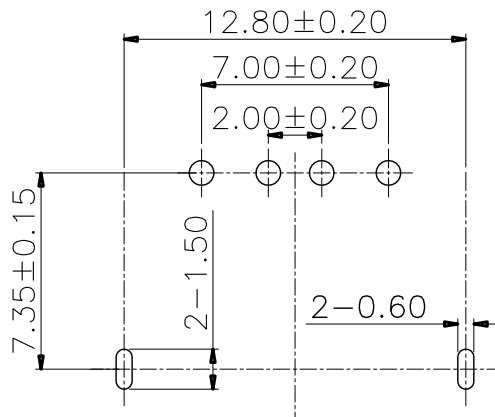
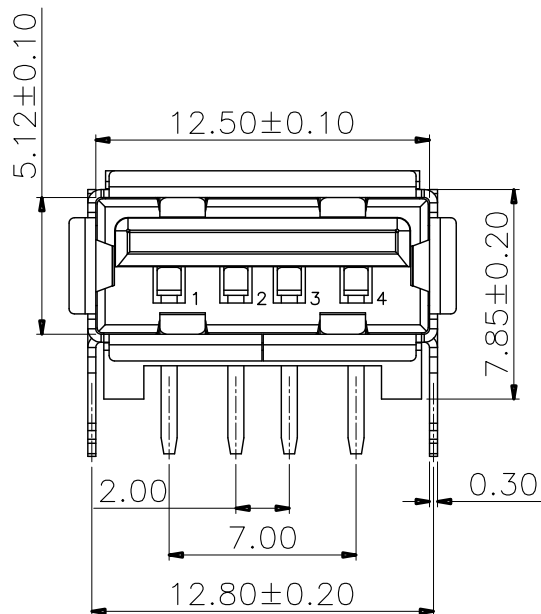


由Autodesk教育版产品制作

由Autodesk教育版产品制作

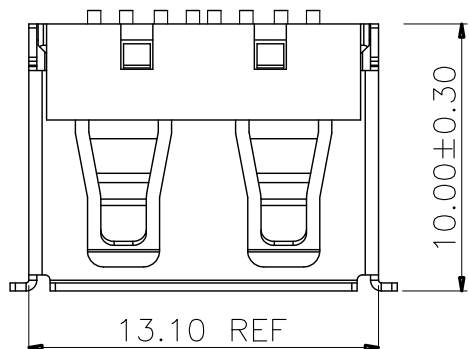

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE:GENERAL TOLERANCE:±0.1mm

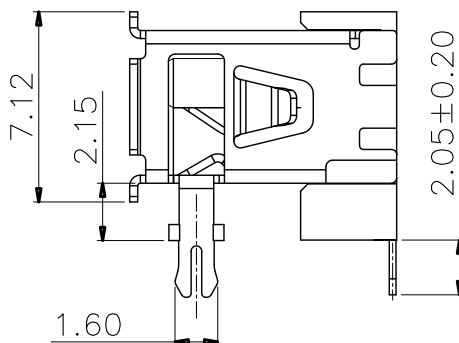

MAPX

MODIFICATION

DATE

NOTES:

1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

PRODUCT CHART DWG

TOLERANCE UNLESS OTHERWISE

X	±0.25	X	±5.°
.X	±0.20	.XX	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

UNIT UNITS	MM	DATE DATE	2015.02.04	SCALE SCALE	1:1	CHECK CHECK	2015.02.04	APPROVE APPROVE	2015.02.04	PRODUCT PART NO. PRODUCT PART NO.	909-152A1015D10200	PRODUCT NO. PRODUCT NO.	AF10.0B 款前两脚有边铜壳PBT白胶 7.8DIP无耳朵	VER VER	AO
---------------	----	--------------	------------	----------------	-----	----------------	------------	--------------------	------------	--------------------------------------	--------------------	----------------------------	------------------------------------	------------	----

由Autodesk教育版产品制作