
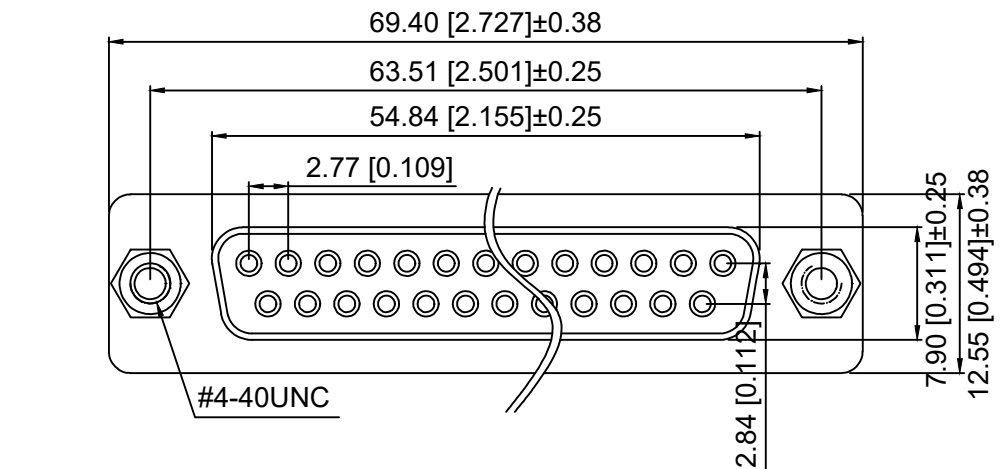
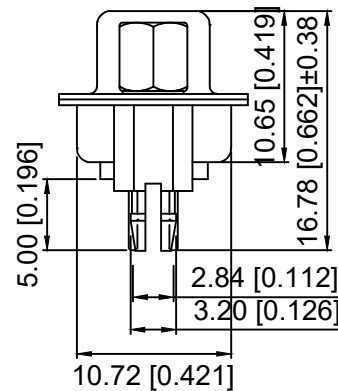


PCB LAYOUT

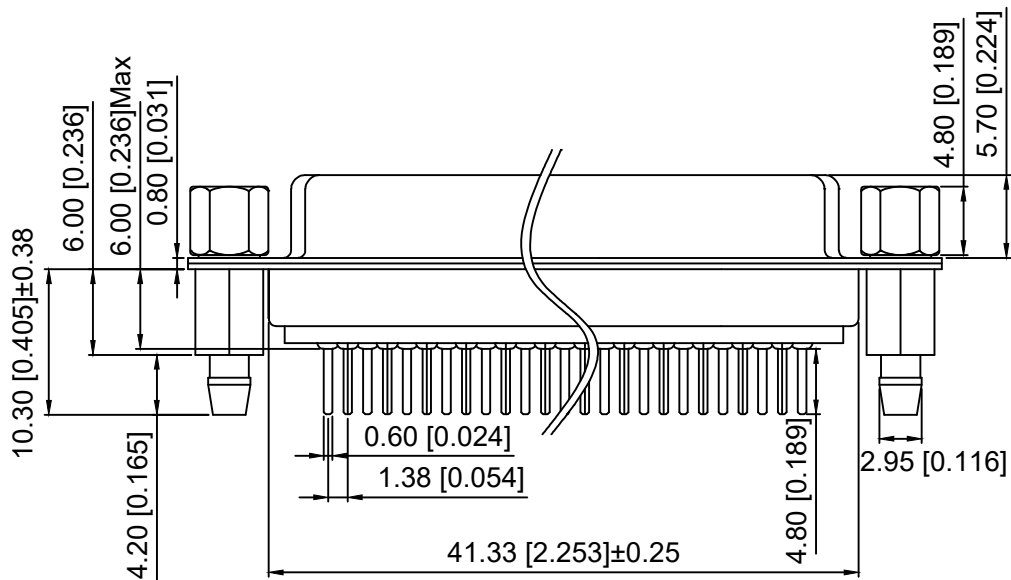

Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:3A AC/DC

额定电流:3A AC/DC

3.Withstanding voltage:1000V AC/minute

耐受电压: ≥1000V AC/分钟

4.Temperature range: -25℃~+80℃

温度范围: -25℃~+80℃

5.Insulation resistance:5000MΩMIN

绝缘电阻: ≥5000MΩ

6.Contact resistance:30mΩMax

接触电阻: ≥30mΩ

Material:

材料:

7.Rubber core:PBT UL94V-0

胶芯: PBT UL94V-0

8.The iron shell:SPCC Terminal half-Gold 15u Matte Tin

铁壳: SPCC 半金15u雾锡

B、成品不能有弯针, R角不一致等不良。

X02 37 F T 17 B 5
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
② Row No.Pin No.XX-37;
③ Welding Board Angle :F-Female
④ T: Tradutional
⑤ Planting Categoty: 17-Terminal half-Gold 15u Matte Tin
⑥ Color:B-BLACK
⑦ 5:TYPE-5

铆合方式	TYPE-5:铆鱼叉锁螺丝
图示	

						DSND		SCALE: N/A	MODEL TYPE: D-USB
ΔX					ANGLAR	DWN		VIEW:	PART NO.: X0237FT17B5
ΔX					L ≤ 4	CHKD		UNIT: mm/in	DWG NO.: X-X0237FT17B5
ΔX					4 < L ≤ 16	APPD		SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63				
					L > 63				
					±0.5				
					UNSPECIFIED TOLERANCES				
						XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
									SHEET
									REVISION
									1/1
									A0