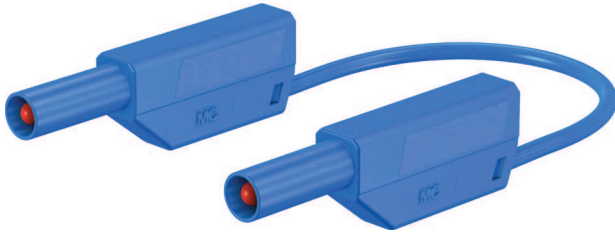


Messleitung SLK4...-E... XV...-4.../EVO


Hoch flexibel, mit PVC- oder Silikon-Isolierung, beidseitig mit stapelbarem Ø 4 mm-Lamellenstecker mit starrer Isolierhülse.

SLK4...-E...**XV...-4.../EVO**


EVOLution – die konsequente Weiterentwicklung der Messleitung mit Stapelstecker. Der frontseitig geschlossene Stecker mit MULTILAM Kontakttechnologie, die rückseitige Beisteckbuchse sowie der Leitungsanschluss sind aus einem Metallteil gefertigt. Der Übergangswiderstand liegt damit unter den Werten der üblichen Lamellenstecker. Die Leitungen zeichnen sich durch ein attraktives Preis-Leistungsverhältnis aus, ohne dabei auf die gewohnte MC-Qualität zu verzichten.

**Test Lead SLK4...-E... XV...-4.../EVO**

Highly flexible, with insulation in PVC or silicone with stackable Ø 4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

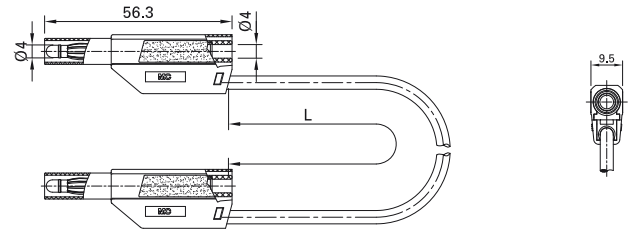

EVOLution – consistent further development of stackable test lead. The front panel plug with MULTILAM contact technology, the rear tap socket, and the cable connection are all made from one metal part. This means the contact resistance is lower than that of standard MULTILAM connectors. The leads also feature an attractive price-performance ratio while at the same time maintaining the high MC quality our customers have come to expect.

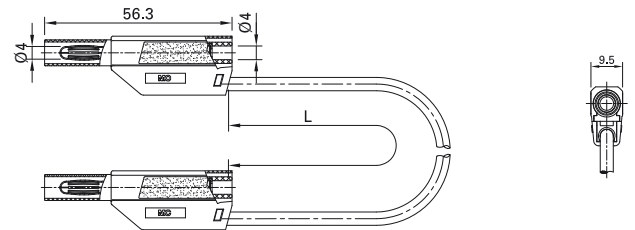

Typ Type	Bestell-Nr. Order No.	Bemessungsspannung/-strom Rated voltage/current	Leitung Lead		Längen L [cm] ¹⁾ Lead lengths L [cm] ¹⁾	*Farben ¹⁾ *Colors ¹⁾																
SLK4075-E/N	28.0127-□*	1000 V, CAT II / 15 A 600 V, CAT III / 15 A	PVC 0,75 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr></table>	20	21	22	23	24	25	26	27	28	29
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	28	29																		
XVF-4075/EVO	66.8563-□*	1000 V, CAT II / 15 A 600 V, CAT III / 15 A	PVC 0,75 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr></table>	20	21	22	23	24	25	26	27	28	29
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	28	29																		
XVF-410/EVO	66.8564-□*	1000 V, CAT II / 19 A 600 V, CAT III / 19 A	PVC 1,0 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>29</td><td></td></tr></table>	20	21	22	23	24	25	26	27	29	
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	29																			
SLK410-E/SIL	28.0126-□*	1000 V, CAT II / 19 A 600 V, CAT III / 19 A	SIL 1,0 mm²	Au C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>21</td><td>22</td><td>23</td><td></td><td></td></tr></table>	21	22	23							
025	050	075																				
100	150	200																				
21	22	23																				
XVS-410/EVO	66.8561-□*	1000 V, CAT II / 19 A 600 V, CAT III / 19 A	SIL 1,0 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td></tr><tr><td>26</td><td>27</td><td>28</td><td></td><td></td></tr></table>	21	22	23	24	25	26	27	28		
025	050	075																				
100	150	200																				
21	22	23	24	25																		
26	27	28																				
SLK425-E	28.0124-□*	1000 V, CAT II / 32 A 600 V, CAT III / 32 A	PVC 2,5 mm²	Au C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr></table>	20	21	22	23	24	25	26	27	28	29
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	28	29																		
SLK425-E/N	28.0125-□*	1000 V, CAT II / 32 A 600 V, CAT III / 32 A	PVC 2,5 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr></table>	20	21	22	23	24	25	26	27	28	29
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	28	29																		
XVF-425/EVO	66.8562-□*	1000 V, CAT II / 32 A 600 V, CAT III / 32 A	PVC 2,5 mm²	Ni C E c UL US	<table><tr><td>025</td><td>050</td><td>075</td></tr><tr><td>100</td><td>150</td><td>200</td></tr></table>	025	050	075	100	150	200	<table><tr><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td></tr><tr><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td></tr></table>	20	21	22	23	24	25	26	27	28	29
025	050	075																				
100	150	200																				
20	21	22	23	24																		
25	26	27	28	29																		

¹⁾ Andere Farben- und/oder Längenkombinationen auf Anfrage.

¹⁾ Other color and/or length combinations available on request.