

Metallized Paper (MP) RFI-Capacitors Class X2
in PCM 10 mm to 22.5 mm. Capacitances from 1000 pF to 0.33 µF.
Rated Voltages 250 VAC and 275 VAC.

Special Features

- Particularly high reliability against active and passive flammability
- Excellent self-healing as well as high voltage strength
- High degree of interference suppression due to good attenuation and low ESR
- For temperatures up to +110° C
- According to RoHS 2011/65/EU

Typical Applications

Class X2 RFI applications to meet EMC regulations

- Capacitors connected to the mains between phase and neutral or phase and phase conductors
- General requirements, pulse peak voltage ≤ 2.5 kV

Construction


Dielectric:

Paper, epoxy resin impregnated

Capacitor electrodes:

Vacuum-deposited

Internal construction:

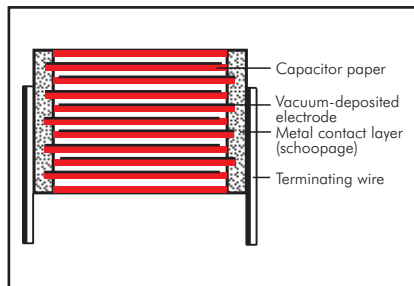

Encapsulation:

Self-extinguishing epoxy resin, UL 94 V-0, metal foil

Terminations:

Tinned wire.

Marking:

Marking: Black on Silver.

Electrical Data

Capacitance range:

1000 pF to 0.33 µF (E12-values on request)

Rated voltages: 250 VAC, 275 VAC

Continuous DC voltage* (general guide): ≤ 630 V

Capacitance tolerances: $\pm 20\%$

Operating temperature range:

-40° C to $+110^{\circ}$ C

Climatic test category:

40/110/56/C in accordance with IEC

Insulation resistance at $+20^{\circ}$ C:

$\geq 12 \times 10^3$ MΩ

Measuring voltage: 100 V/1 min.

Dissipation factors:

$\tan \delta \leq 13 \times 10^{-3}$ at 1 kHz and $+20^{\circ}$ C

Test specifications:

In accordance with IEC 60384-14

Approvals:

Authority	Specification	Symbol	Approval-No.
UL	UL 60384-14 CAN/CSA-E60384-14		E 100438

Maximum pulse rise time:

Capacitance pF/µF	Pulse rise time V/µsec max. operation
1000 ... 0.068	1500
0.1 ... 0.33	750

for pulses equal to a voltage amplitude with $\sqrt{2} \times U_{AC} = 390$ V

according to IEC 60384-14

Test voltage: 1300 VDC, 2 sec.

Reliability:

Operational life > 300 000 hours

Failure rate < 1 fit ($0.5 \times U_r$ and 40° C)

Mounting Recommendation

To minimize or avoid shock and/or vibration stresses to terminating wires and solder connections we recommend to fix voluminous resin-potted MP capacitors as from e.g. PCM 22.5 mm in an appropriate way since for constructional reasons they do not sit tight on the board.

* If safety-approved EMI suppression capacitors are operated with a DC voltage being above the specified AC voltage rating the given approvals are no longer valid (IEC 60384-14).

Furthermore the permissible pulse rise time du/dt ($F_{max.}$) will be subject to a reduction according to

$$F_{max.} = F_r \times \sqrt{2} \times U_{AC} / U_{DC}$$

if the DC operating voltage U_{DC} is higher than $\sqrt{2} \times U_{AC}$

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	250 VAC*					275 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	8.5	13.5	10	MPX20W1100FA00_____	4	8.5	13.5	10	MPX21W1100FA00_____
1500 „	4	8.5	13.5	10	MPX20W1150FA00_____	4	8.5	13.5	10	MPX21W1150FA00_____
2200 „	4	8.5	13.5	10	MPX20W1220FA00_____	4	8.5	13.5	10	MPX21W1220FA00_____
3300 „	4	8.5	13.5	10	MPX20W1330FA00_____	4	8.5	13.5	10	MPX21W1330FA00_____
4700 „	5	10	13.5	10	MPX20W1470FB00_____	5	10	13.5	10	MPX21W1470FB00_____
6800 „	5	13	19	15	MPX20W1680FC00_____	5	13	19	15	MPX21W1680FC00_____
0.01 µF	5	13	19	15	MPX20W2100FC00_____	5	13	19	15	MPX21W2100FC00_____
0.015 „	5	13	19	15	MPX20W2150FC00_____	5	13	19	15	MPX21W2150FC00_____
0.022 „	5	13	19	15	MPX20W2220FC00_____	5	13	19	15	MPX21W2220FC00_____
0.033 „	6	14	19	15	MPX20W2330FD00_____	6	14	19	15	MPX21W2330FD00_____
0.047 „	7	15	19	15	MPX20W2470FE00_____	7	15	19	15	MPX21W2470FE00_____
0.068 „	8	17	19	15	MPX20W2680FF00_____	8	17	19	15	MPX21W2680FF00_____
0.1 µF	10	18	19	15	MPX20W3100FG00_____	10	18	19	15	MPX21W3100FG00_____
	8	20	28	22.5	MPX20W3100FH00_____	8	20	28	22.5	MPX21W3100FH00_____
0.15 „	8	20	28	22.5	MPX20W3150FH00_____	8	20	28	22.5	MPX21W3150FH00_____
0.22 „	10	22	28	22.5	MPX20W3220FI00_____	10	22	28	22.5	MPX21W3220FI00_____
0.33 „	12	24	28	22.5	MPX20W3330FJ00_____	12	24	28	22.5	MPX21W3330FJ00_____

* f = 50/60 Hz

** PCM = Printed circuit module = pin spacing

Upon request with long pins 35-2 mm max.

Dims. in mm.


Part number completion:

Tolerance: 20 % = M


Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 149.

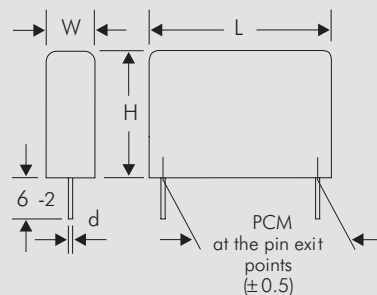

d = 0.6 Ø if PCM 10
d = 0.8 Ø if PCM ≥ 15

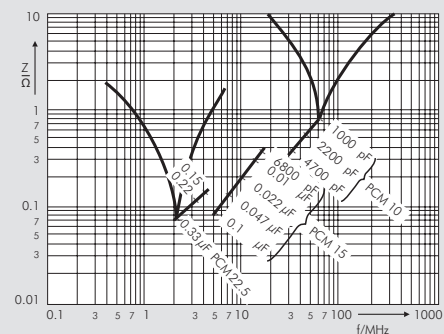

Impedance change with frequency
(general guide)

Rights reserved to amend design data without prior notification.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

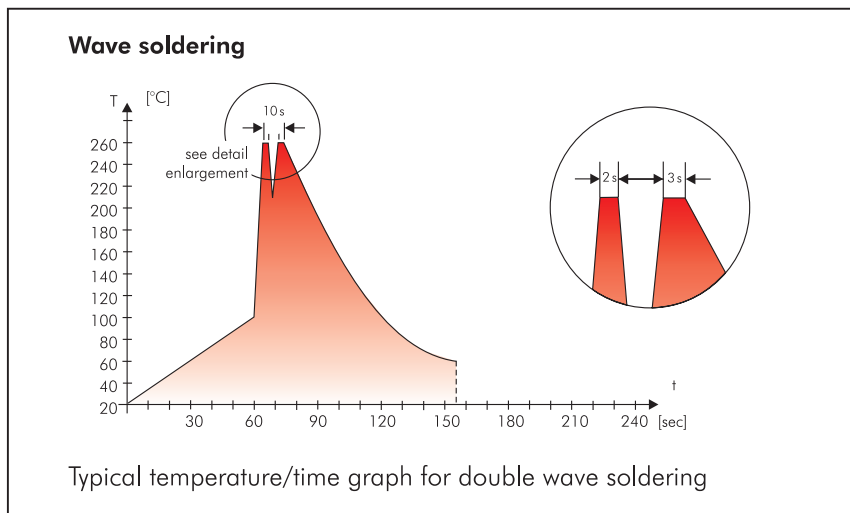

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- | | |
|------------------------|------------|
| – Lead | – PBB/PBDE |
| – PCB | – Arsenic |
| – CFC | – Cadmium |
| – Hydrocarbon chloride | – Mercury |
| – Chromium 6+ | – etc. |

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

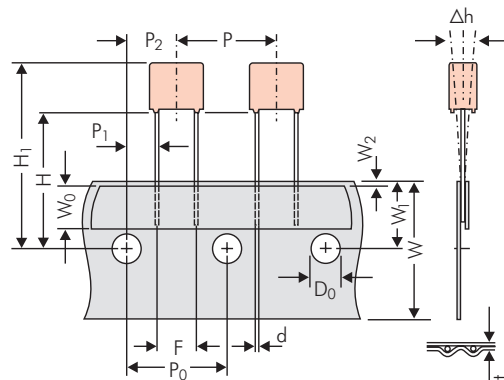


Diagram 1:
PCM 2.5/5/7.5mm

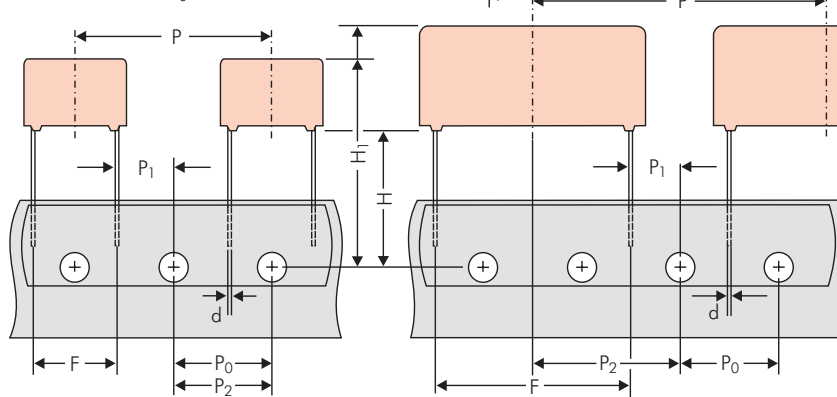


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 150)		ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	54 ±2 60 ±2 or 68 ±2 } depending on PCM and component dimensions
Unit		see details page 151.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

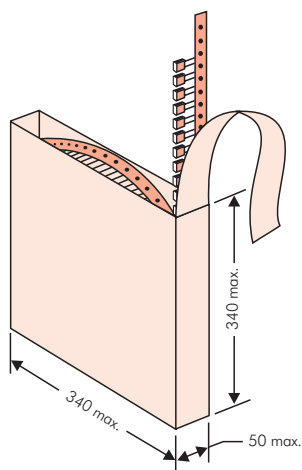

■ AMMO Packaging

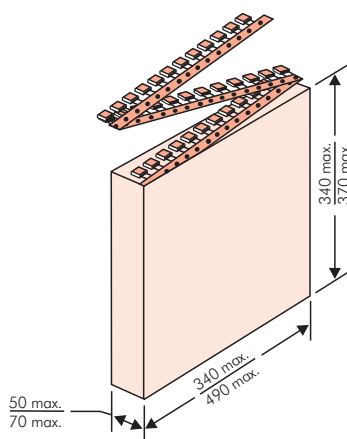

■ REEL Packaging

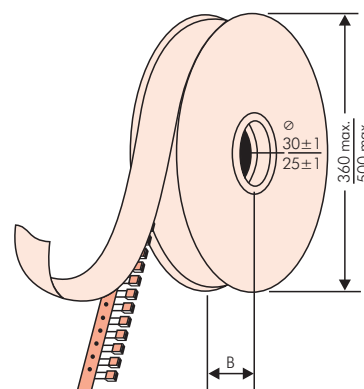

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made In Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100		WIMA Part No.: MKS2C034701C00K88D	
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5		
	Standard 10% Loss - Standard		Drühte 6-2
1000067326	Vorlage Debitor Inland		Week 03/2011

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	H16.5	H18.5	ø 360	ø 500		340 × 340		490 × 370							
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000			2500				2800			
	3	7.5	4.6	0C	5000			2300				2300			
	3.8	8.5	4.6	0D	5000			1800				1800			
	4.6	9	4.6	0E	5000			1500				1500			
	5.5	10	4.6	0F	5000			1200				1200			
5 mm	2.5	6.5	7.2	1A	5000			2500				2800			
	3	7.5	7.2	1B	5000			2300				2300			
	3.5	8.5	7.2	1C	5000			2000				2000			
	4.5	6	7.2	1D	6000			1500				1500			
	4.5	9.5	7.2	1E	4000			1500				1500			
	5	10	7.2	1F	3500			1400				1400			
	5.5	7	7.2	1G	4000			1200				1200			
	5.5	11.5	7.2	1H	2500			1200				1200			
	6.5	8	7.2	1I	2500			1000				1000			
	7.2	8.5	7.2	1J	2500			1000				1000			
	7.2	13	7.2	1K	2000			950				1000			
	8.5	10	7.2	1L	2000			800				800			
	8.5	14	7.2	1M	1500			800				800			
	11	16	7.2	1N	1000			600				640			
7.5 mm	2.5	7	10	2A	5000			2500		4400		2500			
	3	8.5	10	2B	5000			2200		4300		2300		4150	
	4	9	10	2C	4000			1700		3200		1700		3100	
	4.5	9.5	10.3	2D	3500			1500		2900		1400		2700	
	5	10.5	10.3	2E	3000			1300		2500		1300			
	5.7	12.5	10.3	2F	2000			1000		2200		1100			
	7.2	12.5	10.3	2G	1500			900		1800		1000			
10 mm	3	9	13	3A	3000			1100		2200				1900	
	4	8.5	13.5	FA	3000			900		1600				1450	
	4	9	13	3C	3000			900		1600				1450	
	4	9.5	13	3D	3000			900		1600				1400	
	5	10	13.5	FB	2000			700		1300				1200	
	5	11	13	3F	3000			700		1300				1200	
	6	12	13	3G	2400			550		1100				1000	
	6	12.5	13	3H	2400			550		1100				1000	
	8	12	13	3I	2000			400		800				740	
15 mm	5	11	18	4B	2400			600		1200				1150	
	5	13	19	FC	1000			600		1200				1200	
	6	12.5	18	4C	2000			500		1000				1000	
	6	14	19	FD	1000			500		1000				1000	
	7	14	18	4D	1600			450		900				850	
	7	15	19	FE	1000			450		900				850	
	8	15	18	4F	1200			400		800				740	
	8	17	19	FF	500			400		800				740	
	9	14	18	4H	1200			350		700				650	
	9	16	18	4J	900			350		700				650	
	10	18	19	FG	500			300		650				590	
	11	14	18	4M	1000			300		600				540	
22.5 mm	5	14	26.5	5A	1200					800				770	
	6	15	26.5	5B	1000					700				640	
	7	16.5	26.5	5D	760					600				550	
	8	20	28	FH	500					500				480	
	8.5	18.5	26.5	5F	500					480				450	
	10	22	28	FI	570*					420				380	
	10.5	19	26.5	5G	594*					400				360	
	10.5	20.5	26.5	5H	594*					400				360	
	11	21	26.5	5I	561*					380				350	
	12	24	28	FJ	480*					350				310	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370				
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	–	290	–
	13	25	33	FK	405*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	–	250	–
	15	26	33	FL	324*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	162*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	80*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	25*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–	–	–
	30	45	57	9E	60*	–	–	–	–	–	–	–	–	–	–
	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%	bulk	6 -2	
Type description: SMD-PET = SMDT SMD-PEN = SMDN SMD-PPS = SMDI FKP 02 = FKPO MKS 02 = MKSO FKS 2 = FKS2 FKP 2 = FKP2 FKS 3 = FKS3 FKP 3 = FKP 3 MKS 2 = MKS2 MKP 2 = MKP2 MKS 4 = MKS4 MKP 4C = MKPC MKP 4 = MKP4 MKP 10 = MKP1 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X1 R = MKX1 MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY MKP 4F = MKPF Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCP5 DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCHC DC-LINK HY = DCHY				Rated voltage: 50 VDC = B0 63 VDC = C0 100 VDC = D0 250 VDC = F0 400 VDC = G0 450 VDC = H0 520 VDC = H2 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0VV 275 VAC = 1VV 300 VAC = 2VV 305 VAC = AVV 350 VAC = BVV 440 VAC = 4VV 500 VAC = 5VV ...		Capacitance: 22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 µF = 2100 0.022 µF = 2220 0.047 µF = 2470 0.1 µF = 3100 0.22 µF = 3220 0.47 µF = 3470 1 µF = 4100 2.2 µF = 4220 4.7 µF = 4470 10 µF = 5100 22 µF = 5220 47 µF = 5470 100 µF = 6100 220 µF = 6220 1000 µF = 7100 1500 µF = 7150 ...				Size: 4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 19x31x56 PCM 48.5 = 8D 25x45x57 PCM 52.5 = 9D ...				Tolerance: ±20% = M ±10% = K ±5% = J ±2.5% = H ±1% = E ... Packing: AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ... Pin length (untaped) 3.5 ±0.5 = C9 6 -2 = SD 16 ±1 = P1 ... Pin length (taped) none = 00			
Version code: Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ...																	

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

WIMA:

[MP3X2-.15/275/20P22](#) [MPX21W3100FG00MSSD](#) [MPX21W3150FH00MSSD](#) [MPX20W3330FJ00MYSD](#)
[MPX20W4100FM00MYSD](#) [MPX21W4100FM00MYSD](#) [MPX21W3470FK00MYSD](#) [MPX20W3100FG00MSSD](#)
[MPX21W2470FE00MSSD](#) [MPX20W1220FA00MSSD](#) [MPX21W1150FA00MSSD](#) [MPX20W1470FB00MSSD](#)
[MPX21W1470FB00MSSD](#) [MPX21W2220FC00MSSD](#) [MPX21W2680FF00MSSD](#) [MPX21W2100FC00MB00](#) [MP3X2-](#)
[3300/275/10P10](#) [MPX20W3220FI00MSSD](#) [MP3X2-.68/275/20P27](#) [MP3X2-.1/250/20P15T](#) [MPX20W3100FH00MSSD](#)
[MPX21W3220FI00MSSD](#) [MP3X2-.068/275/20P15](#) [MP3X2-.22/275/20P22](#) [MPX21W4100FM00MSSD](#) [MP3X2-](#)
[.47/250/20P27](#) [MPX21W3220FI00MYSD](#) [MPX20W3470FK00MSSD](#) [MPX21W2100FC00MSSD](#) [MP3X2-](#)
[4700/275/20P10](#) [MP3X2-2K2/250/20P10T](#) [MP3X2-.33/250/20P22](#) [MP3X2-.1/275/20P15](#) [MP3X2-.1/275/10P15](#)
[MPX21W3470FK00MSSD](#) [MP3X2-4K7/250/20P10T](#) [MPX20W3680FL00MB00](#) [MP3X2-1/275/20P27](#)
[MPX20W1220FA00MI00](#) [MP3X2-2200/250/20P10](#) [MPX20W3330FJ00MSSD](#) [MPX21W1330FA00KSSD](#) [MP3X2-](#)
[.047/275/20P15](#) [MPX21W3330FJ00MSSD](#) [MP3X2-1500/275/20P10](#) [MP3X2-.022/275/20P15](#)
[MPX20W3100FG00MJ00](#) [MP3X2-4700/250/20P10](#) [MPX20W2470FE00MI00](#) [MP3X2-.15/275/20P22T](#)
[MPX21W3680FL00MSSD](#) [MPX20W1470FB00MI00](#) [MPX21W3150FH00MJ00](#) [MPX21W3330FJ00MYSD](#)
[MPX21W3100FG00KSSD](#) [MP3X2-3300/275/10T](#) [MP3X2-.47/275/20P27](#) [MPX21W1330FAZI00](#) [MP3X2-](#)
[.22/250/20P22](#) [MP3X2-.1/250/20P15](#) [MP3X2-.33/275/20P22](#) [MPX20W2470FE00MSSD](#) [MPX20W3680FL00MSSD](#)
[MPX21W2330FD00MSSD](#) [MPX21W1100FA00MB00](#) [MPX21W1220FA00MSSD](#) [MPX20W2680FF00MI00](#)
[MPX21W2330FD00MD00](#) [MPX21W2150FC00MSSD](#) [MPX21W3220FI00MSC9](#) [MPX21W3100FG00MB00](#)
[MPX20W2680FF00MSSD](#) [MPX21W1100FA00MSSD](#) [MPX21W2150FC00MB00](#) [MPX20W2100FC00MSSD](#)
[MPX20W4100FM00MSSD](#) [MPX20W2100FC00MD00](#) [MPX20W2220FC00MSSD](#) [MPX21W1330FA00MSSD](#)