
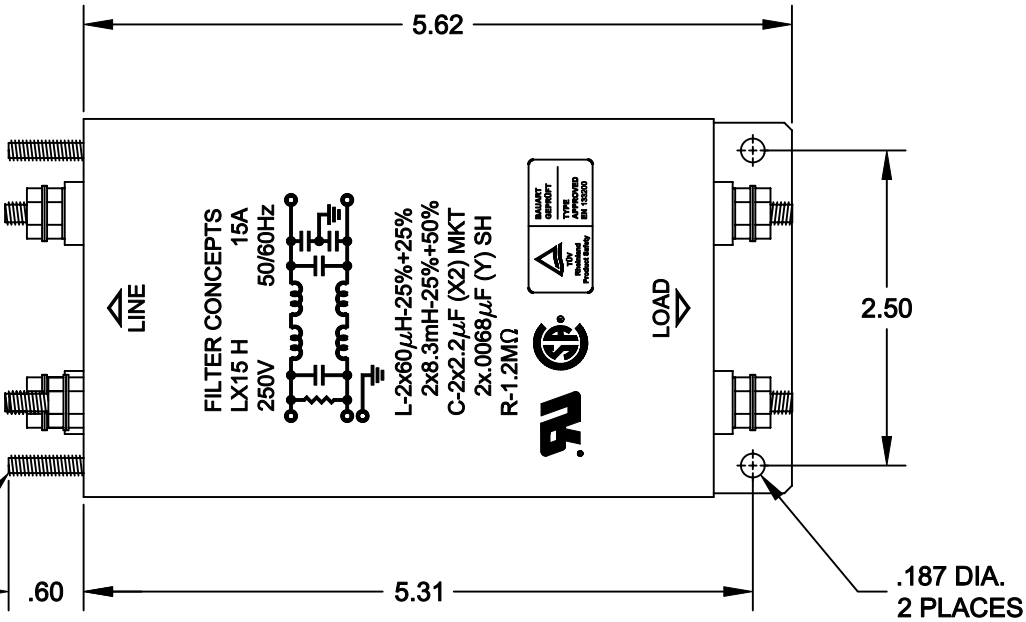



SPECIFICATIONS

- 1. CASE:
22 GA. (.030) CRS, TIN PLATED
- 2. RATED CURRENT:
15A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.5mA @ 250VAC, 50Hz


#8-32 STUD
4 PLACES

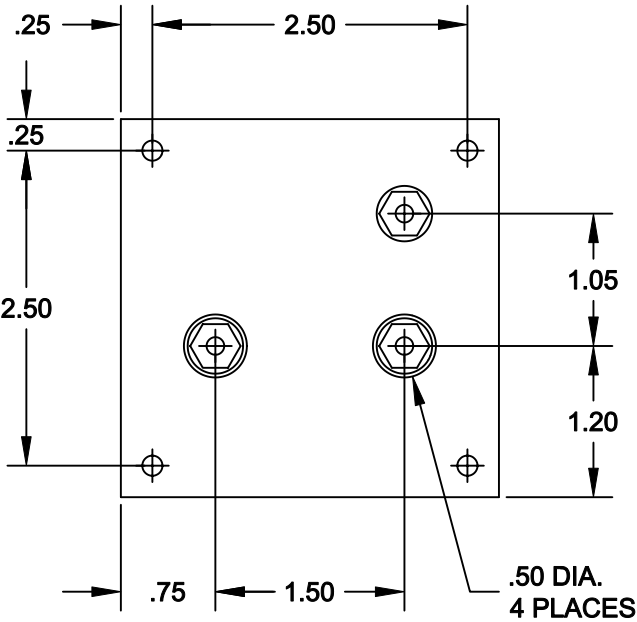

.187 DIA.
2 PLACES

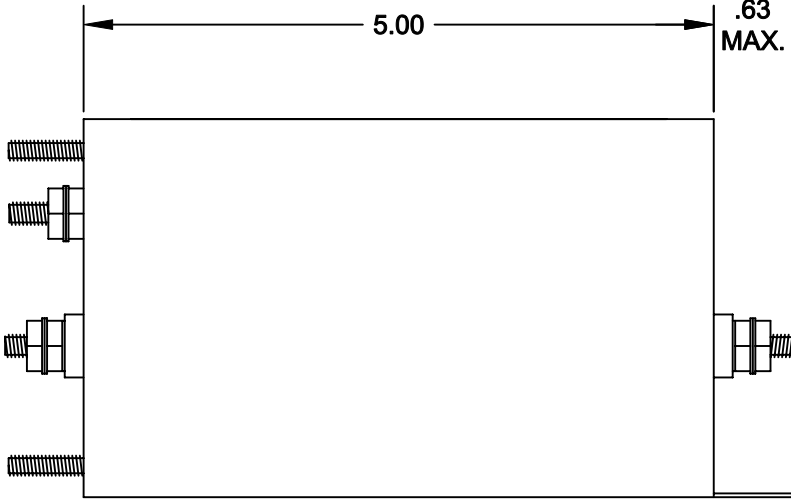


#8-32 TERMINAL STUD
5 PLACES

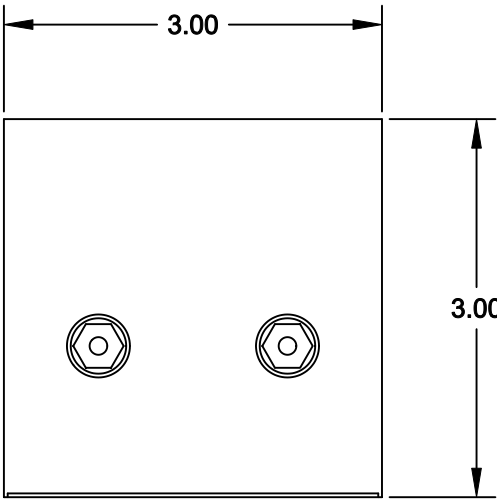

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	55 db	65 db	65 db	65 db	65 db	65 db
L/G	27 db	40 db	50 db	50 db	50 db	50 db

SCHEMATIC

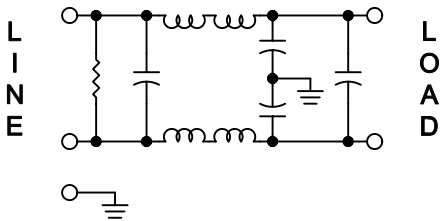

APPLICATION	USED ON
NEXT ASSY	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
.XXX ±.010

MATERIAL

FINISH

CONTRACT NO.

APPROVALS	DATE
DRAWN GIANG TRINH	09-24-02
CHECKED DANNIEL VUONG	11-04-02

FILTER CONCEPTS INC.

APPLICATION DRAWING

LX15 H FILTER

SIZE	CODE IDENT NO.	DRAWING NO.
B		7587

SCALE	2/3	SHEET	1	OF	1
-------	-----	-------	---	----	---

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11-04-02	LE
B	REVISED MARKING	05-14-03	LE
C	ADDED DIMENSION FOR TERMINALS	05-17-05	LE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[LX15 H](#)