
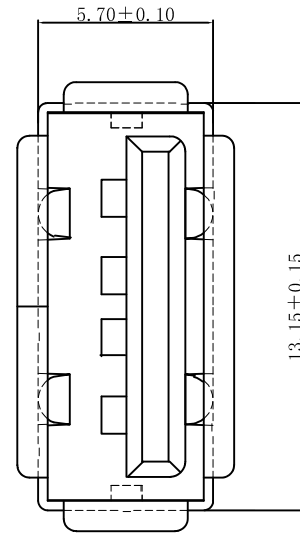


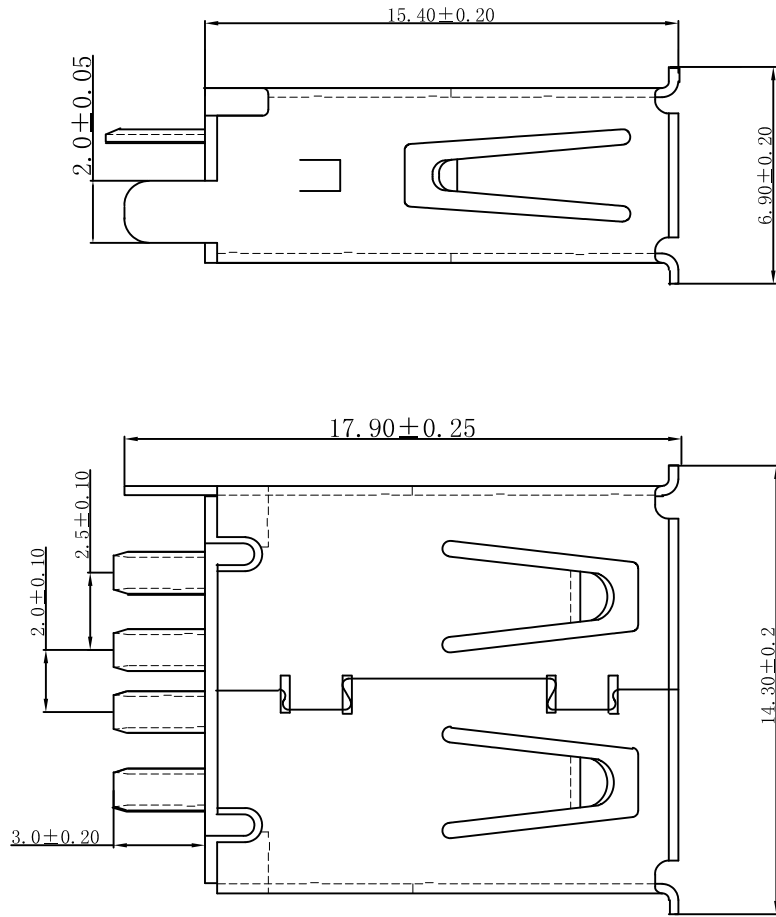

Note:

1.Material:

1.1 Housing: PBT+G.F.,UL94V-0

1.2 Contact: Stainless steel

1.3 Shell: Iron:Nickel plating for front cover, tinning for back cover

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding

voltage: 500 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 500 MΩ Min.

2.5 Total mating force: 3.57 Kg Max.

2.6 2500 insertion/extraction cycles

2.7 Temperature range: -30° C~80° C

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5°
.X	±0.20	.X	±2°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-751A1019W10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF180度15.3焊线式有边单脚铁壳白胶
日期 DATE	2021-04-15	核准 APPD	黄国荣	角法 VIEW	
				版本 VER	AO