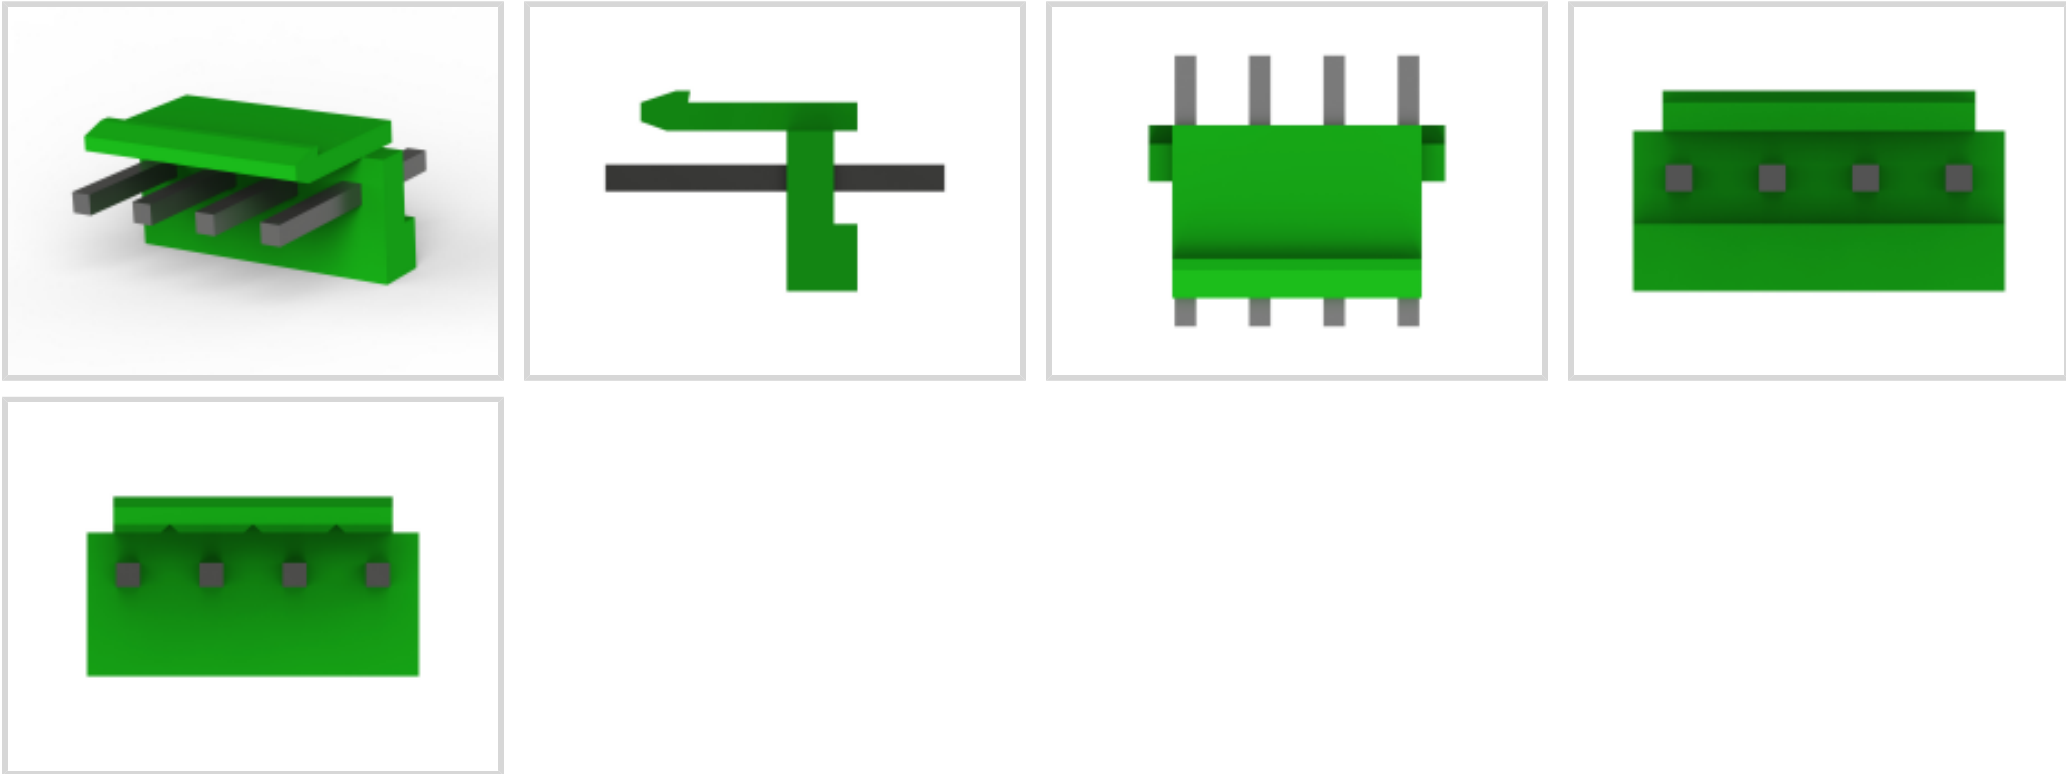




Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: **Wire-to-Board**

Number of Positions: **4**

Number of Rows: **1**

Centerline (Pitch): **3.96 mm [.156 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Power Positions	4
Number of Loaded Positions	4
Number of Positions	4
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Connector Profile	Low
Primary Product Color	Green

Contact Features

Contact Mating Area Length	7.7 mm[.303 in]
Contact Size	1.14mm
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.8 – 1.8 µm[31.5 – 70.86 µin]
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	3.96 mm[.156 in]



Dimensions

Connector Length	15.78 mm[.621 in]
Connector Height	9.2 mm[.36 in]
Connector Width	8.5 mm[.334 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Rating	Recognized
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	2500
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

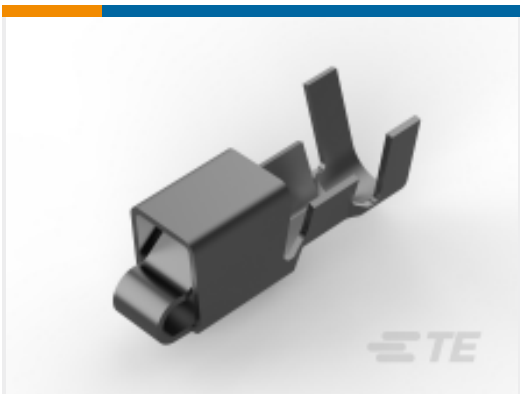
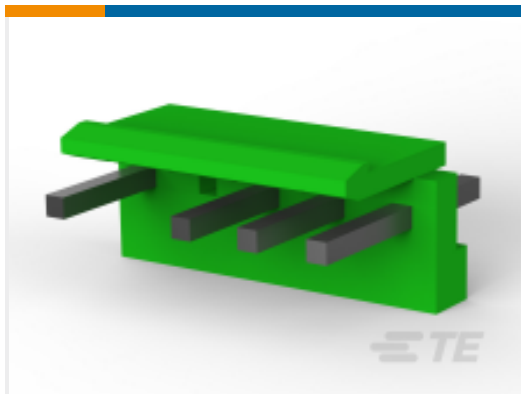
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

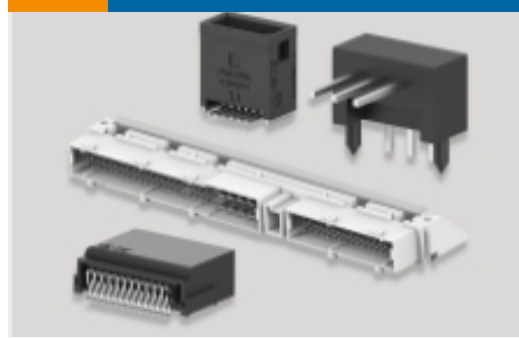


chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 1123721-2 ECONOMY POWER CONN REC CONT	 TE Part # 6-1123722-4 3.96 EP PLUG HSG 4P(GREEN)	 TE Part # 1744494-4 04P EP-II HOUSING, YELLOW	 TE Part # 1744416-4 4 POS EP II HSG, GLOW WIRE
 TE Part # 1123721-1 EP CONN. REC CONTACT	 TE Part # 6-1717011-4 EP CONN.HDR ASSY 4/5POS-W/O NO.2	 TE Part # 7-1565033-2 04P EP HDR HSG V0 GWT NO 0203P	

Also in the Series | Economy Power

 Connector Contacts(15)	 Connector Hardware(2)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(400)
 Rectangular Connector Housings(1)	 Rectangular Power Connectors(64)	 Wire-to-Board Connector Assemblies & Housings(142)	



Customers Also Bought



TE Part #1-292173-2
CT BOX HDR H SMT 2P O/TAPE NAT



TE Part #2-2176055-6
RLP73K 2B R11 1% 1K RL



TE Part #2176157-1
TLM 2010 0.75W R01 5% 100PPM 4K RL



TE Part #1-1123723-4
3.96 EP HDR ASSY 4P(NATURAL)



TE Part #6-1123722-4
3.96 EP PLUG HSG 4P(GREEN)



TE Part #1-1625867-7
RP 1J 0.166W 12K1 0.1% 25PPM 1K RL



TE Part #3-2176331-9
CRGP 2512 15K 1%



TE Part #2337237-1
TACT MINI GW 5.2X5.2X1.5 70GF

Documents

Product Drawings
3.96 EP HDR ASSY 4P(GREEN)
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_6-1123723-4_AD.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_6-1123723-4_AD.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_6-1123723-4_AD.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications
Application Specification
Japanese
Application Specification
English
Application Specification
English



Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Economy Power (EP) Connector

Japanese

Agency Approvals

VDE Certificate

English