

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		端子焊脚长度变更, 更新图框	2014.10.18	桑葚
A2	N/A		端子焊脚长度变更	2024.11.14	阿树

A

B

C





D

A

B

C

D

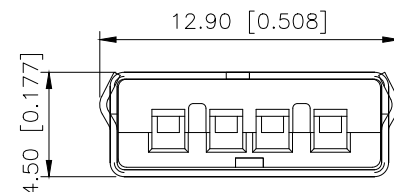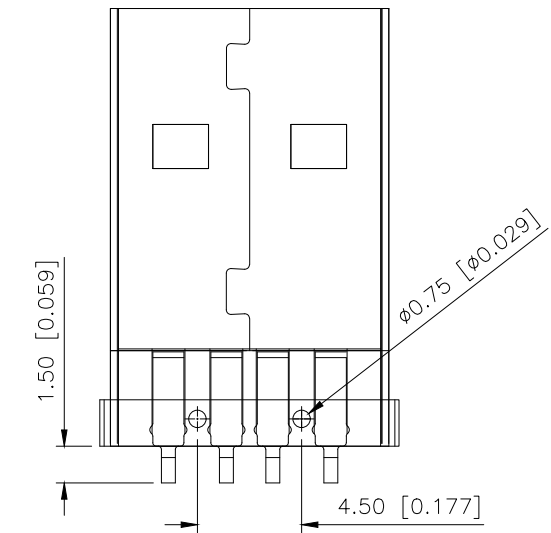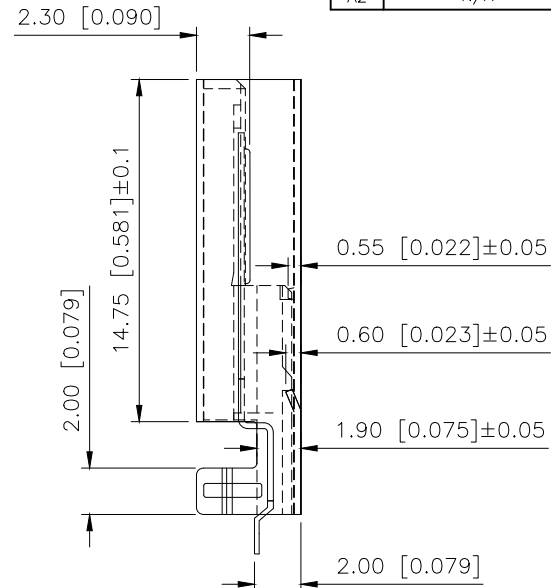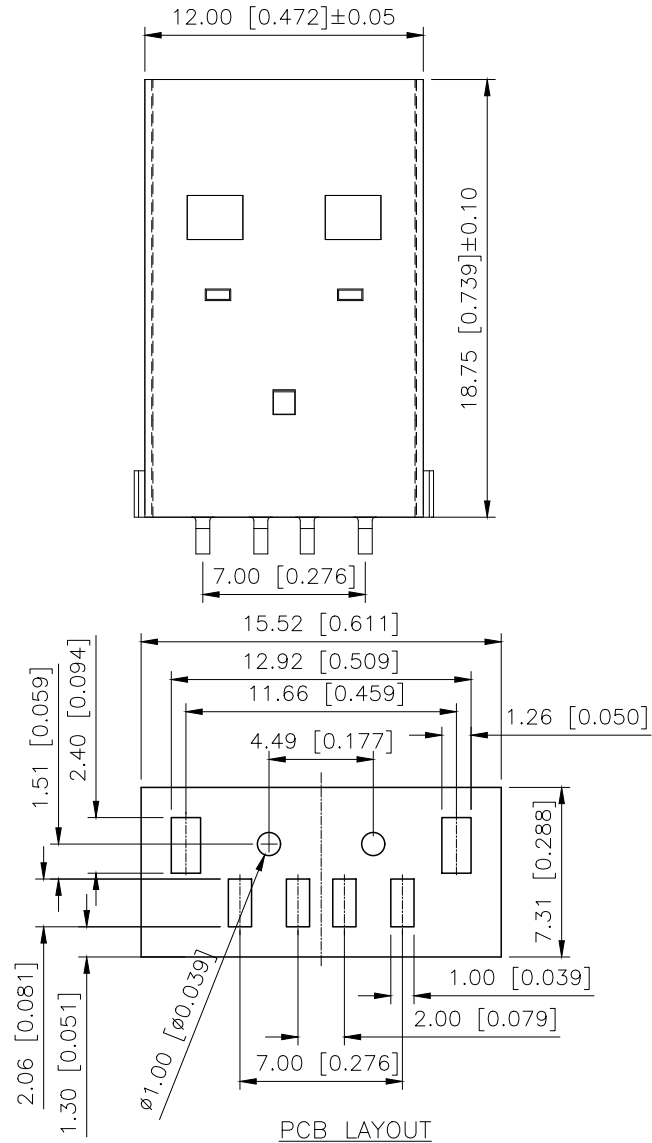

规格 Specifications:
1.电气特性:Electyical:
额定电压 Voltage rating:30V DC
额定电流 Current rating:1.5A Max
绝缘电阻 Insulation resistance:1000MΩ Min
接触电阻 Contact resistance:30mΩ Max
耐电压 Withstanding voltage:500V AC/minute
2.机械特性:Mechanical:
寿命 Durability: 3000 cycles Min
插入力 Connector Insertion forces: 3.75Kgf Max
拔出力 Connector unmating forces: 1.02Kgf Min
端子保持力 PIN RETENTION FORCE:1.2Kgf Min
工作温度 Temperature range:-40℃to+85℃

U217-04XN-4XV81

1:Au 1u"
6:Au 30u"
N:NICKEL
W:WHITE
B:BLACK
1:LCP
4:PBT

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE:	USB2.0 PLUG
PART NO.:	U217-04XN-4XV81
DWG NO.:	