

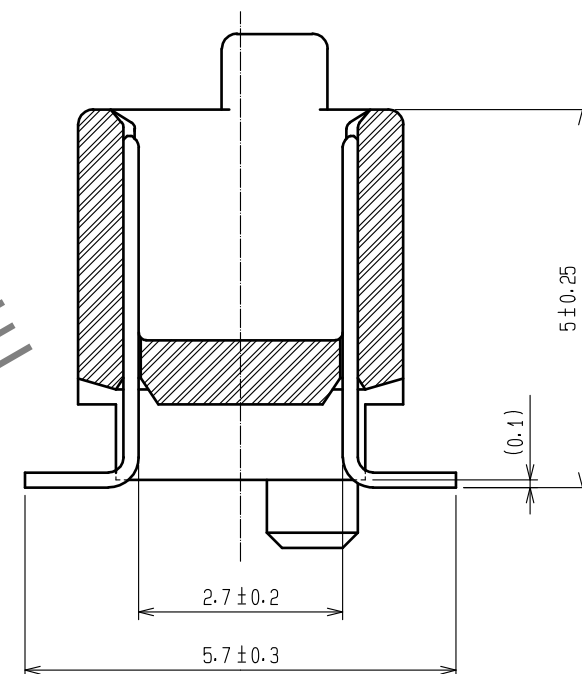





- NOTE 1  MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
- 4 FOR MODIFICATOIN, ETC. PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.
- 5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- 6 1 REEL : 1000CONNECTORS.

RECOMMENDED LAND PATTERN DIMENSION OF PCB(MOUNTING SIDE)

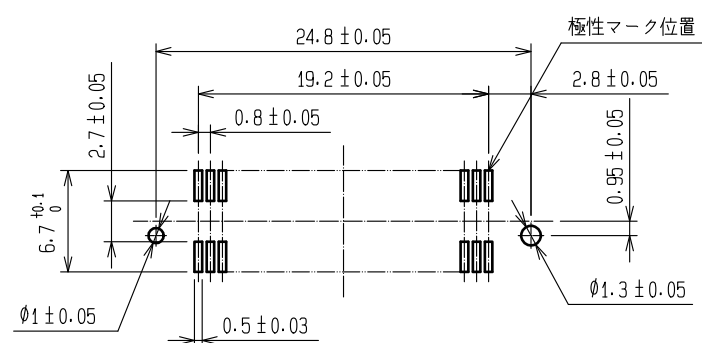

2PHOSPHOR BRONZE		CONTACT AREA : GOLD 0.1μm min.									
		LEAD AREA : TIN-PLATING 1μm min.									
		UNDER PLATING : NICKEL 1μm min.		4	POYESTER	TOP COVER TAPE					
1	PPS	LIGHT BROWN, UL94V-0		3	POLYSTYRENE	EMBOSSED CARRIER TAPE					
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA		16. 09. 01		DRAWING NO.		EDC-071638-92-00			
		CHECKED : HT. YAMAGUCHI		16. 09. 01		PART NO.		FX6-50P-0. 8SV1<92>			
		DESIGNED : KN. YAMAZAKI		16. 09. 01		CODE NO.		CL576-0024-9-92			
		DRAWN : KN. YAMAZAKI		16. 09. 01							
										 	

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

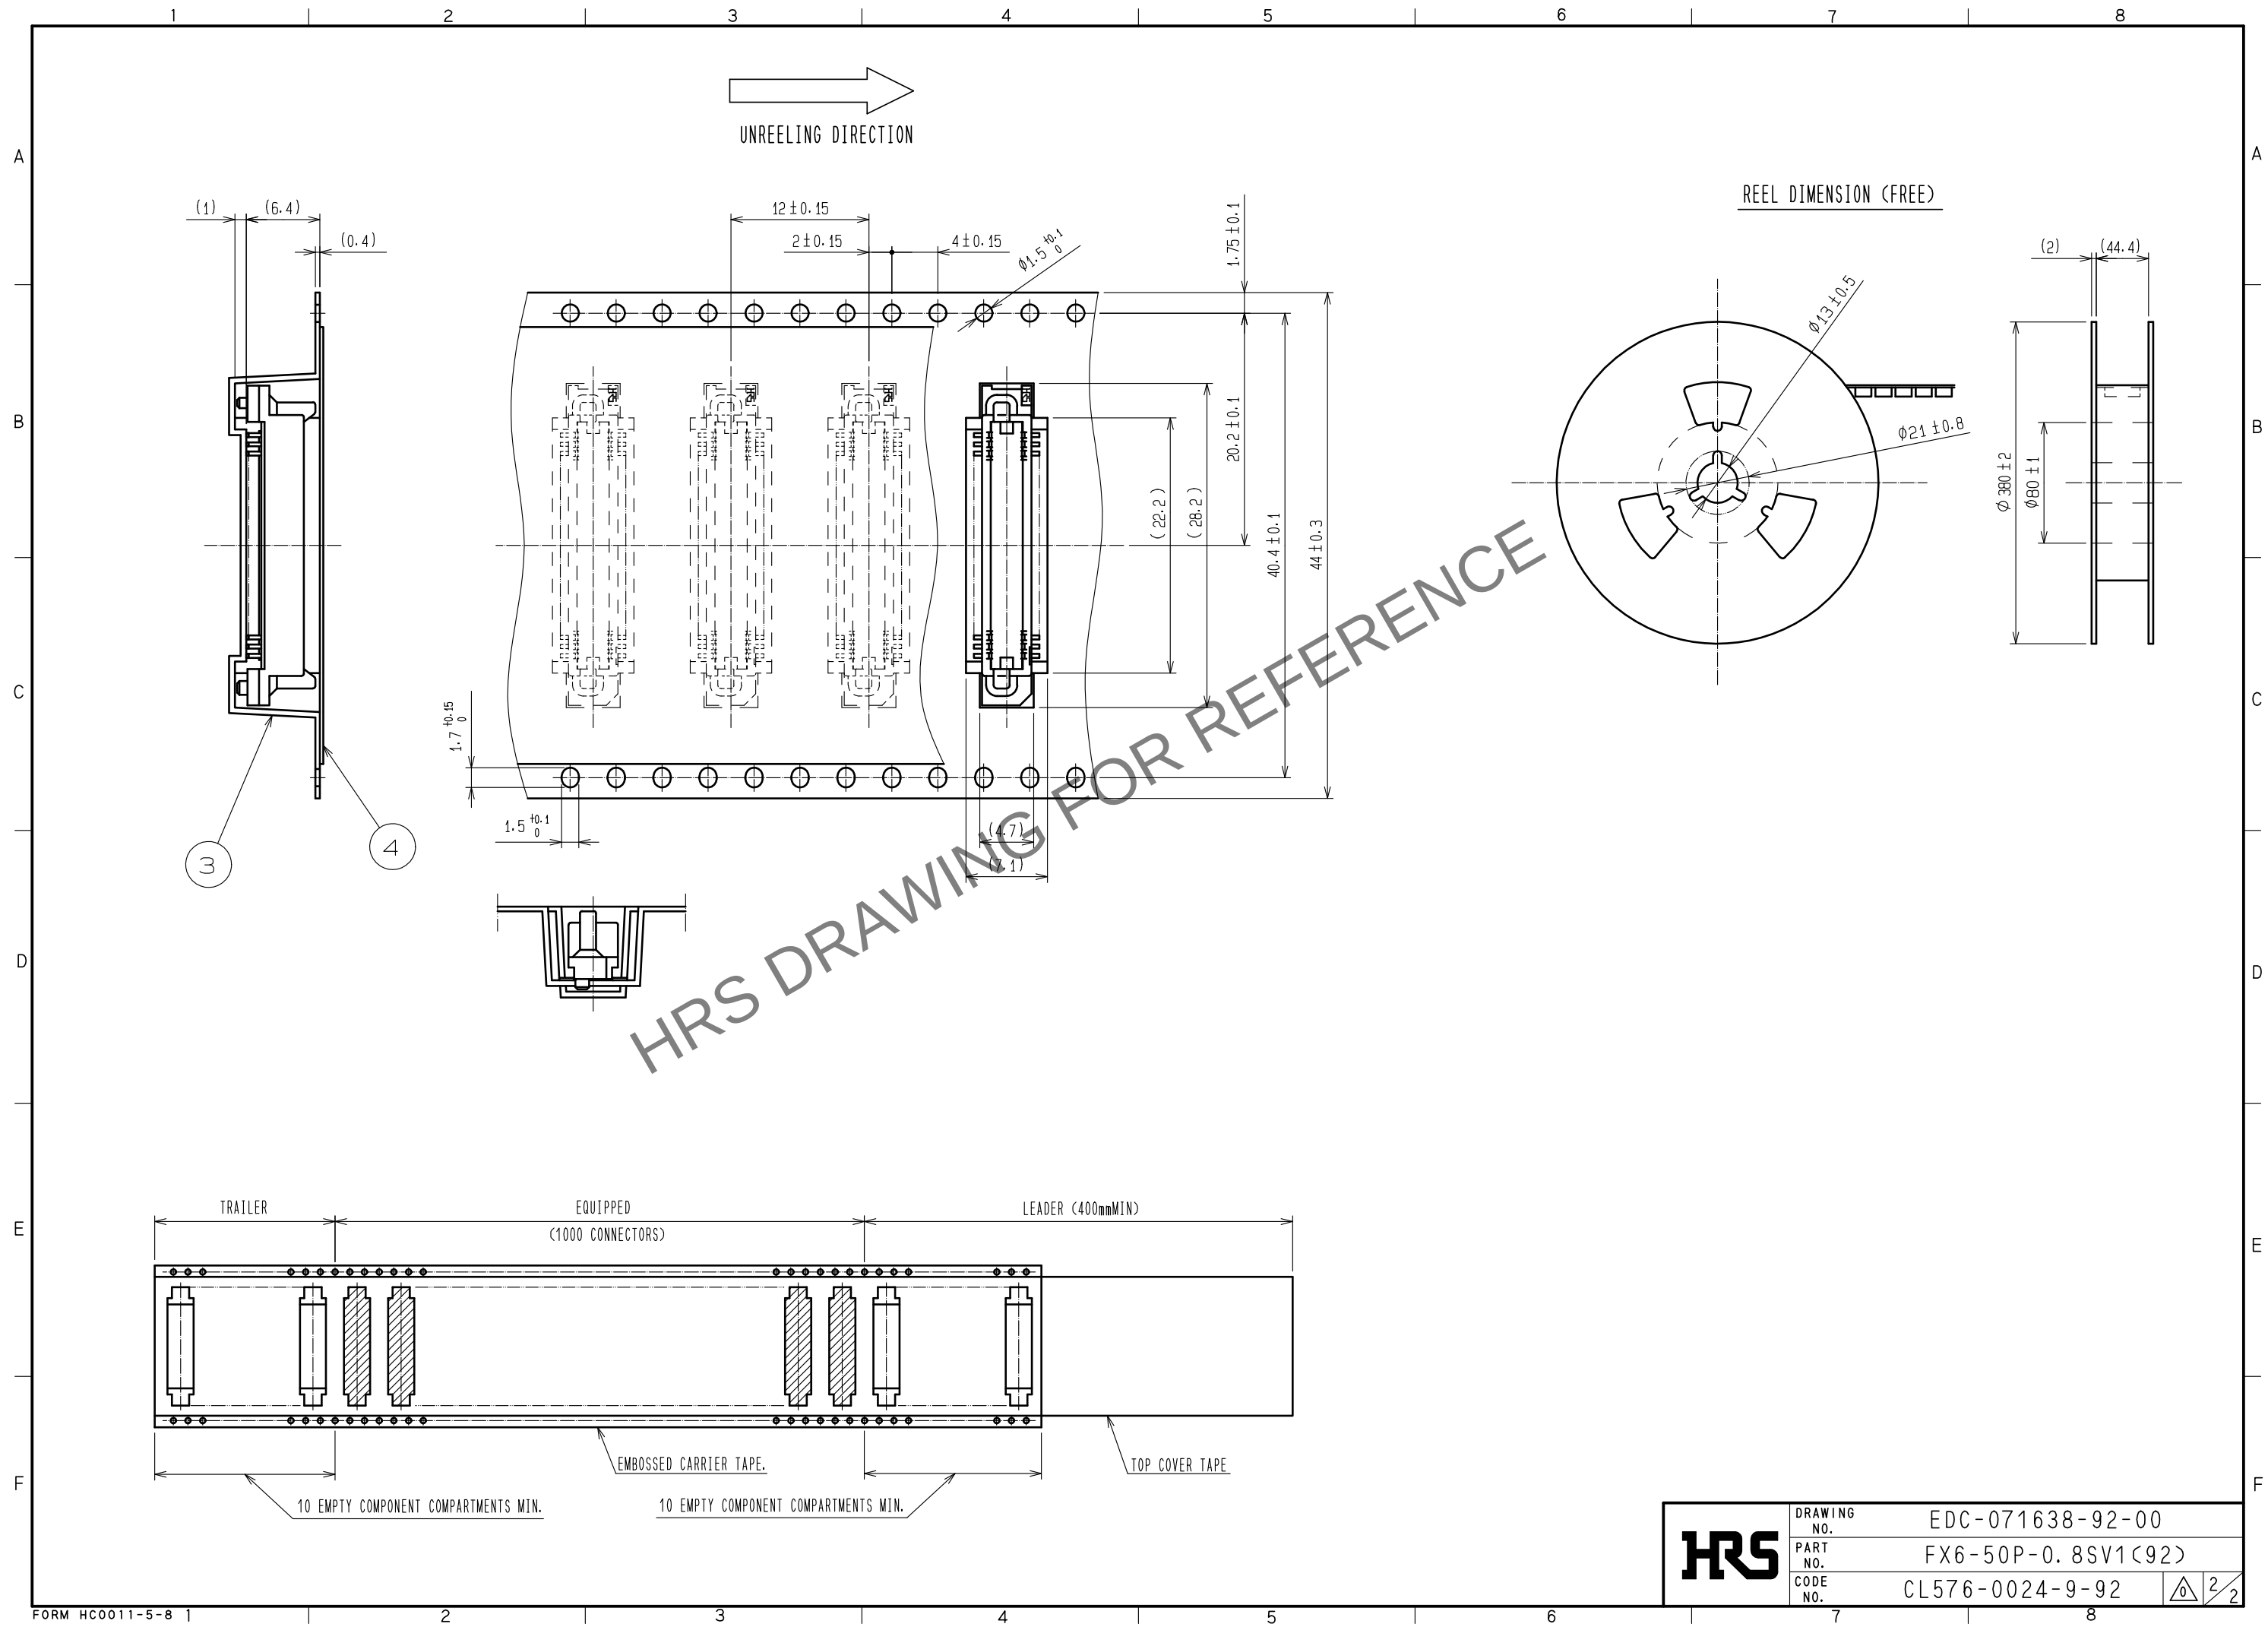

HRS	DRAWING NO.	EDC-071638-92-00
	PART NO.	FX6-50P-0.8SV1(92)
	CODE NO.	CL576-0024-9-92
		2/2