




Heyco® Nylon PCB Supports - Threaded Male

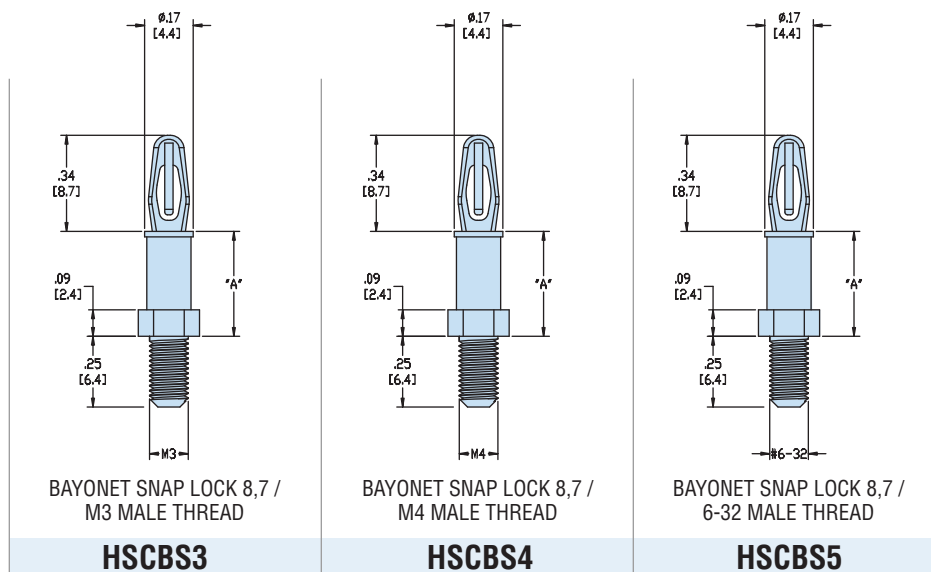

		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter		Maximum Thread Lg †		Mounting Hole Diameter	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB		.062	1,6	.125	3,2	.062	1,6	.125	3,2	.062	1,6	.125	3,2
Chassis		.250	6,4		M3	.250	6,4		M4	.250	6,4	6-32	
A		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION	
in.	mm.	Natural				Natural				Natural			
.125	3,2	10716		HSCBS3-02		10726		HSCBS4-02		10736		HSCBS5-02	
.187	4,8	10717		HSCBS3-03		10727		HSCBS4-03		10737		HSCBS5-03	
.250	6,4	10718		HSCBS3-04		10728		HSCBS4-04		10738		HSCBS5-04	
.312	7,9	10719		HSCBS3-05		10729		HSCBS4-05		10739		HSCBS5-05	
.375	9,5	10720		HSCBS3-06		10730		HSCBS4-06		10740		HSCBS5-06	
.437	11,1	10721		HSCBS3-07		10731		HSCBS4-07		10741		HSCBS5-07	
.500	12,7	10722		HSCBS3-08		10732		HSCBS4-08		10742		HSCBS5-08	
.562	14,3	10723		HSCBS3-09		10733		HSCBS4-09		10743		HSCBS5-09	
.625	15,9	10724		HSCBS3-10		10734		HSCBS4-10		10744		HSCBS5-10	

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

†Thread length at Chassis

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: .4°F (-18°C) to 185°F (85°C)

*Quick
Specs*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[10732F](#) [10724F](#) [10718F](#) [10731F](#) [10740F](#) [10716F](#) [10726F](#) [10719F](#) [10729F](#) [10737F](#) [10717F](#) [10741F](#) [10730F](#)
[10739F](#) [10728F](#) [10736F](#) [10738F](#) [10727F](#) [10734F](#) [10744F](#) [10721F](#) [10723F](#) [10733F](#) [10743F](#) [10722F](#) [10742F](#)
[10720F](#)