
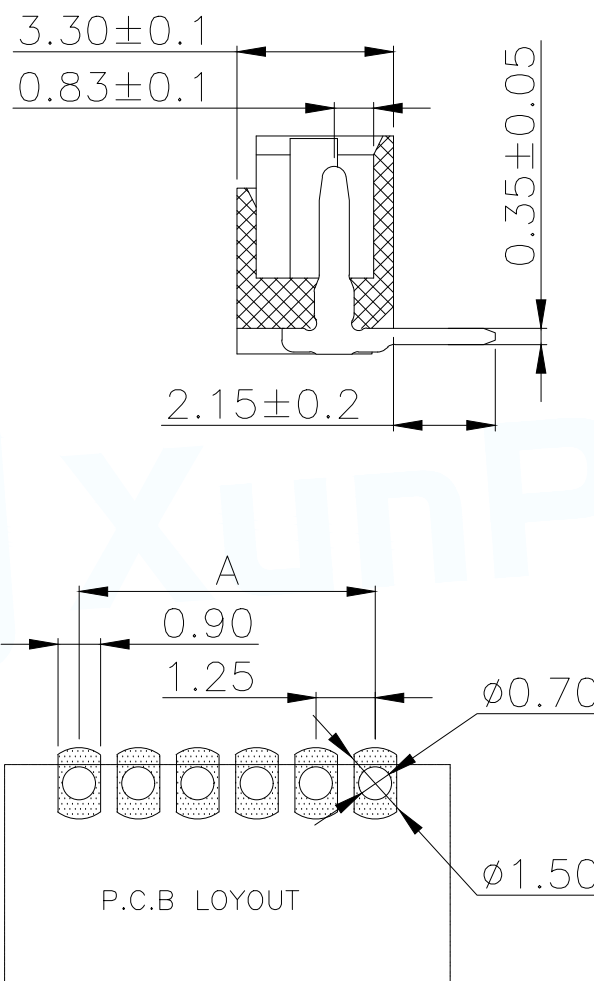


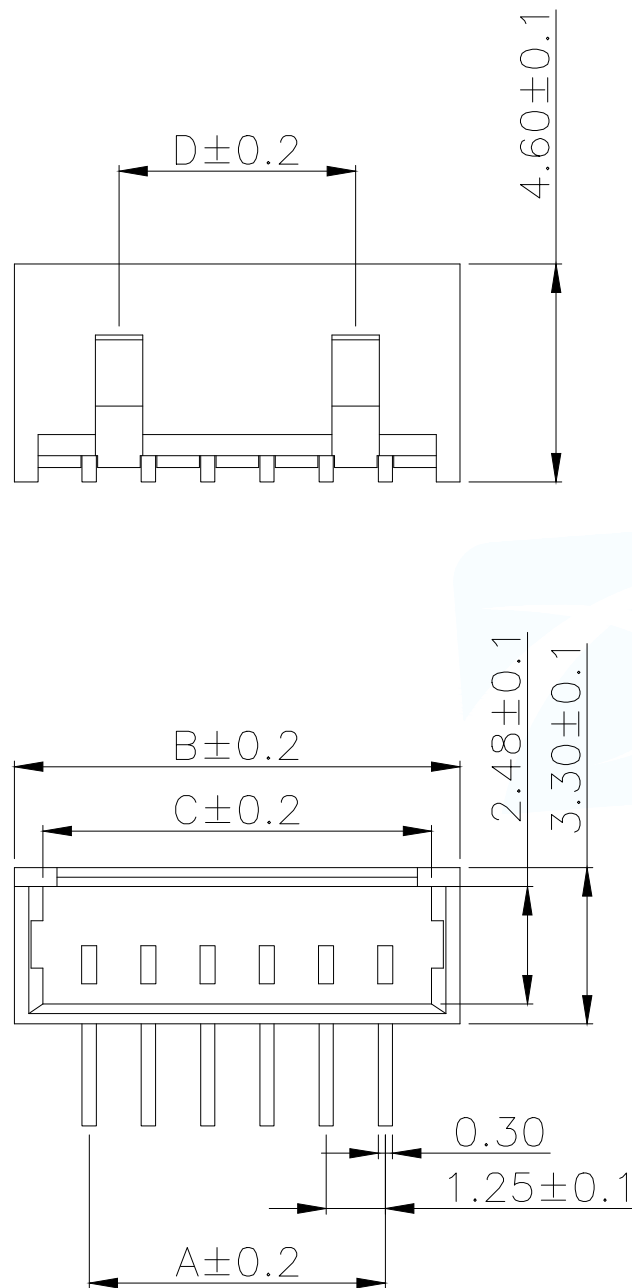

Part No	Pin	A	B	C	D
WAFER-MX1.25-2PWZ	2	1.25	4.40	3.20	
WAFER-MX1.25-3PWZ	3	2.50	5.65	4.45	
WAFER-MX1.25-4PWZ	4	3.75	6.90	5.70	2.50
WAFER-MX1.25-5PWZ	5	5.00	8.15	6.95	3.75
WAFER-MX1.25-6PWZ	6	6.25	9.40	8.20	5.00
WAFER-MX1.25-7PWZ	7	7.50	10.65	9.45	6.25
WAFER-MX1.25-8PWZ	8	8.75	11.90	10.70	7.50
WAFER-MX1.25-9PWZ	9	10.00	13.15	11.95	8.75
WAFER-MX1.25-10PWZ	10	11.25	14.40	13.20	10.00
WAFER-MX1.25-11PWZ	11	12.50	15.65	14.45	11.25
WAFER-MX1.25-12PWZ	12	13.75	16.90	15.70	12.50
WAFER-MX1.25-13PWZ	13	15.00	18.15	16.95	13.75
WAFER-MX1.25-14PWZ	14	16.25	19.40	18.20	15.00
WAFER-MX1.25-15PWZ	15	17.50	20.65	19.45	16.25
WAFER-MX1.25-16PWZ	16	18.75	21.90	20.70	17.50

NOTES:

- 1.BASE: PA
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100M Ω Min
- 5.Contact Resistance: 20m Ω Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25 $^{\circ}$ ~+ 85 $^{\circ}$

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: WAFER 1.25 弯针	
X.: ± 0.2	X':: $\pm 5^{\circ}$	PAR	WAFER-MX1.25-NPWZ
.X: ± 0.1	X.X':: $\pm 3^{\circ}$	DWN	
.XX: ± 0.05	X.XX':: $\pm 1^{\circ}$	CHKD	
CUSTOMER COPY		APVD	
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A