



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHXDZ-SMD9650-3V 有源

產品名稱 (Description):

蜂鸣器 (Buzzer)

產品規格 (Specification):

SMD-9.6*9*6*5.0MM

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: jacky.tang@jsxhxdz.com

Http: www.jsxhxdz.com


深圳市兴华鑫电子科技有限公司

产品规格内容

1. SPECIFICATION 规格

No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	3000	
2	Operating Voltage	VDC	2 ~ 5	
3	Rated Voltage	VDC	3	
4	Current Consumption	mA	MAX. 30	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 85	at 10cm at Rated Voltage
6	Operating Temperature	℃	-20 ~ +80	
7	Storage Temperature	℃	-30 ~ +85	
8	Dimension	mm	9.6x 9.6x H5.0	See appearance drawing
9	Weight (MAX)	gram	2	
10	Housing Material		PPS(Black)	
11	Leading Pin		Tin Plated Brass(Au)	See appearance drawing
12	Environmental Protection Regulation		RoHS	

2. APPEARANCE DRAWING 尺寸图

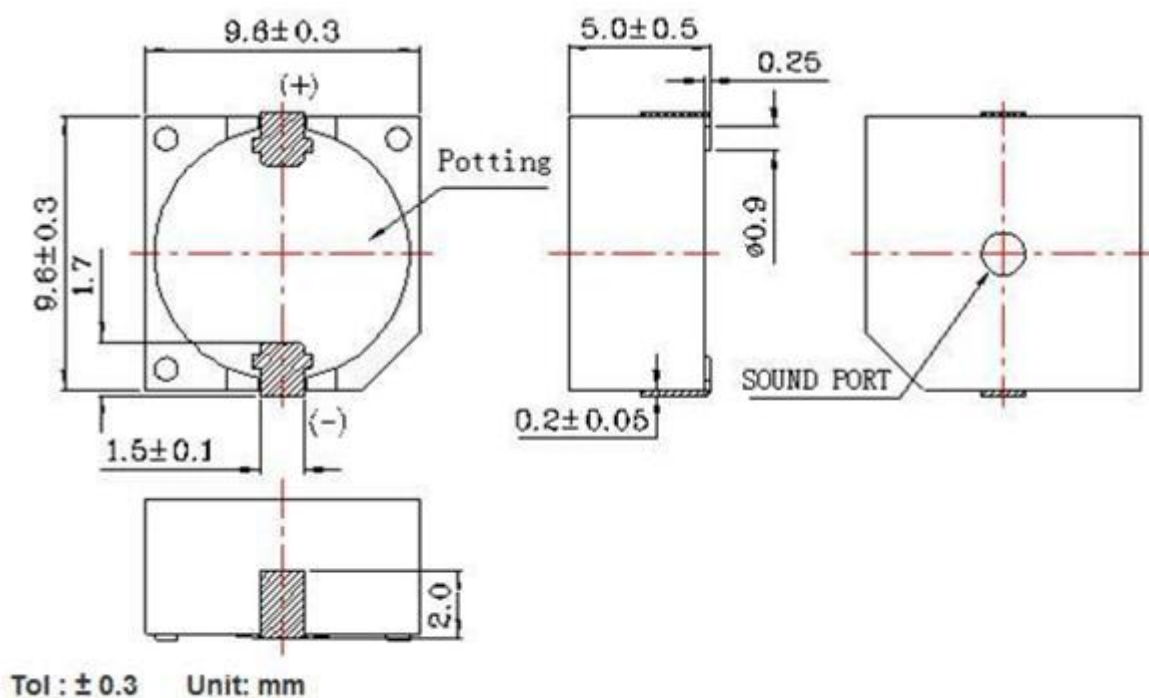

深圳市兴华鑫电子科技有限公司

产品规格内容

3. TESTING METHOD 测量方式


Standard Measurement conditions

Temperature: $25 \pm 2^\circ\text{C}$ Humidity: 45-65%


Acoustic

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below


Characteristics:

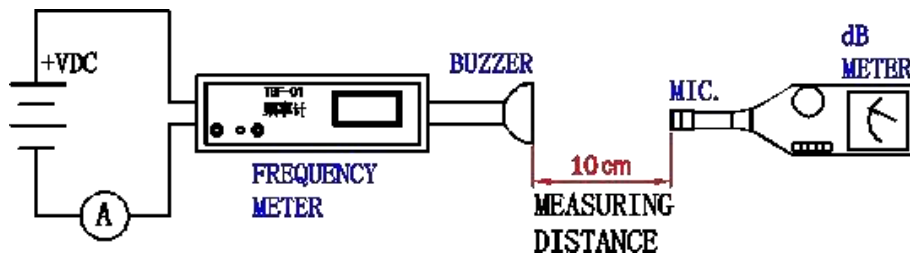

In the measuring test, buzzer is placed as follows:

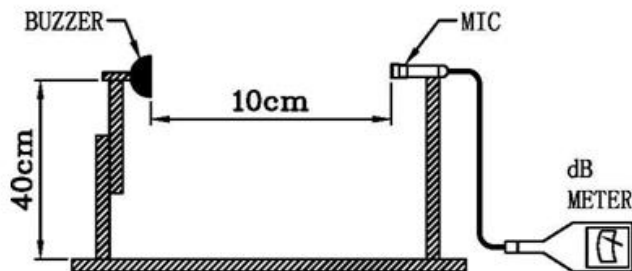

4. VOLTAGE/ CURRENT/ SOUND PRESSURE CHARACTERISTICS

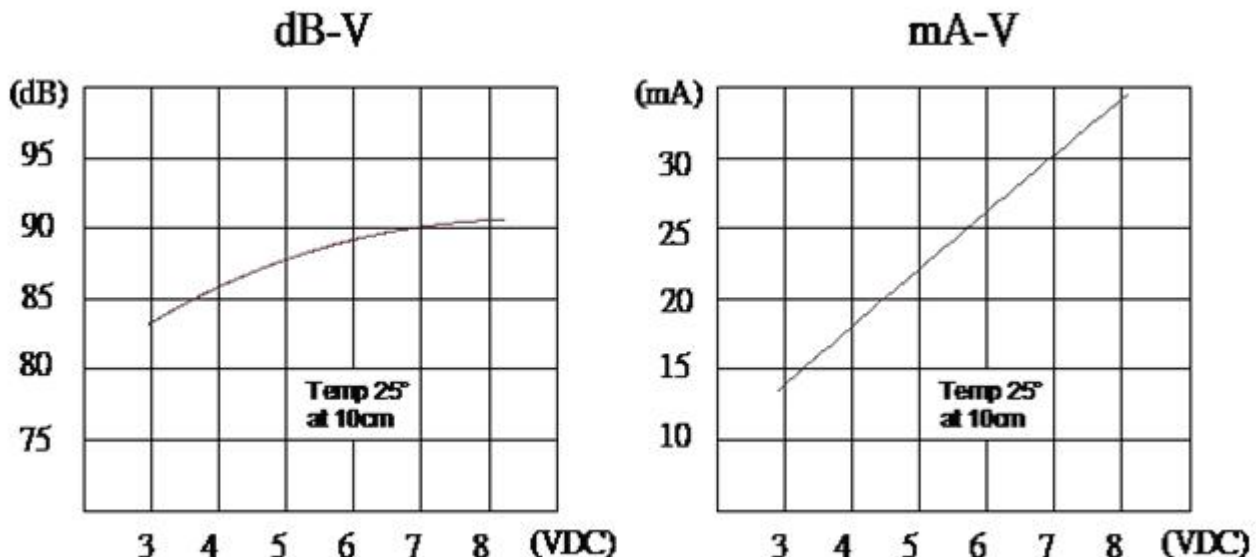

深圳市兴华鑫电子科技有限公司


产品规格内容

5.Soldering Condition

(1) Recommendablereflowsolderingconditionis as follows

(Reflowsolderingis twice)

Note:Itis requestedthatreflowsolderingshouldbeexecuted
afterheatof productgoesdownto normal.

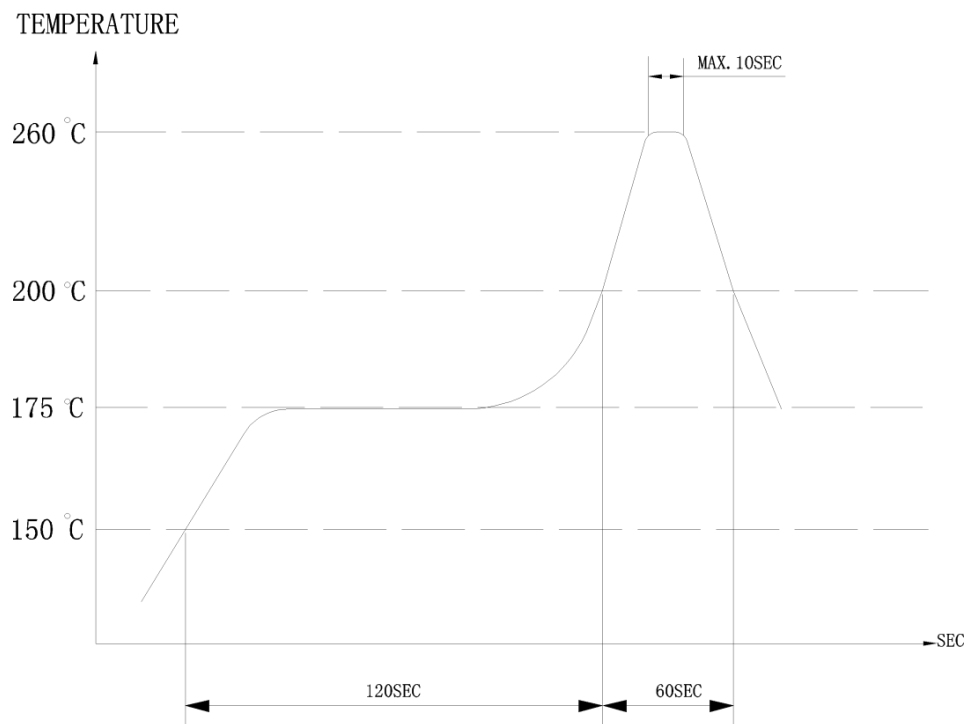


Heat resistant line (Usedwhenheatresistantreliabilitytestis
performed) (2)Manualsoldering

Manual soldering temperature 350 °C within 5 sec.

深圳市兴华鑫电子科技有限公司

产品规格内容




6.RELIABILITYTEST 可靠性测试

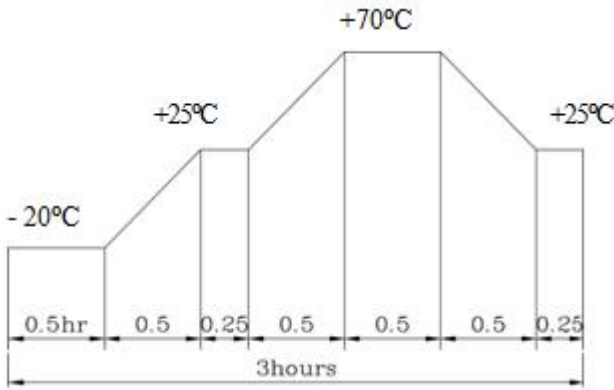NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	Afterbeingplacedina chamberwith80 °Cfor96 hoursandthen beingplacedinnormalconditionfor2 hours. AllowablevariationofSPLaftertest: 10dB.
2	Low Temperature Test (Storage)	AfterbeingPlacedina chamberwith-30 °Cfor96 hoursandthen beingplacedinnormalconditionfor2 hours. AllowablevariationofSPLaftertest: 10dB.
3	Humidity Test	AfterbeingPlacedina chamberwith90-95%R.H.at40 °C for96 hoursandthenbeingplacedinnormalconditionfor2 hours. AllowablevariationofSPLaftertest: 10dB.
4	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of:  AllowablevariationofSPLaftertest: 10dB.
5	Drop Test	Dropona hardwoodboardof 4cmthick,anydirections,6 times, at theheightof 75cm. AllowablevariationofSPLaftertest: 10dB.
6	Vibration Test	Afterbeingappliedvibrationofamplitudeof 1.5mmwith 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2hours . Allowablevariationof SPLaftertest: 10dB.
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersedinsolderbathof+300 °Cfor3 1seconds . 90% min. leadterminalsshallbewetwithsolder (Excepttheedgeofterminals).
8	Terminal Strength Pulling Test	Theforceof 9.8N(1.0kg) isappliedtoeachterminalinaxialdirectionfor 10 seconds. No visible damage and cutting off.

深圳市兴华鑫电子科技有限公司

产品规格内容

7.PACKINGSTANDARD 包装

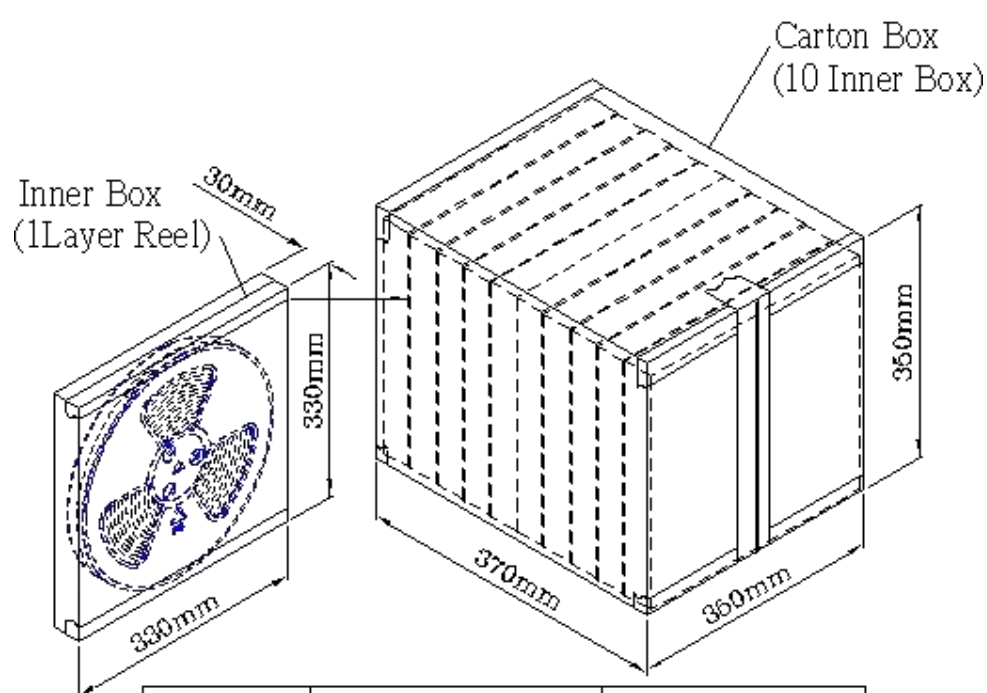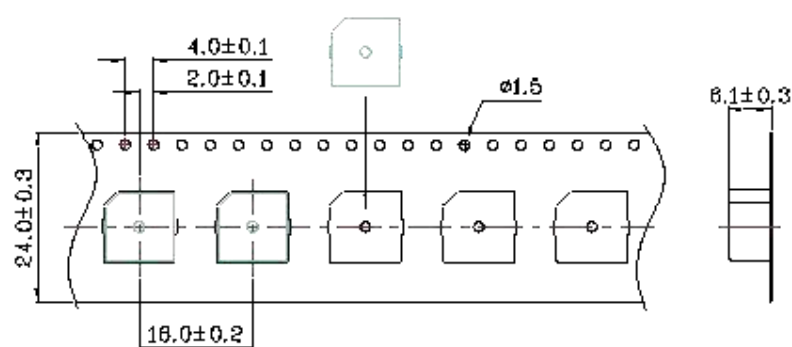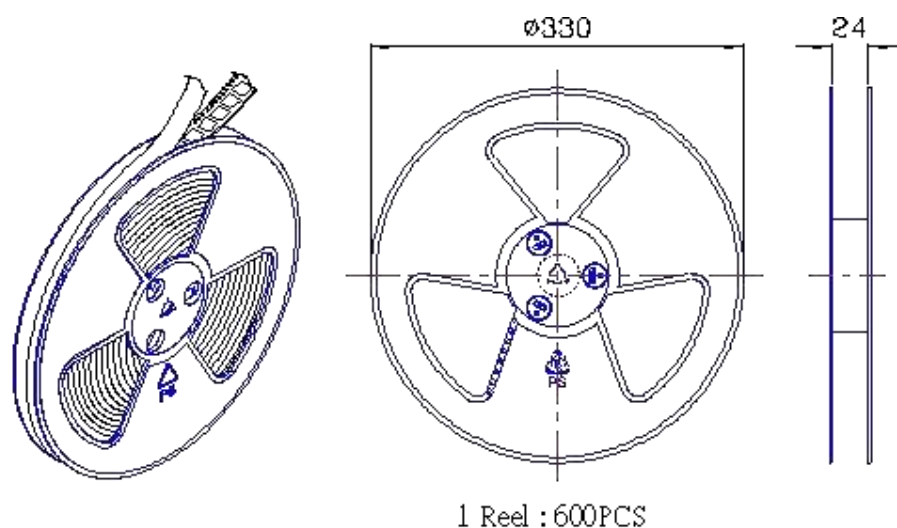

Inner Box	330mmx330mmx30mm	1x600PCS=600PCS
Carton Box	350mmx350mmx370mm	10x600PCS=6,000PCS