

RIF-1-V8/PT/FLK14/OUT - System connection



2905195

<https://www.phoenixcontact.com/us/products/2905195>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



V8 adapter for 8 x RIF-1 relay base, controller: PLC system cabling of output cards, connection 1: Push-in connection 4x, connection 2: IDC/FLK pin strip 1x 14-position, connection 3: Plug-in connection, number of channels: 8, control logic: positive switching

Commercial data

Item number	2905195
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C421
Product key	CK21D1
Catalog page	Page 359 (C-5-2019)
GTIN	4046356946650
Weight per piece (including packing)	86.7 g
Weight per piece (excluding packing)	80 g
Customs tariff number	85366990
Country of origin	DE

RIF-1-V8/PT/FLK14/OUT - System connection



2905195

<https://www.phoenixcontact.com/us/products/2905195>

Technical data

Product properties

Product type	Interface module
Product family	RIFLINE complete
Number of positions	14
No. of channels	8
Operating mode	100% operating factor

Data management status

Article revision	04
------------------	----

Insulation characteristics: Air clearances and creepage distances

Overvoltage category	II
Pollution degree	2

Electrical properties

Nominal voltage U_N	30 V DC
Protective circuit	Power supply; Polarity protection diode
	Signal level; Freewheeling diode per channel
Max. current carrying capacity per branch	1 A (per signal path)
Max. total current of voltage supply	3 A

Air clearances and creepage distances

Rated insulation voltage	63 V DC
Rated surge voltage	0.6 kV (Functional insulation)

Supported controller SIEMENS S7-1500

Suitable I/O card	6ES7522-1BH00-0AB0
	6ES7522-1BH01-0AB0
	6ES7522-1BL00-0AB0
	6ES7522-1BL01-0AB0
	6ES7522-1BP00-0AA0

Supported controller SIEMENS S7-400

Suitable I/O card	6ES7422-1BL00-0AA0
	6ES7422-1BL00-0AA0

Supported controller ALLEN-BRADLEY ControlLogix

Suitable I/O card	1756-OB32
	1756-OB16E

Supported controller ALLEN-BRADLEY PLC 5

Suitable I/O card	1771 OBN
-------------------	----------

Supported controller ALLEN-BRADLEY SLC 500

Suitable I/O card	1746 OB16
-------------------	-----------

RIF-1-V8/PT/FLK14/OUT - System connection



2905195

<https://www.phoenixcontact.com/us/products/2905195>

	1746 OB 32
Supported controller HONEYWELL Experion PKS C200	
Suitable I/O card	TC-ODD 321
Supported controller MITSUBISHI MELSEC Q	
Suitable I/O card	QY81P
	QY82P
Supported controller SIEMENS S7-300 / ET 200 M	
Suitable I/O card	CPU 313C-2DP
	CPU 314C-2DP
	CPU 314C-2PtP
	6ES7322-1BH01-0AA0
	6ES7322-1BL00-0AA0
	6ES7323-1BH01-0AA0
	6ES7323-1BL00-0AA0
	CPU 313C
	CPU 313C-2PtP
Supported controller ABB S800 I/O	
Suitable I/O card	DO810
	DO840
Supported controller EMERSON DeltaV	
Suitable I/O card	VE4002S1T1B3
	VE4002S1T2B3
	VE4002S1T2B3 Series 2
	VE4002S1T2B6
Supported controller GE-FANUC RX3i	
Suitable I/O card	IC694MDL754
Supported controller MITSUBISHI MELSEC L	
Suitable I/O card	LY41PT1P
	LY42PT1P

Connection data

Supply

Connection method	Push-in connection
Stripping length	10 mm
Number of connections	4
Conductor cross section rigid	0.2 mm² ... 1.5 mm²
Conductor cross section flexible	0.2 mm² ... 1.5 mm²
Conductor cross section AWG	24 ... 16

Controller level

RIF-1-V8/PT/FLK14/OUT - System connection



2905195

<https://www.phoenixcontact.com/us/products/2905195>

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	14
Pitch	2.54 mm
Connection method	Plug-in connection

Signaling

Status display	Yellow LED/per channel
Status display present	Yes
Operating voltage display	Green LED

Dimensions

Item dimensions

Width	130.4 mm
Height	31.9 mm
Depth	38.13 mm

Material specifications

Color	gray (RAL 7042)
Housing insulation material	PA

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

Approvals

UL, USA

Identification	UL 508 Recognized
----------------	-------------------

CSA

Identification	CSA-C22.2 No. 14-13
	CSA-C22.2 No. 158-10

Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN IEC 60664-1
-----------------------	----------------

Mounting

Assembly note	Can be plugged into 8 x RIFLINE complete RIF-1 relay bases
Mounting position	any

Notes

RIF-1-V8/PT/FLK14/OUT - System connection



2905195


<https://www.phoenixcontact.com/us/products/2905195>

Notes on operation

For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.


Drawings


Circuit diagram

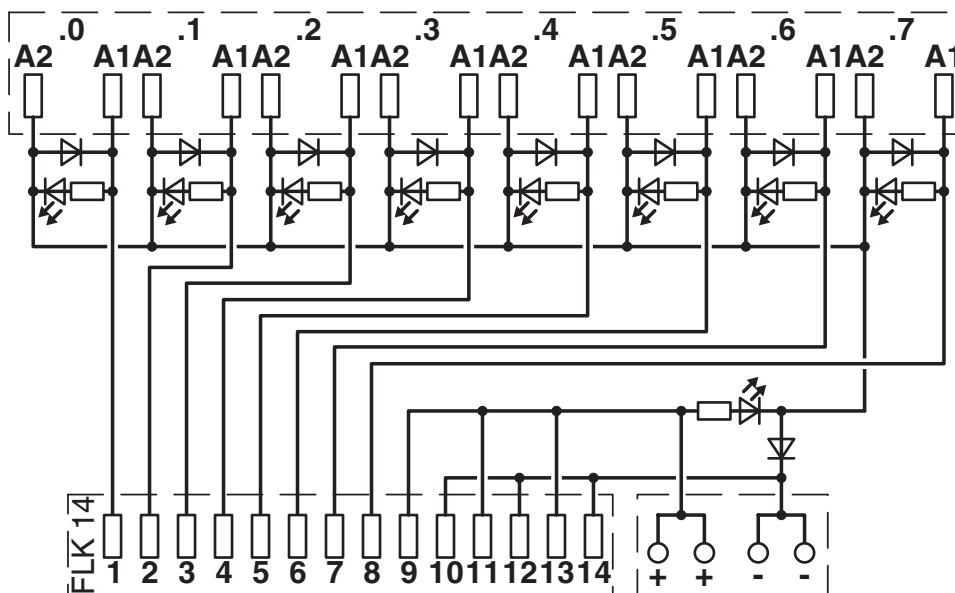


Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905195>

 cUL Recognized Approval ID: E238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	1 A	-	-

 UL Recognized Approval ID: E238705				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	1 A	-	-

 CSA Approval ID: 76787				
---	--	--	--	--

cULus Recognized				
-------------------------	--	--	--	--

RIF-1-V8/PT/FLK14/OUT - System connection



2905195

<https://www.phoenixcontact.com/us/products/2905195>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	c6569905-5808-460a-b12b-e23f071cd945