


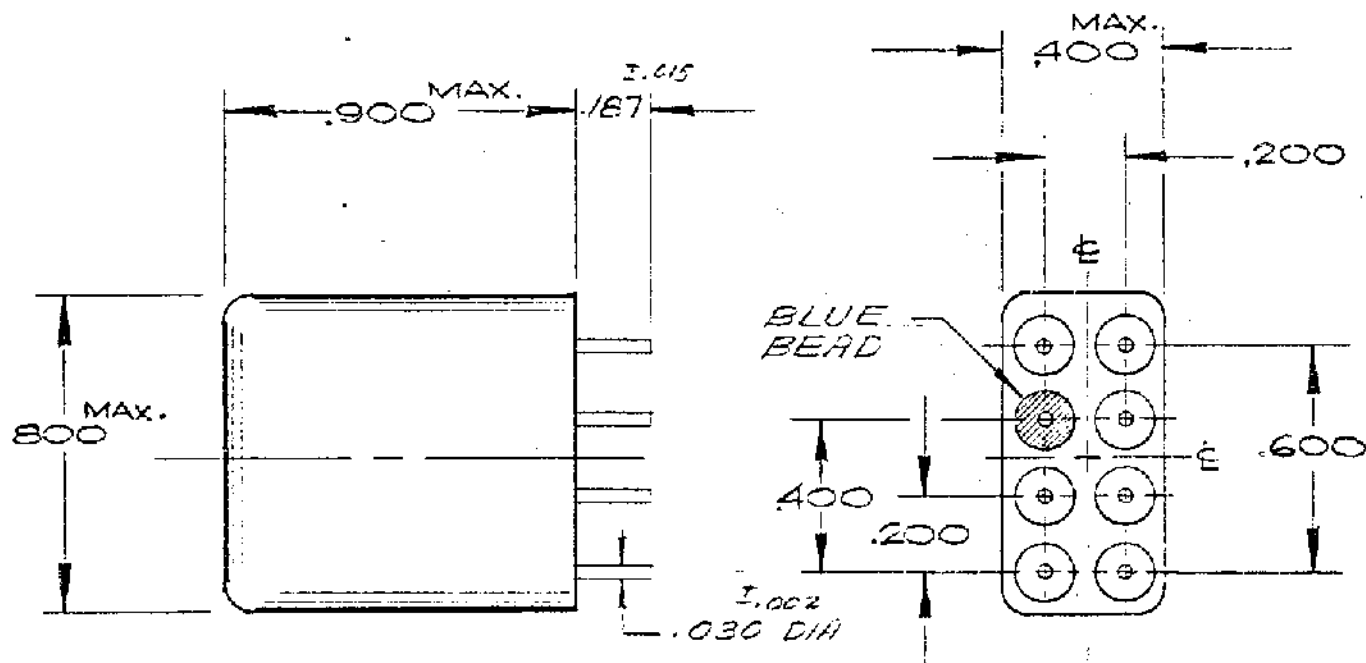

COIL: @ 25° C

RESISTANCE 200 OHMS + 5% - 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.8 VDC

MUST RELEASE 0.7 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 20 g's


SHOCK 100 g's 11 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS ±.005 FRACTIONAL ± 1/64

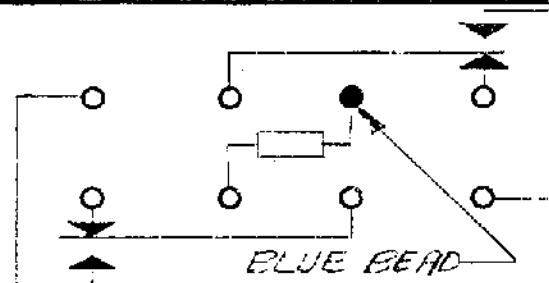

CONTACT RATING: Low Level to 5A @ 28 VDC

DR. 15-20-87

CK. JMB



Communications
Instruments, Inc.

CUST. C.T.I. Std.

CUST. NO.

TYPE FW RELAY

FW5A1201D00